DWG. NO.
GV6-0003

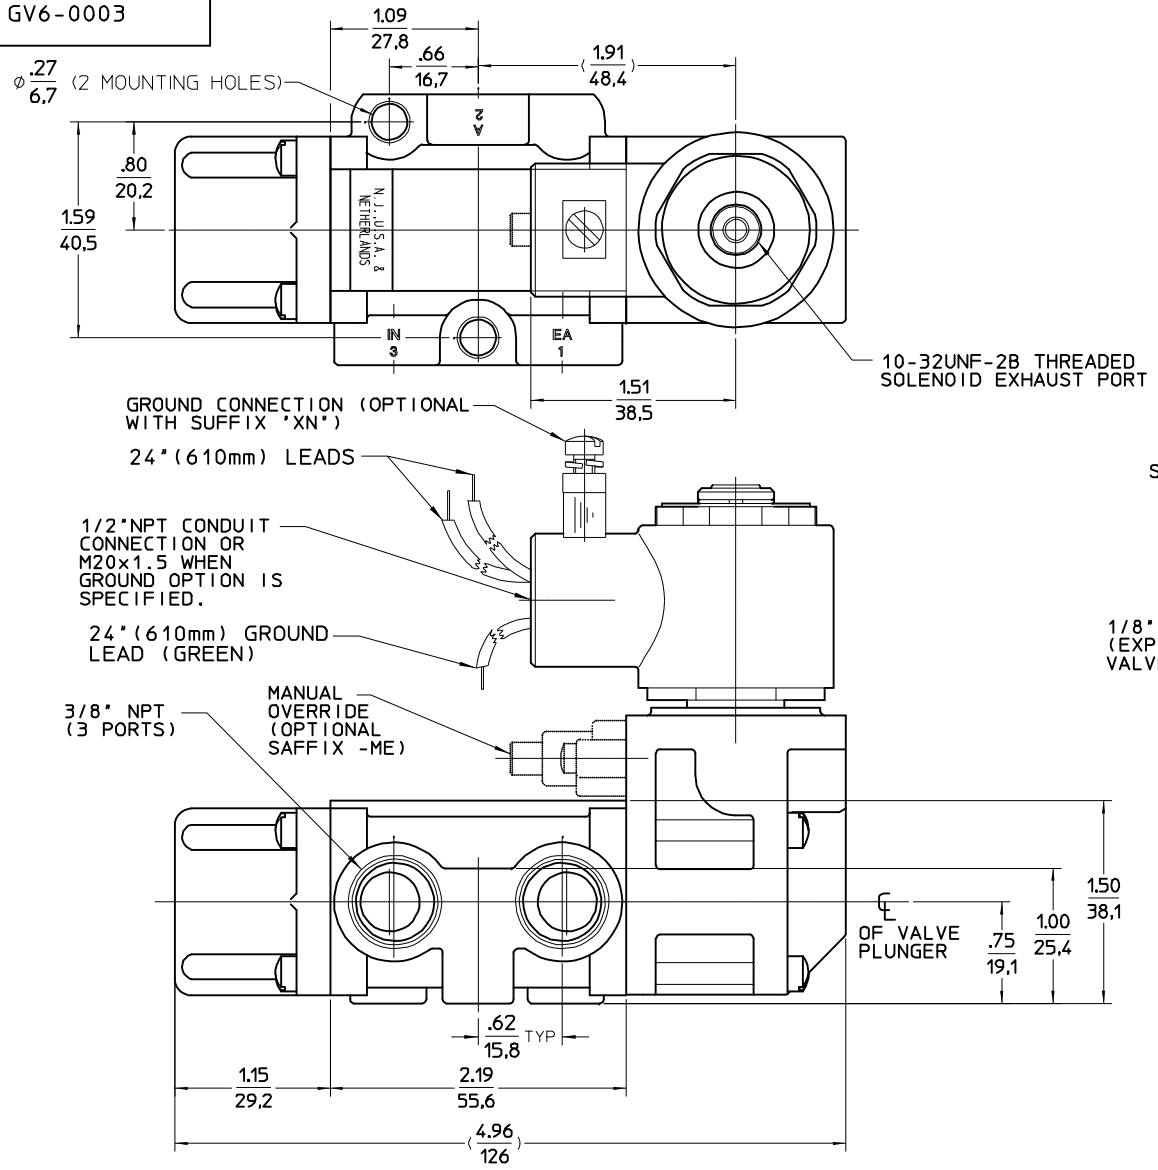


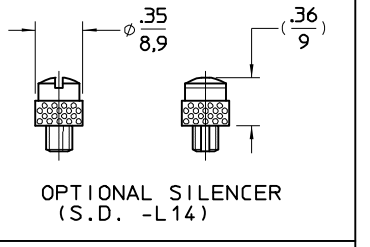


FLOW SCHEMATIC

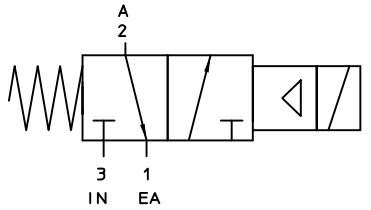


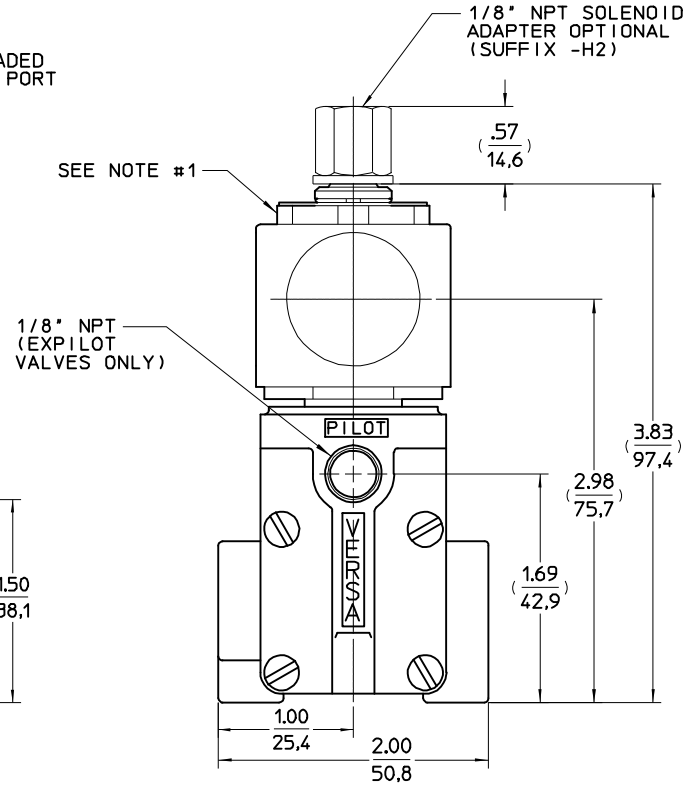


IN
mm

NOTES:
1) TO REORIENT CONDUIT CONNECTION LOOSEN NUT AND ROTATE SOLENOID. NUT MUST BE RETIGHTENED TO A TORQUE SETTING OF 55 INCH-LBS.
2) PRODUCT IS SHOWN WITH GROUND CONNECTION OPTION.
3) PRODUCT IS SHOWN WITH STANDARD 24" LONG WIRE LEADS. OTHER WIRE LEAD LENGTHS ARE AVILABLE BY SPECIFYING THE APPROPRIATE SUFFIX DETAIL NUMBER.

| LTR | REVD/CKD BY | DESCRIPTION | EWR NO/APPD BY |
|---|---|---|---|
| D | NG 12-20-12 | UPDATED DRAWING. | 16550 |
| | WJ 12-21-12 | | BN 12-21-12 |

REVISION LEVEL

| | | | | |
|---|---|---|---|---|
| DRAWN BY MR 9-20-99 | CHECKED BY JC 9-22-99 | ENG APP'D BN 9-23-99 | ORIG EWR 10536 | TITLE |
| MATL | SCALE 1:1 | NEXT ASSY | DWG SIZE B | VALVE ASSEMBLY |

HARDNESS
HEAT TREAT
FINAL FINISH

UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMAL ±.010 ANGULAR DIMENSIONS ±1/2°
3 PLACE DECIMAL ±.003 BREAK CORNERS & EDGES .010
DIA'S ON SAME CENTERLINE CONCENTRIC WITHIN .006 T.I.R.
MACHINED SURFACES, FINISHED TO 64 R.M.S. MAX.
DO NOT SCALE DRAWING

THIS DRAWING IS CAD GENERATED AND THE PROPERTY OF VERSA PRODUCTS CO. INC.
USE AND/OR REPRODUCTION OF ANY PORTION MUST BE WITH THE APPROVAL OF VERSA

VERSA PRODUCTS CO., INC.
PARAMUS N.J., U.S.A.
VERSA BV, NETHERLANDS

DWG. NO.
GV6-0003