

MEGALINEAR



MEGADYNE

| | | | |
|-----------------------------------|-----------|--|------------|
| Introduction to open-end belts | 2 | RPP14XHP | 66 |
| Classifications | 4 | STD5 | 68 |
| Technical calculation | 6 | STD8 | 70 |
| Linear motion calculation example | 8 | HG | 72 |
| Conveyor belt calculation example | 9 | TG5 | 74 |
| Calculation parameters | 10 | TG10 | 76 |
| Belt installation | 12 | TG20 | 78 |
| Belt data | | ATG5 | 80 |
| MXL | 14 | ATG10 | 82 |
| XL | 16 | ATG20 | 84 |
| L | 18 | QST5 | 86 |
| H | 20 | QST8 | 88 |
| XH | 24 | QST14 | 90 |
| T2,5 | 26 | GW14 | 92 |
| T5 | 28 | GW20 | 94 |
| TT5 | 32 | FLAT | 96 |
| T10 | 34 | Fixing plates | 98 |
| T20 | 40 | Positioning and transmission precision | 101 |
| AT3 | 42 | Cleats | 102 |
| AT5 | 44 | Cover properties | 116 |
| AT10 | 46 | Special execution feasibility | 118 |
| AT20 | 50 | Antistatic polyurethane timing belts | 119 |
| MTD3 | 52 | Special execution photos | 120 |
| MTD5 | 54 | Data sheet | 122 |
| MTD8 | 56 | | |
| MTD14 | 58 | | |
| RPP5 | 60 | | |
| RPP8 | 62 | | |
| RPP14 | 64 | | |




INTRODUCTION TO OPEN-END BELTS

Megadyne commenced manufacturing transmission belts in 1957 and extruding open end belts in 1975. Megalineer open length belts are manufactured in thermoplastic polyurethane, that gives superior wear and abrasion resistance. Various grade of steel cords offer good running characteristics even with high tractive load.

Great production flexibility grant to designers possibility to match any technical requirement and solution.

By selecting different components and material, Megalineer belts can be manufactured to meet every customer requirement.



Megalinear open-end belts are particularly suitable for application where accuracy of positioning, low noise and free-maintenance are requested.

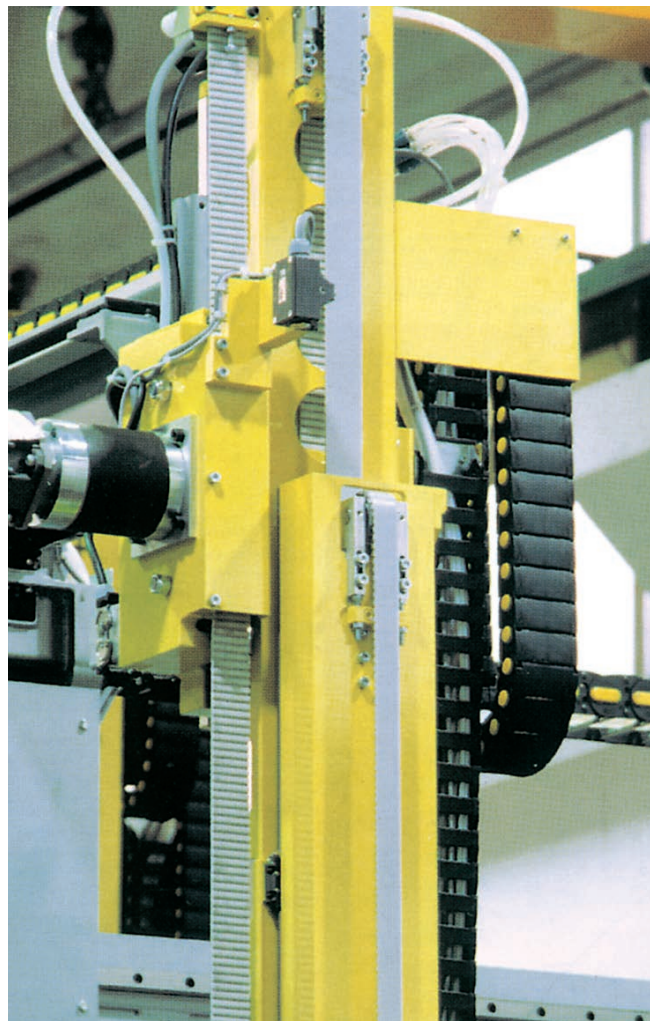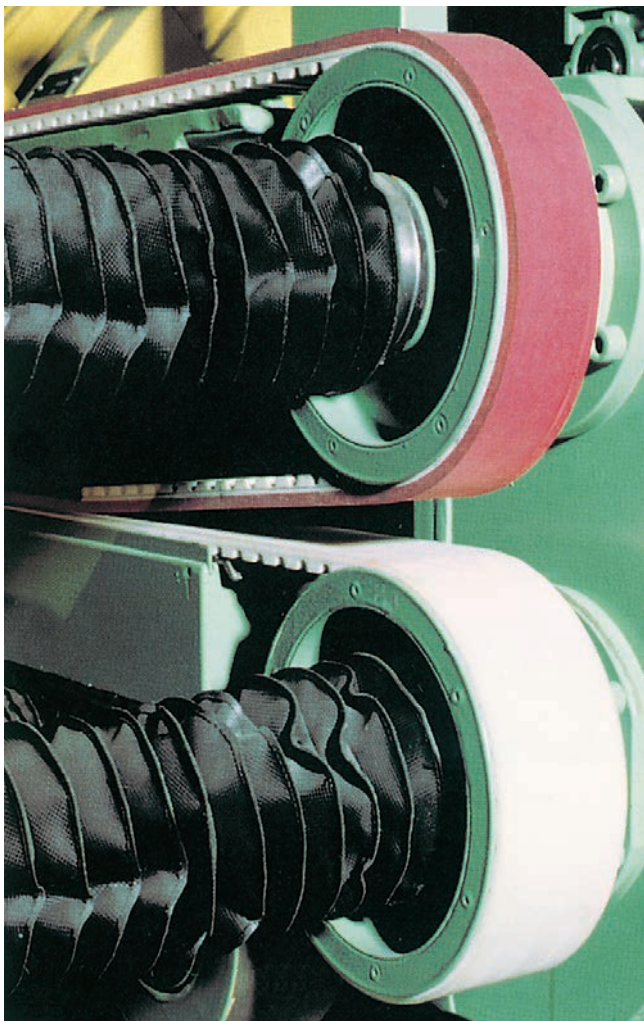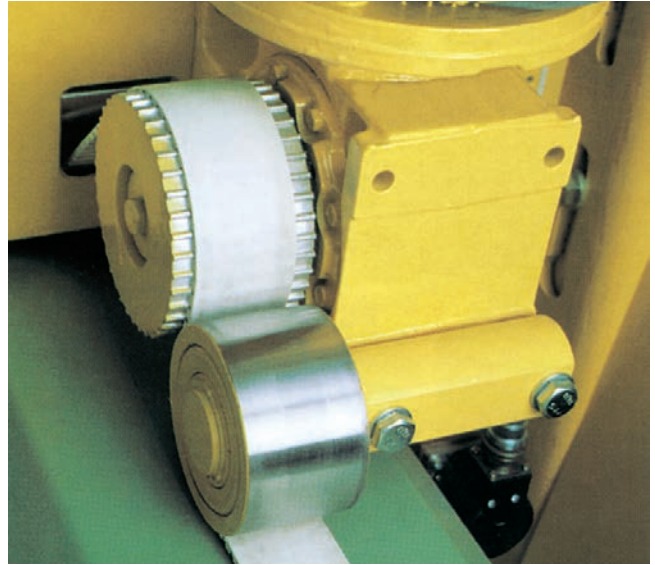

INTRODUCTION TO OPEN-END BELTS

Thanks to their features, Megalineer belts can be successfully used in a wide range of application such as:

- conveyors
- automatic sliding doors and garage opening system
- elevators
- automated handling devices
- linear drivers
- positioning system
- wood industry
- textile machine
- serigraphic industry
- glass industry
- stone and marble industry
- packaging industry
- robot systems
- tobacco industry
- paper and carton industry
- chemist and pharmaceutical industry

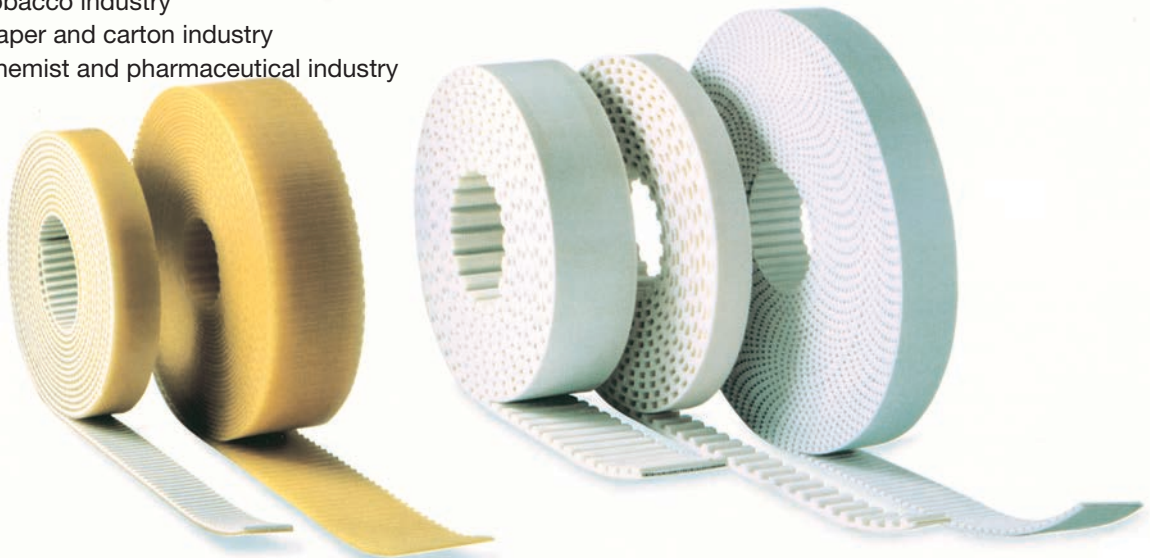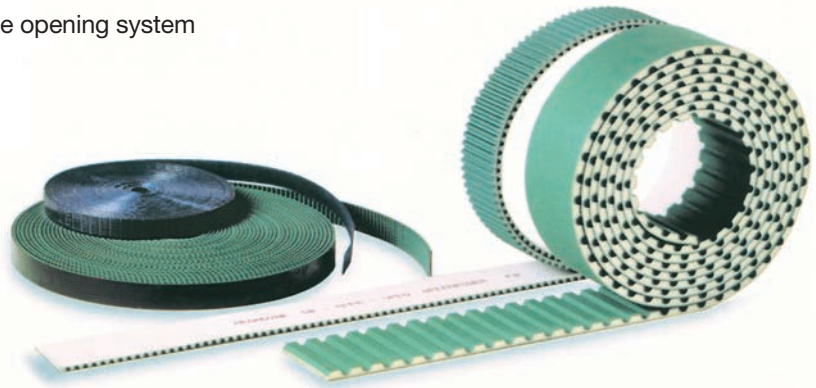

Megadyne has developed a very wide range of solutions with numerous tooth designs, tensile members and compound, suitable for all applications.

STANDARD RANGE



MXL • XL • L • H • XH



T2,5 • T5 • TT5 • T10 • T20



AT3 • AT5 • AT10 • AT20



MTD3 • MTD5 • MTD8 • MTD14




RPP5 • RPP8 • RPP14 • RPP14XHP



STD5 • STD8



HG • TG5 • TG10K6 • TG10K13 • TG20 • ATG5 • ATG10 • ATG20



QST5 • QST8 • QST14



GW14 • GW20




P1 • P2 • P3 • P4

CLASSIFICATIONS

CLASSIFICATIONS

Megalinear Timing Belts are manufactured in thermoplastic polyurethane, with single parallel steel cords. This type of belts, developed by our Research & Development, offers good running characteristics and high traction loads. They are especially suited for power transmission and conveying with high loads and speeds. The addition of a nylon coating on the teeth during production enhances the running properties for specific applications and reduces the noise due to a lower frictional coefficient. An extra thickness of special coating is also possible on the back of the belt offering extra protection against aggressive or heavy products.

1. The body of the belts is white thermoplastic polyurethane 92 ShA, characterized by high levels of wear resistance even in the presence of shock and surge loading.
2. High strength S and Z parallel zinked steel tension members allow high breaking load and extremely low elongation. The combination of these high grade materials improves belt performances which can be summarised as follows:
 - exceptional resistance to abrasion and tooth shear
 - low coefficient of friction
 - high flexibility
 - ozone and temperature resistance (-25 °C / +80 °C)
 - oil, grease and gasoline resistance

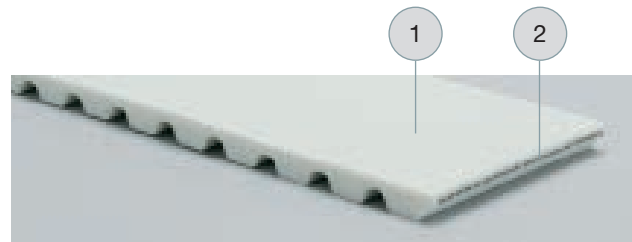

MECHANICAL AND CHEMICAL CHARACTERISTICS

- Constant dimensions
- Noiseless
- Free maintenance
- High flexibility
- High resistance steel traction cords, with little stretching and top flexibility
- Linear speeds up to 20 m/s
- Low pretension
- Constant length
- High abrasion resistance
- Ageing, Hydrolysis, Ozone resistant
- Working temperature -25 °C / +80 °C
- High resistance to Oils, Greases and Gasoline
- Fairly Acid-proof and Alkali-proof

BODY

Megalinear belts are manufactured with white thermoplastic Polyurethane 92 ShA as standard. Special compounds (different hardnesses, special properties) are available on request. Special compound and cords have to be tested and homologated on the application. Megadyne is not responsible for wrong functioning of special products. Here under some PU characteristics:

- Water** No problem in normal or sea clean water, at room temperature. Over 60 °C there is a fast decrement of breaking strength.
- Acids** In acid diluted proportions, at room temperature, this PU is moderately attacked. In high concentration acid solutions, this PU has a very short lifespan. Over 50 °C, acids are always dangerous for Thermoplastic PU.
- Alkalis** In alkalis diluted proportions, at room temperature, this PU is moderately attacked. In high concentration alkaline solutions, this PU has a very short lifespan. Over 50 °C, alkalis are always dangerous for Thermoplastic PU.
- Solvents** Thermoplastic PU is insoluble in the greater part of solvents. Only the very polar solvents (same as tetrahydrofuran, dimethylformamide, n-methylpyrrolidone) can dissolve or tight damage PU. The Esters or the Ketons (same as ethyl acetate or methylethylketene) can usually produce a bulge, decreasing mechanical characteristics. The Hydrocarbons aromatic and the Hydrocarbons aliphatic produce very high bulge. All the effects increase by increasing temperature.
- Oils** PU has a high resistance to mineral pure oils (lubrificants, engine oils, combustible oils). Usually, high performance syntetic oils, due to special additives contained, can be incompatible with Thermoplastic PU, especially at high temperature.

| | |
|-----------------------|---|
| Greases | PU has a high resistance to mineral pure greases (lubricants greases). Usually, high performance syntetic greases, due to special additives contained, can be incompatible with Thermoplastic PU, especially at high temperature. |
| Fuels | Good resistance to petrols without Alcohols. In presence of Alcohols, Thermoplastic PU can suffer deterioration. Fuels including Aromatiche stuffs can produce reversible bulges. |
| Microorganisms | In presence of grime, containing humidity, Microorganisms can develop. In case that Microbic attack can produce danger, you have to use a special kind of PU. |
| Weather agents | Good resistance to atmospheric agents. White colour can change to light yellow under long UV exposure. In any case this hasn't influence on mechanical resistance. |

CORDS

| | |
|------------------------|---|
| Standard cord | Megalinear is manufactured with S and Z parallel zinked steel cords as standard. |
| Kevlar | Kevlar tension cords are suggested for: <ul style="list-style-type: none"> • Non magnetic, for use in drives with metal detectors • Widely used in the food industry • Applications in damp evonronement must be avoided Kevlar cord belts have a lower dimentional stabiliy compared to stell cord belts. Length and tollerance may change. |
| HP | High Performance cords have 25% more strength capacity than standard cords. They are recommended for high repeatability applications. |
| HF | High Flexibility cords can accept smaller pulley and idler diameters than standard cords. They are suitable for multi-shaft drives with severe reverse bending. |
| HPF | High Performance and Flexibility cords have 25% more strength capacity like the HP cords, but they are more flexible than the HP cords. They are suggested for high performance and multi-shaft drives. |
| Stainless steel | Stainless steel cords have 25% less strength capacity than standard cords. They are recommended for water applications. |

COATING

Megalinear can be manufactured with special coating on the teeth or on the back. Please check on page 116 and 117.

IDENTIFICATION CODE


Using the information in the table below, it is possible to identify the correct belt for every application. The code is composed of letters and numbers as the following example::

| | | | | | | | | | | |
|----------|----------|-----------|----------|-----------|----------|-----------|----------|--------------|----------|-----------------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | | | | | |
| J | + | 50 | + | AT | + | 10 | + | 10000 | + | SPECIAL MANUFACTURES |


- 1) **J** joined belt.
- 2) **ML** Megalinear belt open-end.
- 3) **50** this number indicates the width of requested belt. The value is in mm for a belt with a pitch in mm, and in inches for a belt with a pitch in inches.
- 4) **AT** this code composed by letters indicates the selection of profile.
- 5) **10** this number indicates the standard pitch of the belt. It is expressed in mm.
- 6) **10000** the last number indicates the length of the belt always in mm regardless of pitch.
- 6) **SPECIAL MANUFACTURES:**
 - special cords as Kevlar or HP or HF or HPF or stainless steel
 - special compound as different hardness 85 ShA or different colours (black - red - yellow - blue)
 - extra coating NFT or NFB or AVAFC or Tenax or Linatex or Honey comb or PU black cellulose or PU yellow or Neoprene rubber.

TECHNICAL CALCULATION


LINEAR MOTION BELT

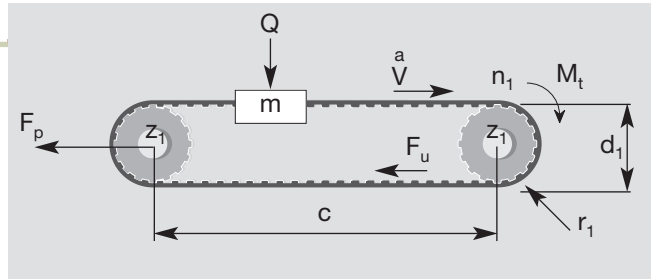

OMEGA LINEAR MOTION BELT

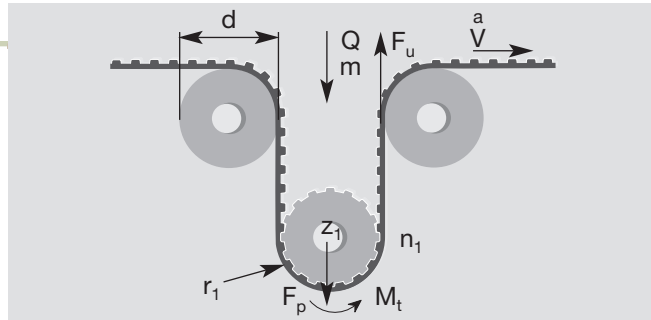

CONVEYOR BELT

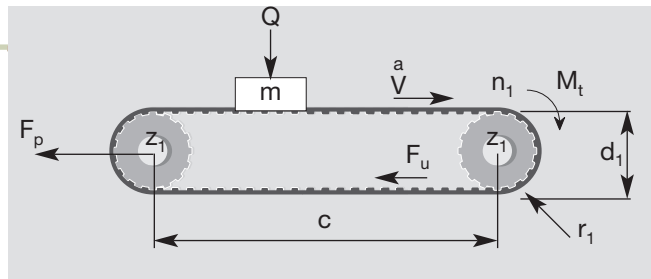

The following pages contain data, formulae and tables that are required to design a new belt drive. For critical and difficult drives, it is recommended that you contact our Application Department for advice.

| Symbol | Unit | Definition | Symbol | Unit | Definition |
|---------------------------|------------------|--|----------------------|------------------|---|
| a | m/s ² | acceleration | g | m/s ² | gravity (9,81) |
| b | mm | belt width | μ | – | friction coefficient |
| C | – | safety factor | m | Kg | conveyed mass |
| Δl/100 | % | elongation | M_t | Nm | drive torque |
| d | mm | idler pitch diameters | n₁ | 1/min | revs/min (RPM) of drive sprocket 1 |
| d₁ | mm | sprocket pitch diameter | P | KW | drive power |
| F_p | N | pretension | Q | N | force exerted by mass (m) |
| F_u | N | peripheral force | V | m/s | belt speed |
| F_{p spec} | N/cm | transmittable force per tooth per unit width | Z₁ | | number of teeth of sprocket |
| MTL | N | max traction load | Z_m | | number of teeth in mesh on driver sprocket (12) |
| BS | N | breaking strength | Z_L | | number of teeth of large pulley |
| c | mm | centre distance | Z_s | | number of teeth of small pulley |
| | | | p | | belt pitch |

Max traction load is maximum acceptable traction on cords.
 Breaking strength is necessary load to break belt cords.
 Elongation is belt elongation under load.

USEFUL FORMULAE AND CONVERSION FACTORS

$$V = \frac{d_1 \cdot n_1}{19100} \quad n_1 = \frac{V \cdot 19100}{d_1} \quad d_1 = \frac{V \cdot 19100}{n_1} \quad Q = m \cdot g$$

$$P = \frac{M_t \cdot n_1}{9550} \quad M_t = \frac{9550 \cdot P}{n_1} \quad M_t = \frac{F_u \cdot d_1}{2000}$$

CHOICE OF BELT PITCH AND SPROCKETS

For optimum belt pitch see tables on page 10.

For optimum choice of sprocket size, it is desirable to have as near to 12 teeth in mesh as possible.

| | | |
|----------------------|---|---|
| Knowing mass | → For horizontal & conveying drives | $F_u = (m \cdot a) + (m \cdot g \cdot \mu)$ |
| | (Note: values of μ can be found in table 1 on page 11). | |
| | → For vertical drives | $F_u = (m \cdot a) + (m \cdot g)$ |
| Knowing drive torque | | $F_u = 2000 M_t / d_1$ |
| Knowing drive power | | $F_u = 19.1 \cdot 10^6 \cdot P / (d_1 \cdot n_1)$ |

BELT WIDTH AND PROFILE ESTIMATION

The belt width b should be calculated using the following formula

$$b = (F_u \cdot c_s \cdot 10) / (F_{p \text{ spec}} \cdot Z_m)$$

C_s = safety factor from page 11 table 4
 F_u = from above calculation
 Z_m = number of teeth in mesh on driver sprocket
 $Z_m = [0,5 - \frac{4 \cdot p}{79 \cdot c} (Z_L - Z_s)] \cdot Z_s$
 = (if calculated $Z_m > 12$ for an open-end application use $Z_m = 12$)
 = (if calculated $Z_m > 6$ for a joined application use $Z_m = 6$)
 $F_{p \text{ spec}}$ = transmittable force per tooth per unit width (see table on belt data pages)

PRE-TENSIONING

The suggested installation tension:

$F_p = 2 \cdot F_u$ for linear and omega linear movement applications
 $F_p = F_u$ for conveyor applications

CORD CHECK

The maximum allowable tensile load of the belt pitch/width combination selected (see tables on belt data pages):

$$\text{max traction load of choosen belt} > \frac{F_p}{2} + (F_u \cdot C_s)$$

SPROCKET AND IDLER DIAMETER CHECK

Ensure that all selected pulley and idler diameters are equal to or greater than the minimum values specified in corresponding belt data page.

ELONGATION


When the belt is operating there will be an elongation proportional to max traction load:

$$\Delta l / l_0 = (F_u \cdot 4) / \text{max traction load}$$

LINEAR MOTION CALCULATION EXAMPLE (OPEN-END BELT)

MACHINE DATA

$C = 2.000 \text{ mm}$
 $d_1 = 76 \text{ mm}$
 $n_1 = 300 \text{ RPM}$
 $P = 1,8 \text{ KW}$
 low fluctuating load

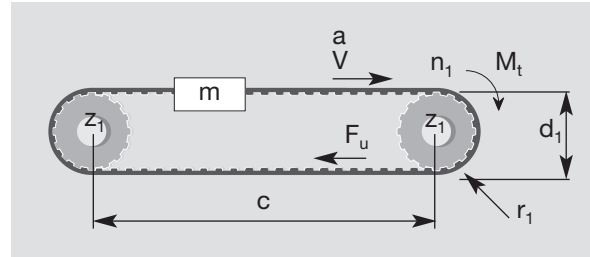

CHOICE OF BELT PITCH AND SPROCKETS

According to the belt pitch selection table n.1 on page 10 considering the values of P and n_1 , we select RPP8 belt. Then we consider the pulley diameter nearest to the requested value and the corresponding n . of teeth (see technical information on page 63). Therefore $Z_1 = 30$ teeth (with a pitch diameter of 76,4 mm).

CALCULATION OF THE EFFECTIVE TENSION

Since the drive power is known, F_u can be calculated

$$F_u = \frac{19,1 \cdot 10^6 \cdot P}{d_1 \cdot n_1} = \frac{19,1 \cdot 10^6 \cdot 1,8}{76,4 \cdot 300} = 1500 \text{ N}$$

DETERMINATION OF THE BELT WIDTH

$$b = \frac{F_u \cdot C_s \cdot 10}{F_{p \text{ spec}} \cdot Z_m}$$

$$b = \frac{1500 \cdot 1,4 \cdot 10}{62 \cdot 12} = 28,2 \text{ mm}$$

F_u = from before (1500 N)
 C_s = from page 11 table 4, for low fluctuating load $C_s = 1,4$
 Z_m = given that driver pulley has 30 teeth and n . of teeth in mesh = 15 but max Z_m is 12, then $Z_m = 12$
 n_1 = 300 RPM (given)
 $F_{p \text{ spec}}$ = 62N / cm (refer page 62 at 300 RPM)

Since the next closest width is 30 mm: 30 RPP8 is chosen.

PRE-TENSIONING

$$F_p = 2 \cdot F_u \quad F_p = 3000 \text{ N}$$

CORD CHECK

From page 62, RPP8 pitch 30 mm wide: max traction load 4750 N

$$\text{max traction load} > \frac{F_p}{2} + (F_u \cdot C_s) \quad \frac{F_p}{2} + (F_u \cdot C_s) = 1500 + 1500 \cdot 1,4$$

4750 N > 3600 N selected belt is acceptable.

SPROCKET AND IDLER DIAMETER CHECK

Ensure that all selected pulley and idler diameters are greater than or equal the minimum values specified on page 63.

ELONGATION


$$\Delta l_{/00} = \frac{F_u \cdot 4}{\text{max traction load}} = \frac{1500 \cdot 4}{4750} = 1,26 \text{ mm/m}$$

In the dynamic situations you will have an elongation of 1,26 mm per meter of operating belt.

CONVEYOR BELT CALCULATION EXAMPLE (JOINED BELT)

MACHINE DATA

$C = 5.000 \text{ mm}$
 $d_1 = 100 \text{ mm}$
 $V = 0,5 \text{ m/s}$
 $a = 0,5 \text{ m/s}^2$
 Guide in nylon
 $Q = 4500 \text{ N}$
 low fluctuating load

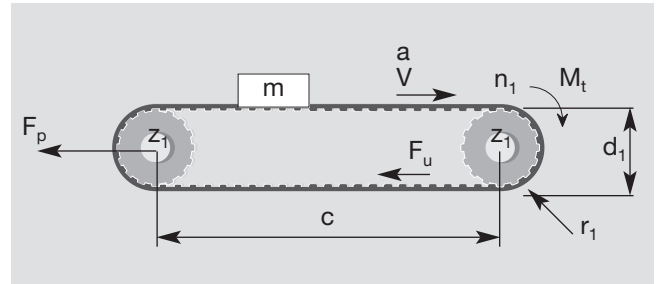

CALCULATION OF THE EFFECTIVE TENSION

Since the mass is known, F_u can be calculated $F_u = (m \cdot a) + (m \cdot g \cdot \mu)$ value of μ according to table 3 on page 11 = 0,35
 $F_u = (460 \cdot 0,5) + (460 \cdot 9,81 \cdot 0,35) = 1810 \text{ N}$
 $m = Q/g = 4500 / 9,81 = 460 \text{ kg}$

CHOICE OF BELT PITCH AND SPROCKETS

According to the belt selection table n. 2 on page 10, considering the values of F_u (for joined belts enter double of calculated F_u in table 2), we select T 10. Then we consider the pulley diameter nearest to the requested value and the corresponding n. of teeth (see technical information page 35). Therefore $Z_1 = 32$ teeth (with a pitch diameter of 101,86 mm).

DETERMINATION OF THE BELT WIDTH

| | |
|---|---|
| $b = \frac{F_u \cdot C_s \cdot 10}{F_{p \text{ spec}} \cdot Z_m}$ $b = \frac{1810 \cdot 1,4 \cdot 10}{45 \cdot 6} = 93,85 \text{ mm}$ | F_u = from before (1810 N) C_s = from page 11 table 4, for low fluctuating load $C_s = 1,4$ Z_m = given that driver pulley has 32 teeth and n. of teeth in mesh = 16 but max Z_m for joined belt is 6, hence, $Z_m = 6$ $n_1 = (Vp \cdot 60.000) / (\pi \cdot d_1) = (0,5 \cdot 60.000) / (\pi \cdot 101,86)$ as $d_1 = 101,86$ from before = 94 RPM $F_{p \text{ spec}} = 45 \text{ N / cm}$ (refer page 34, at 100 RPM) |
|---|---|

Since the next closest width is 100 mm: 100 T10 is chosen.

PRE-TENSIONING

$$F_p = F_u \text{ so } F_p = 1810 \text{ N}$$

CORD CHECK

From page 34, T10 pitch 100 mm wide joined: max traction load 5415 N

$$\text{max traction load} > F_p + (F_u \cdot C_s) \quad F_p + (F_u \cdot C_s) = 1810 + (1810 \cdot 1,4)$$

5415 N > 4344 N selected belt is acceptable.

SPROCKET AND IDLER DIAMETER CHECK

Checking technical data on page 35 for pulley and idlers, it can be seen that the drive has acceptable pulley diameters.

ELONGATION

$$\Delta l / l_0 = \frac{F_u \cdot 4}{\text{max traction load}} = \frac{1810 \cdot 4}{5415} = 1,33 \text{ mm/m}$$

In the dynamic situations you will have an elongation of 1,33 mm per meter of operating belt.

CALCULATION PARAMETERS

BELT PITCH SELECTION

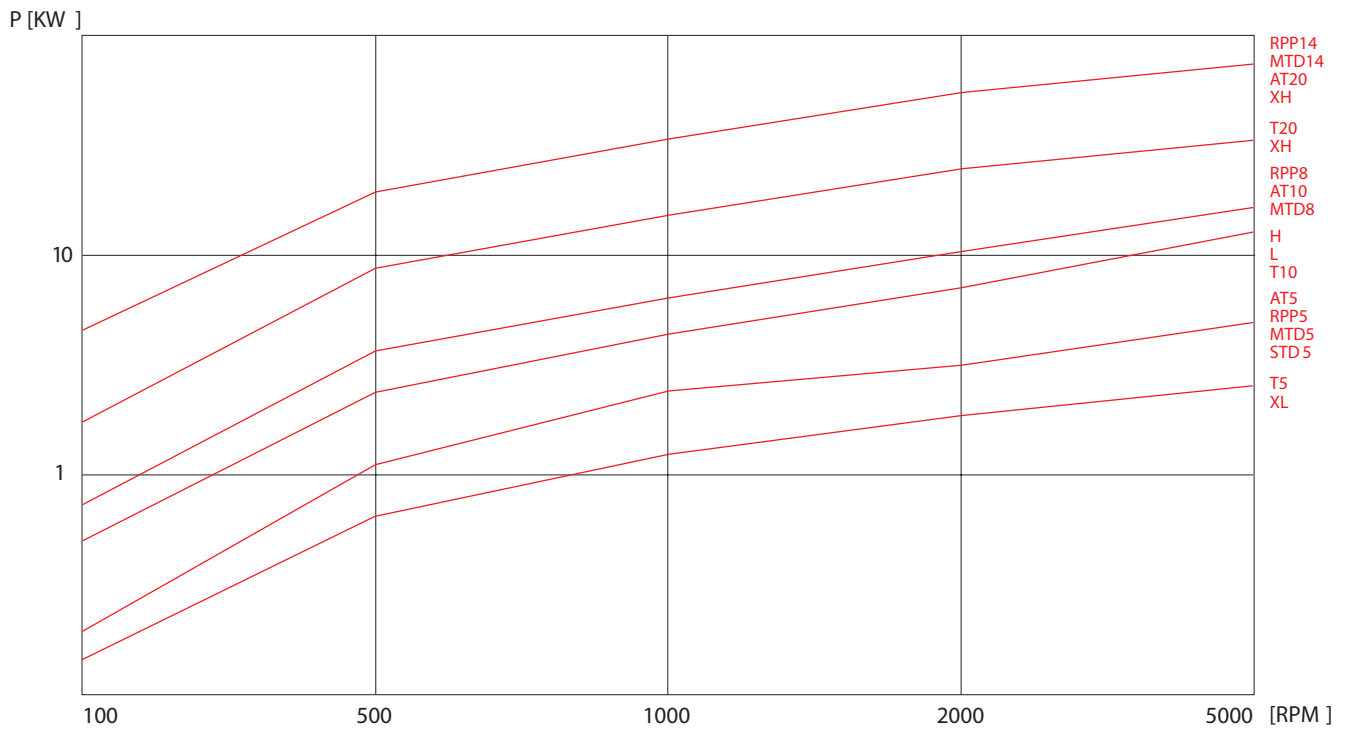


Table n. 1

BELT WIDTH SELECTION

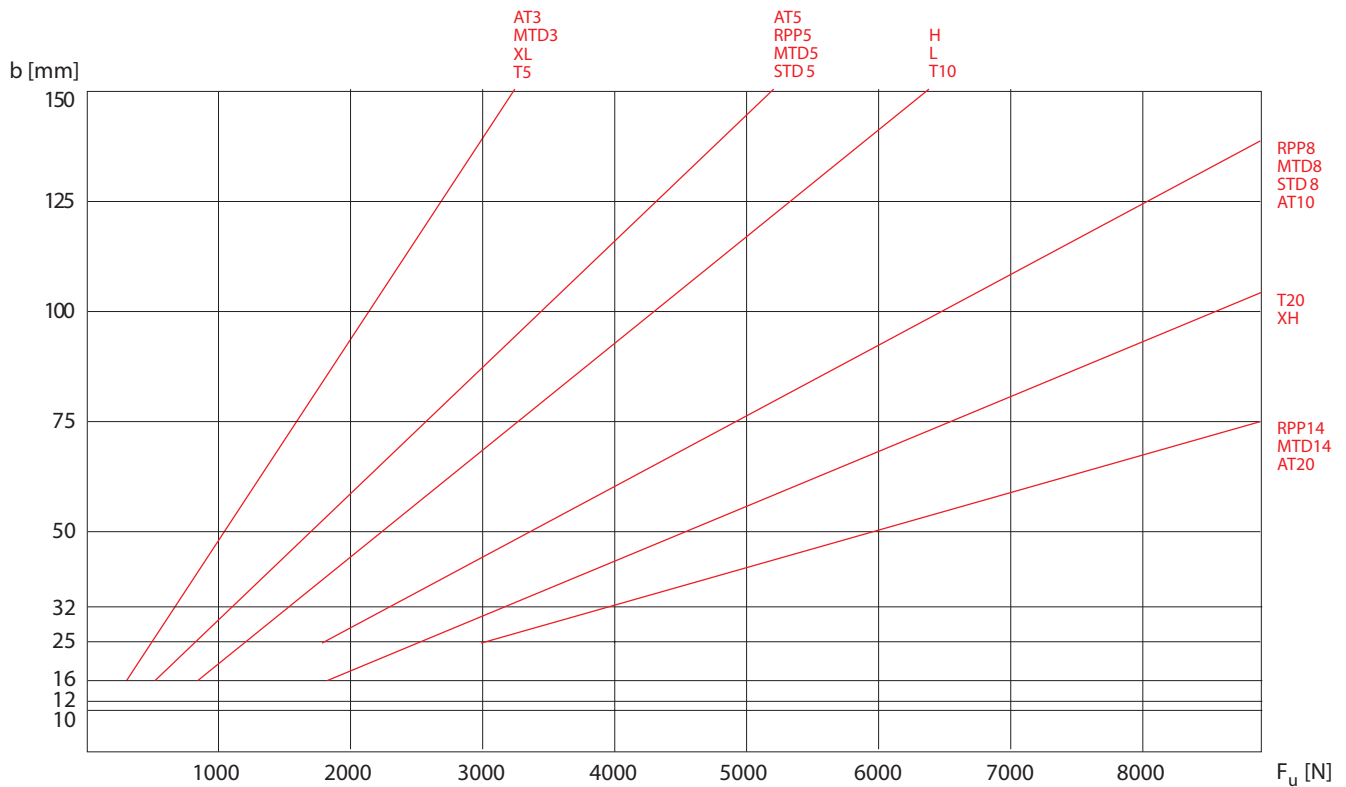


Table n. 2

Average values valid for standard steel cord. After belt selection, please check belt resistance on belt data page.

Table n. 3 - Friction coefficient

| Sliding friction on dry surface | |
|--|---------------------|
| Polyurethane / smooth steel | $\mu = 0,5$ |
| Polyurethane / rough steel | $\mu = 0,7$ |
| Polyurethane / abrasive steel | $\mu = 0,9$ |
| Polyurethane NFT / smooth steel | $\mu = 0,25$ |
| Polyurethane NFT / rough steel | $\mu = 0,35$ |
| Polyurethane NFT / abrasive steel | $\mu = 0,6$ |
| Polyurethane / nylon | $\mu = 0,35$ |
| Polyurethane NFT / nylon | $\mu = 0,15$ |
| Polyurethane / aluminium | $\mu = 0,8$ |
| Polyurethane NFT / aluminium | $\mu = 0,45$ |
| Rolling friction on dry surface | |
| Bearing | $\mu = 0,015$ |
| Roller / PU Belt | $\mu = 0,03 / 0,06$ |
| Bush | $\mu = 0,15$ |

Table n. 4 - Safety factor


The choice of the Safety factor's, depends on the operating conditions.
The following table shows the value to be used:

| | | |
|---|---------|-----|
| Steady Load | | 1 |
| Shock Load | Low | 1,4 |
| | Average | 1,7 |
| | High | 2 |
| Elevators, hoists | | 1,8 |
| Line shafts | | 1,6 |
| Paper machines: | | |
| agitators, calenders, driers, winding frames, | | 1,6 |
| willows, Jordan machines, pumps, slicers, grinders | | 1,8 |
| Machines for pottery and earthenware: | | |
| cutters, granulators, | | 1,7 |
| pulping machines | | 2,0 |
| Laundry machines: general | | 1,6 |
| extractors, washers | | 1,8 |
| Machines for rubber processing | | 1,8 |
| Woodworking machines: | | |
| lathes, band saws, cutters, | | 1,7 |
| circular saws, planers, jointer | | 1,7 |
| Printing machinery: | | |
| rotary, newspaper, linotype, cutters, folders, magazine | | 1,6 |
| Textile machines: | | |
| warping machines, winders, | | 1,7 |
| spinners, twisting frames, looms | | 1,8 |
| Machines tools: drilling machines, lathes, | | |
| tread cutting machines, gears cutters, boring machines | | 1,6 |
| millers, planers, | | 1,7 |
| grinding machines | | 1,7 |
| Conveyors: | | |
| hoists, light package | | 1,3 |
| oven screw fleight | | 1,8 |
| apron bucket, elevator | | 1,8 |
| screw | | 1,8 |
| Brick machinery | | 1,8 |

BELT INSTALLATION


A major difficulty installing transmission belt is to achieve correct belt tension. Lifetime of support bearings and transmission belts and therefore reliability of the complete system largely depends on an optimally adjusted belt tension. Pretension is the force needed to put tension into the system to avoid the belt jumping on the pulleys as in the example below:

Not correct belt installation

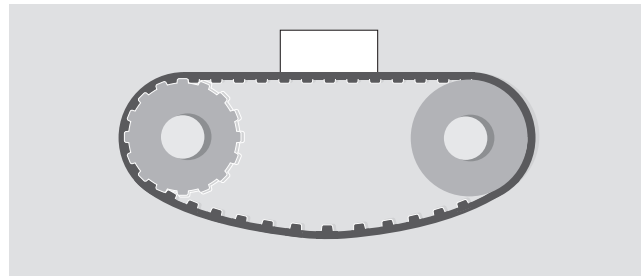


For a correct system installation, all applications with Megalinear belt can be summarised according following two sketches:

1) Linear and omega linear motion belt

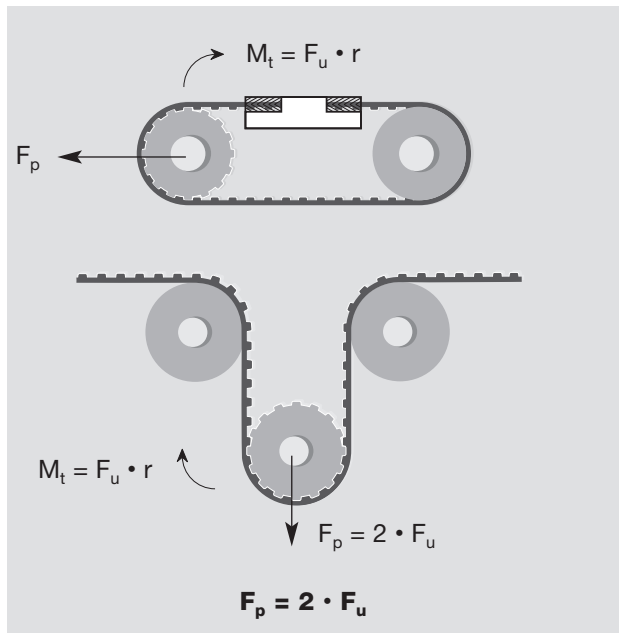

2) Conveyor belt

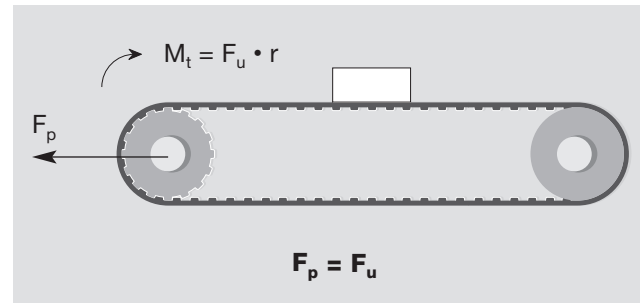

F_p = pretension
 F_u = peripheral force (see calculation pag. 8/9)
 r = pulley radius

PROCEDURE TO MEASURE

The procedure to measure the tension of the belt is to use a Belt Tension Gauging Equipment. This device consists of a small sensing head which is held across the belt to be measured. The belt is then tapped to induce the belt to vibrate at its natural frequency. The vibrations are detected and the frequency of vibration is then displayed on the measuring unit. The relation between belt static tension (T_s) and frequency of vibration (f) may be calculated using the following formula:



$$f = \frac{1}{2t} \cdot \sqrt{\frac{T_s}{m}} \quad \text{or} \quad T_s = 4 \cdot m \cdot t^2 \cdot f^2$$

Where :

T_s = static tension (N)

f = Frequency of vibration in Hertz (Hz)

m = Belt mass per unit length (kg/m)


t = Free belt span length in meters (m)

BELT INSTALLATION

For a correct system functioning and to increase belt life, it is necessary a correct pulley installation: pulleys has to be parallel and aligned as shown in drawing 1 (correct configuration).


If pulleys are not parallel as in drawing 2, belt could fall during functioning and this can provoke damages to complete equipment.

To grant a correct belt running, α and Δx must be as smaller as possible. For more information, please contact our technical staff.

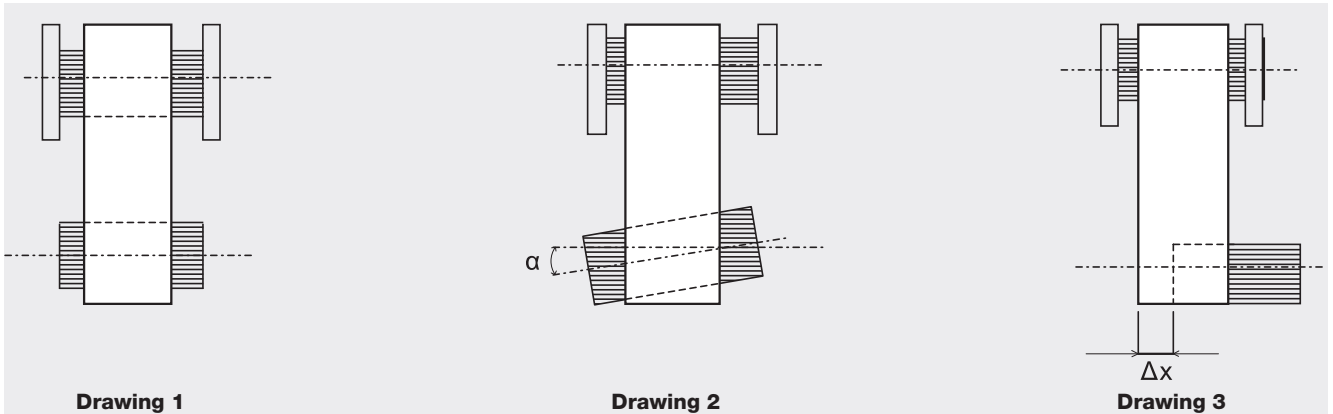


In omega application to grant good mesh between pulley and teeth and to respect belt flexibility avoiding excessive stress on cords, distance d (as drawing 4) has to be:

$d = 4 \cdot \text{belt width}$
Suggested angle 120°

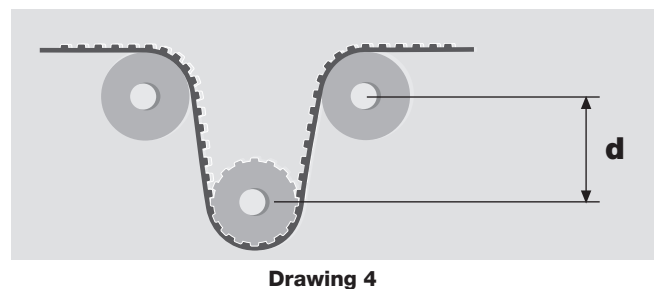

Moreover for a good drive work, it is suggested to check belt straightness as follows:

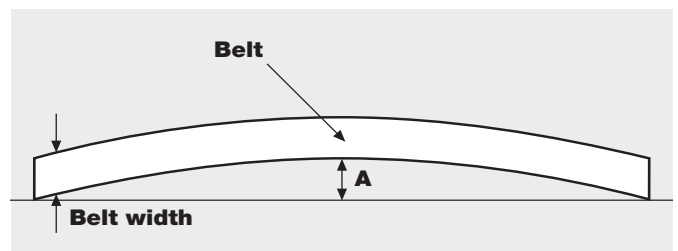

| Belt width | Testing belt length | Maximum suggested bending (A) |
|---------------|---------------------|-------------------------------|
| Till to 20 mm | 1 m | 3 mm |
| Over 20 mm | 2 m | 4 mm |

MEGALINEAR MXL OPEN-END

BELT CHARACTERISTICS

| | | | |
|-------------------------------|--------------|-------------|-------------|
| STANDARD WIDTHS (inch) | 017 | 037 | 050 |
| STANDARD WIDTHS (mm) | 4,318 | 9,53 | 12,7 |
| Weight (gr/m) | 8 | 16 | 24 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion kevlar cords**


Standard width tolerance: **+/- 0,38 mm**

Standard thickness: **1,14 +/- 0,13 mm**


Standard length tolerance: **+/- 0,8 mm/m**

Standard roll length: **100 m**

Belt options on request with minimum quantity:
Antistatic compound

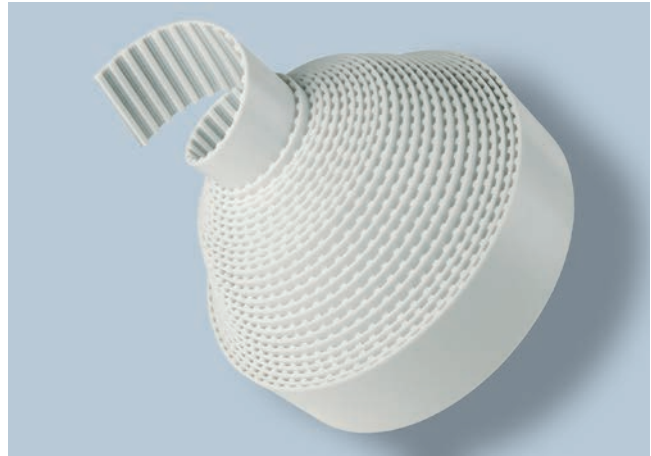

TOOTH PROFILE ACCORDING ISO 5296-1

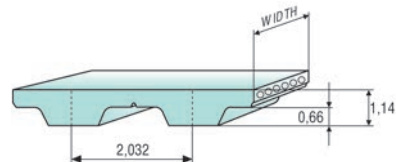

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | |
|----------------------------|------------|----------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|----------|------------|-------------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 |
| F _{p spec} (N/cm) | 7,3 | 7 | 6,8 | 6,7 | 6,6 | 6,4 | 5,9 | 5,7 | 5,4 | 5,2 | 4,9 | 4,6 | 4,2 | 4 | 3,6 | 3,25 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| | | | | |
|--------|--------------------------|------------|------------|------------|
| | Belt width (inch) | 017 | 037 | 050 |
| Kevlar | Max Traction Load (N) | 210 | 420 | 630 |
| | Breaking Strength (N) | 850 | 1700 | 2550 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 |


Average values

FLEXION RESISTANCE

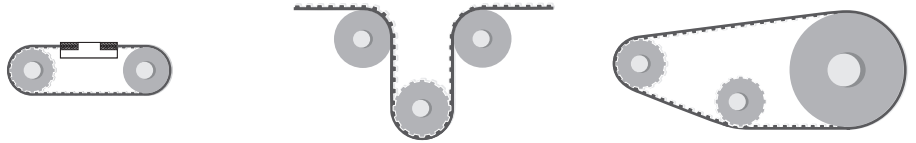

| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|--------------|-----------|-----------|--------------------|-----------|--------------------|
| Kevlar cords | 12 | 15 | 30 | 12 | 20 |

PULLEYS (for more details please see our pulleys catalogue)

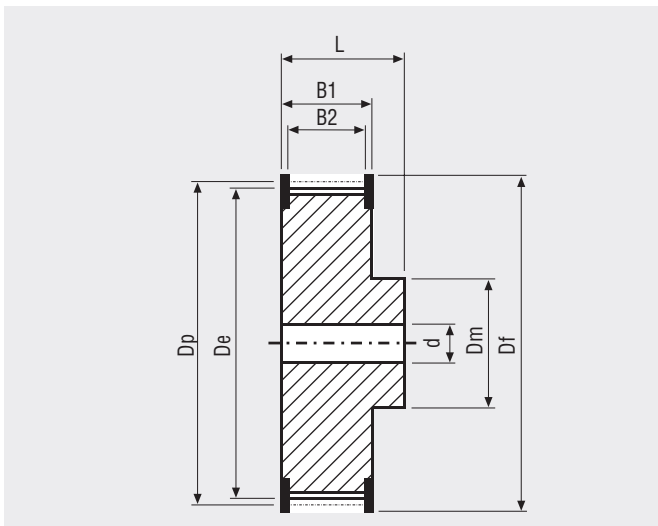

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 10 | 6,47 | 5,96 | 26 | 16,81 | 16,30 |
| 12 | 7,76 | 7,25 | 28 | 18,11 | 17,60 |
| 13 | 8,41 | 7,90 | 30 | 19,40 | 18,89 |
| 14 | 9,06 | 8,55 | 32 | 20,70 | 20,19 |
| 15 | 9,70 | 9,19 | 34 | 21,99 | 21,48 |
| 16 | 10,35 | 9,84 | 36 | 23,29 | 22,78 |
| 17 | 11,00 | 10,49 | 40 | 25,87 | 25,36 |
| 18 | 11,64 | 11,13 | 42 | 27,17 | 26,66 |
| 19 | 12,29 | 11,78 | 44 | 28,46 | 27,95 |
| 20 | 12,94 | 12,43 | 48 | 31,05 | 30,54 |
| 21 | 13,58 | 13,07 | 60 | 38,81 | 38,30 |
| 22 | 14,23 | 13,72 | 65 | 42,04 | 41,53 |
| 24 | 15,52 | 15,01 | 72 | 46,57 | 46,06 |

MEGALINEAR XL OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (inch) | 025 | 037 | 050 | 075 | 100 | 150 | 200 |
|------------------------|------|------|------|-------|------|------|------|
| STANDARD WIDTHS (mm) | 6,35 | 9,53 | 12,7 | 19,05 | 25,4 | 38,1 | 50,8 |
| Weight (gr/m) | 15 | 20 | 30 | 45 | 60 | 90 | 120 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**



Standard thickness: **2,3 +/- 0,3 mm**

Standard length tolerance: **+/- 0,8 mm/m**

Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Antistatic nylon fabric
- Transparent FDA compound
- AVAFC 60/70/85 ShA
- APL
- Cleats

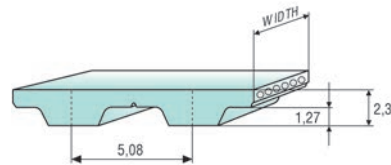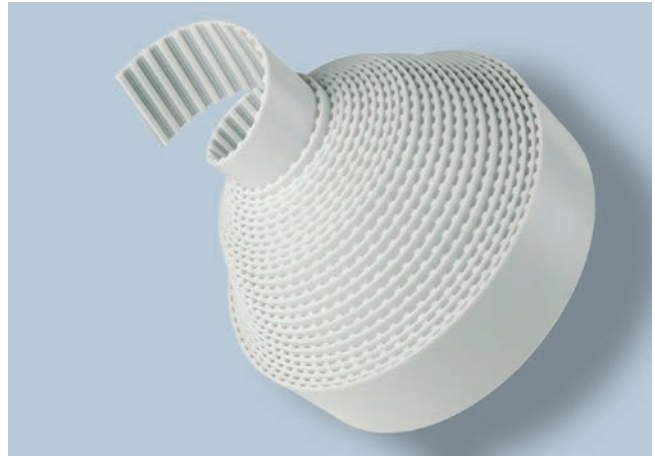

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 5296-1

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| F _{p spec} (N/cm) | 19 | 19 | 18 | 18 | 17 | 17 | 16 | 15 | 15 | 14 | 13 | 13 | 12 | 11 | 10 | 9 | 8 | 7 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (inch) | | 025 | 037 | 050 | 075 | 100 | 150 | 200 |
|-------------------|--------------------------|-----|------|------|------|------|------|------|
| Steel | Max Traction Load (N) | 155 | 250 | 375 | 625 | 840 | 1310 | 1750 |
| | Breaking Strength (N) | 625 | 1000 | 1500 | 2500 | 3375 | 5250 | 7000 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 210 | 335 | 505 | 845 | 1140 | 1775 | 2365 |
| | Breaking Strength (N) | 845 | 1350 | 2025 | 3380 | 4565 | 7100 | 9465 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 85 | 140 | 210 | 355 | 480 | - | - |
| | Breaking Strength (N) | 355 | 570 | 855 | 1425 | 1920 | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | 3,8 | - | - |

Average values

FLEXION RESISTANCE

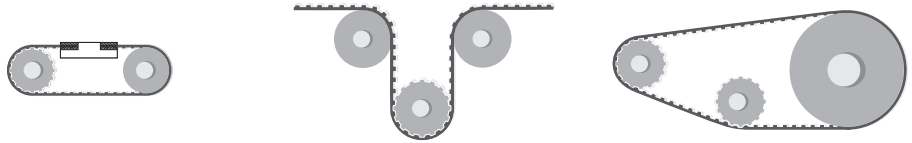


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 10 | 15 | 30 | 10 | 30 |
| Kevlar cords | 10 | 15 | 30 | 10 | 20 |
| Stainless steel cords | 13 | 15 | 35 | 13 | 35 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 1116



PULLEYS (for more details please see our pulleys catalogue)

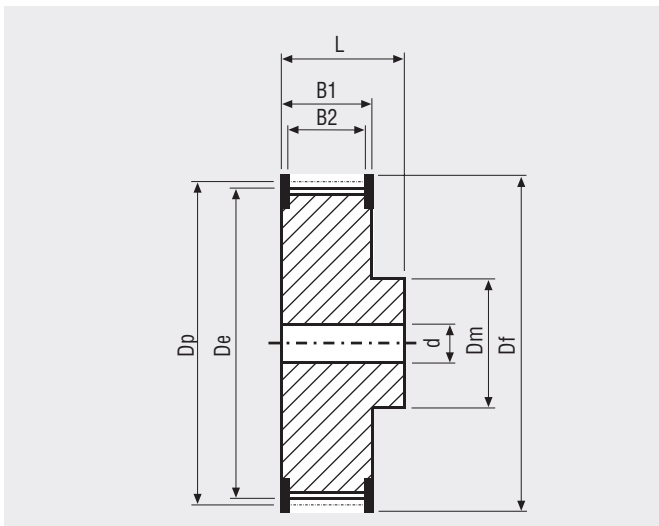


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 10 | 16,17 | 15,66 | 26 | 42,04 | 41,53 |
| 11 | 17,79 | 17,28 | 27 | 43,67 | 43,16 |
| 12 | 19,40 | 18,89 | 28 | 45,28 | 44,77 |
| 13 | 21,02 | 20,51 | 29 | 46,89 | 46,38 |
| 14 | 22,64 | 22,13 | 30 | 48,51 | 48,00 |
| 15 | 24,26 | 23,75 | 32 | 51,74 | 51,23 |
| 16 | 25,87 | 25,36 | 34 | 54,98 | 54,47 |
| 17 | 27,49 | 26,98 | 35 | 56,60 | 56,09 |
| 18 | 29,11 | 28,60 | 36 | 58,21 | 57,70 |
| 19 | 30,72 | 30,21 | 38 | 61,45 | 60,94 |
| 20 | 32,34 | 31,83 | 39 | 63,06 | 62,55 |
| 21 | 33,96 | 33,45 | 40 | 64,68 | 64,17 |
| 22 | 35,57 | 35,07 | 42 | 67,91 | 67,40 |
| 24 | 38,81 | 38,30 | 44 | 71,15 | 70,64 |

MEGALINEAR L OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (inch) | 037 | 050 | 075 | 100 | 150 | 200 | 400 |
|------------------------|------|------|-------|------|------|------|-------|
| STANDARD WIDTHS (mm) | 9,53 | 12,7 | 19,05 | 25,4 | 38,1 | 50,8 | 101,6 |
| Weight (gr/m) | 35 | 45 | 65 | 90 | 135 | 180 | 325 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **3,6 +/- 0,3 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Cleats

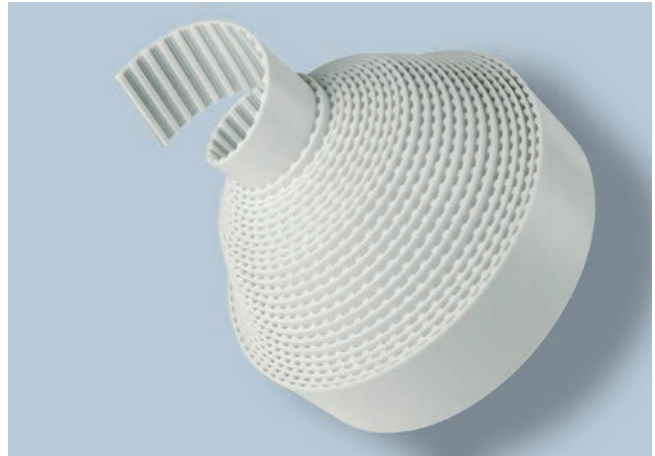

Different back coating materials see page 116

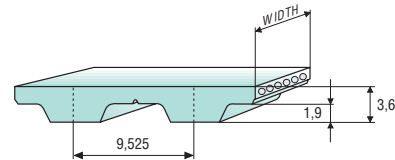

TOOTH PROFILE ACCORDING ISO 5296-1

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 37 | 36 | 35 | 35 | 34 | 33 | 31 | 29 | 28 | 27 | 24 | 23 | 20 | 19 | 16 | 15 | 13 | 11 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (inch) | | 037 | 050 | 075 | 100 | 150 | 200 | 400 |
|-------------------|--------------------------|------|------|------|------|-------|-------|-------|
| Steel | Max Traction Load (N) | 600 | 800 | 1340 | 1805 | 2810 | 3750 | 7500 |
| | Breaking Strength (N) | 2410 | 3215 | 5360 | 7235 | 11255 | 15005 | 26260 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 595 | 795 | 1330 | 1795 | 2790 | 3720 | 7445 |
| | Breaking Strength (N) | 2390 | 3190 | 5320 | 7180 | 11170 | 14895 | 26065 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 470 | 625 | 1045 | 1410 | - | - | - |
| | Breaking Strength (N) | 1880 | 2505 | 4180 | 5640 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - |

Average values

FLEXION RESISTANCE

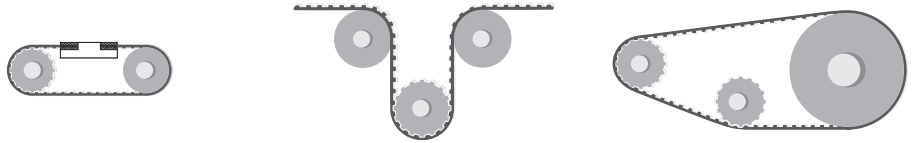


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 20 | 60 | 15 | 60 |
| Kevlar cords | 15 | 20 | 60 | 15 | 60 |
| Stainless steel cords | 18 | 20 | 65 | 18 | 65 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

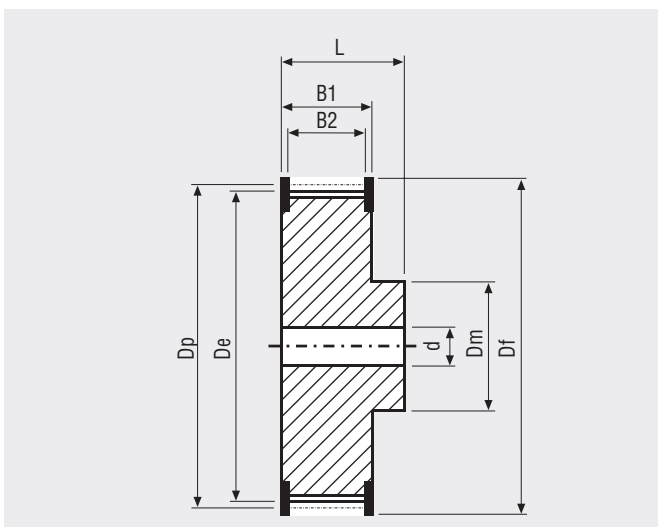


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 15 | 45,48 | 44,72 | 27 | 81,86 | 81,10 |
| 16 | 48,51 | 47,75 | 28 | 84,89 | 84,13 |
| 17 | 51,54 | 50,78 | 29 | 87,93 | 87,17 |
| 18 | 54,57 | 53,81 | 30 | 90,96 | 90,20 |
| 19 | 57,61 | 56,85 | 32 | 97,02 | 96,26 |
| 20 | 60,64 | 59,88 | 34 | 103,08 | 102,32 |
| 21 | 63,67 | 62,91 | 36 | 109,15 | 108,39 |
| 22 | 66,70 | 65,94 | 40 | 121,28 | 120,52 |
| 23 | 69,73 | 68,97 | 44 | 133,40 | 132,64 |
| 24 | 72,77 | 72,01 | 48 | 145,53 | 144,76 |
| 25 | 75,80 | 75,04 | 56 | 169,79 | 169,03 |
| 26 | 78,83 | 78,07 | | | |

MEGALINEAR H OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (inch) | 050 | 075 | 100 | 150 | 200 | 300 | 400 | 600 |
|------------------------|------|-------|------|------|------|------|-------|-------|
| STANDARD WIDTHS (mm) | 12,7 | 19,05 | 25,4 | 38,1 | 50,8 | 76,2 | 101,6 | 152,4 |
| Weight (gr/m) | 55 | 80 | 110 | 160 | 215 | 325 | 430 | 645 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **4,3 +/- 0,3 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Cleats

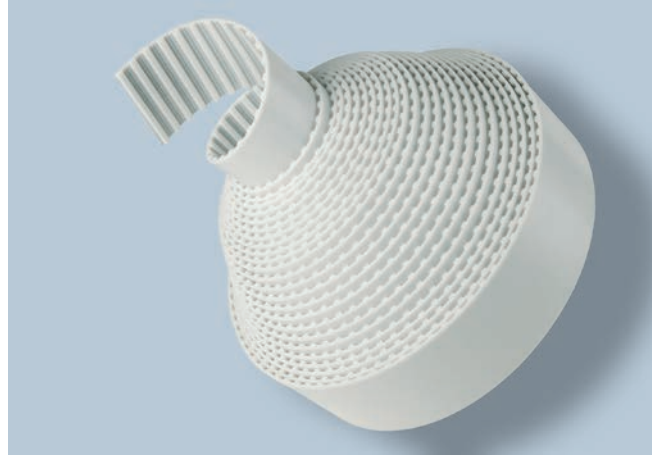

Different back coating materials see page 116

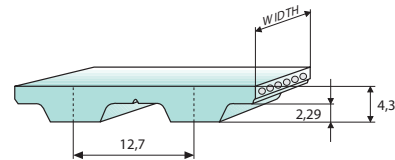

TOOTH PROFILE ACCORDING ISO 5296-1

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| F _{p spec} (N/cm) | 44 | 43 | 42 | 41 | 40 | 39 | 36 | 34 | 33 | 31 | 29 | 27 | 24 | 22 | 19 | 17 | 16 | 12 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (inch) | | 050 | 075 | 100 | 150 | 200 | 300 | 400 | 600 |
|-------------------|--------------------------|------|------|------|-------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 1050 | 1785 | 2415 | 3675 | 5040 | 8065 | 11760 | 12480 |
| | Breaking Strength (N) | 4200 | 7140 | 9660 | 14700 | 20160 | 30660 | 41160 | 43680 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 895 | 1535 | 2050 | 3205 | 4360 | 7020 | 10260 | 15240 |
| | Breaking Strength (N) | 3590 | 6155 | 8205 | 12825 | 17440 | 26675 | 35910 | 53350 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 805 | 1370 | 1855 | 2825 | 3875 | - | - | - |
| | Breaking Strength (N) | 3230 | 5490 | 7425 | 11305 | 15500 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - |

Average values

FLEXION RESISTANCE

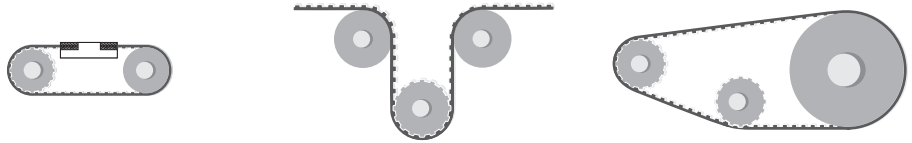


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 14 | 20 | 80 | 14 | 60 |
| Kevlar cords | 14 | 20 | 80 | 14 | 60 |
| Stainless steel cords | 18 | 20 | 80 | 18 | 65 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

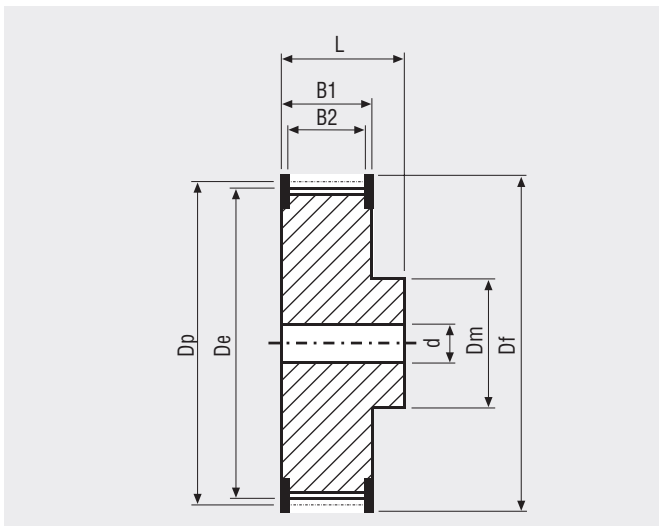

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 14 | 56,60 | 55,23 | 28 | 113,19 | 111,82 |
| 15 | 60,64 | 59,27 | 29 | 117,23 | 115,86 |
| 16 | 64,68 | 63,31 | 30 | 121,28 | 119,91 |
| 17 | 68,72 | 67,35 | 32 | 129,36 | 127,99 |
| 18 | 72,77 | 71,40 | 33 | 133,40 | 132,03 |
| 19 | 76,81 | 75,44 | 34 | 137,45 | 136,08 |
| 20 | 80,85 | 79,48 | 35 | 141,49 | 140,12 |
| 21 | 84,89 | 83,52 | 36 | 145,53 | 144,16 |
| 22 | 88,94 | 87,57 | 38 | 153,62 | 152,25 |
| 23 | 92,98 | 91,61 | 40 | 161,70 | 160,33 |
| 24 | 97,02 | 95,65 | 44 | 177,87 | 176,50 |
| 25 | 101,06 | 99,69 | 48 | 194,04 | 192,67 |
| 26 | 105,11 | 103,74 | 52 | 210,21 | 208,84 |
| 27 | 109,15 | 107,78 | 60 | 242,55 | 241,18 |

MEGALINEAR H WIDE OPEN-END

BELT CHARACTERISTICS

| | | | | | |
|-------------------------------|--------------|-------------|--------------|--------------|-------------|
| STANDARD WIDTHS (inch) | 800 | 1000 | 1200 | 1600 | 2000 |
| STANDARD WIDTHS (mm) | 203,2 | 254 | 304,8 | 406,4 | 508 |
| Weight (gr/m) | 410 | 510 | 615 | 820 | 1020 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion kevlar at pitch 3,2 mm**

Standard width tolerance: **+/- 0,2 mm**



Standard thickness: **4,3 +/- 0,3 mm**

Standard length tolerance: **+/- 0,8 mm/m**

Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Antistatic nylon fabric
- Transparent FDA compound

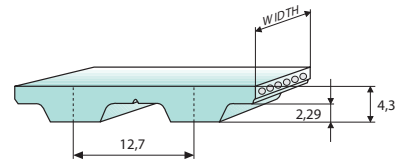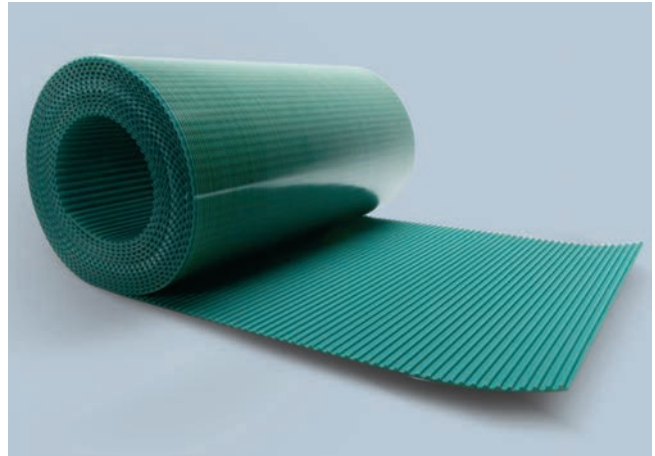

TOOTH PROFILE ACCORDING ISO 5296-1

TOOTH RESISTANCE


| | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 |
| F _{p spec} (N/cm) | 31 | 30 | 29 | 29 | 28 | 27 | 25 | 24 | 23 | 21 | 20 | 19 |

TRACTION RESISTANCE

| | | | | | | |
|--------|--------------------------|------------|-------------|-------------|-------------|-------------|
| | Belt width (inch) | 800 | 1000 | 1200 | 1600 | 2000 |
| Kevlar | Max Traction Load (N) | 8350 | 10260 | 12310 | 16415 | 20520 |
| | Breaking Strength (N) | 29240 | 35910 | 43090 | 57455 | 71820 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 |

Average values

FLEXION RESISTANCE

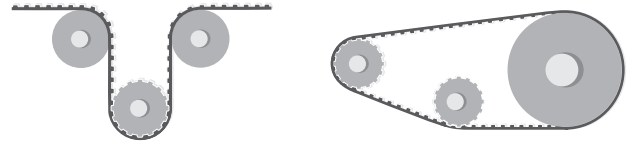


| | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|--------------|-----------|--------------------|-----------|--------------------|
| Kevlar cords | 20 | 80 | 14 | 60 |

JOINED BELT INFORMATIONS

- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table



PULLEYS (for more details please see our pulleys catalogue)

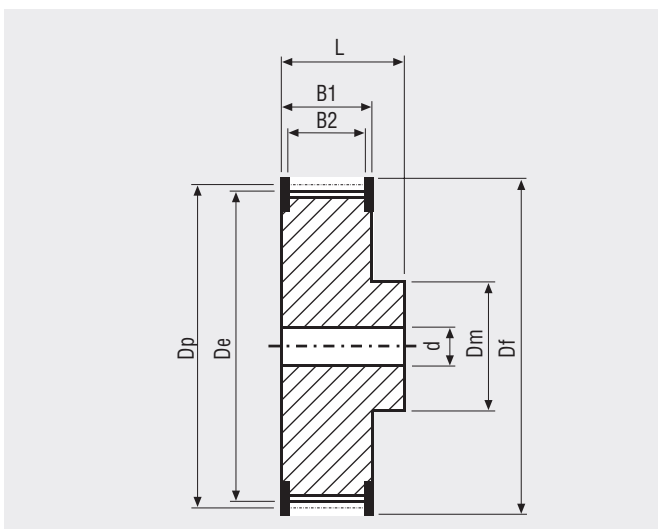



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 14 | 56,60 | 55,23 | 28 | 113,19 | 111,82 |
| 15 | 60,64 | 59,27 | 29 | 117,23 | 115,86 |
| 16 | 64,68 | 63,31 | 30 | 121,28 | 119,91 |
| 17 | 68,72 | 67,35 | 32 | 129,36 | 127,99 |
| 18 | 72,77 | 71,40 | 33 | 133,40 | 132,03 |
| 19 | 76,81 | 75,44 | 34 | 137,45 | 136,08 |
| 20 | 80,85 | 79,48 | 35 | 141,49 | 140,12 |
| 21 | 84,89 | 83,52 | 36 | 145,53 | 144,16 |
| 22 | 88,94 | 87,57 | 38 | 153,62 | 152,25 |
| 23 | 92,98 | 91,61 | 40 | 161,70 | 160,33 |
| 24 | 97,02 | 95,65 | 44 | 177,87 | 176,50 |
| 25 | 101,06 | 99,69 | 48 | 194,04 | 192,67 |
| 26 | 105,11 | 103,74 | 52 | 210,21 | 208,84 |
| 27 | 109,15 | 107,78 | 60 | 242,55 | 241,18 |

MEGALINEAR XH OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (inch) | 100 | 150 | 200 | 300 | 400 | 600 |
|------------------------|------|------|------|------|-------|-------|
| STANDARD WIDTHS (mm) | 25,4 | 38,1 | 50,8 | 76,2 | 101,6 | 152,4 |
| Weight (gr/m) | 250 | 400 | 530 | 795 | 1060 | 1625 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard thickness: **11,2 +/- 0,5 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

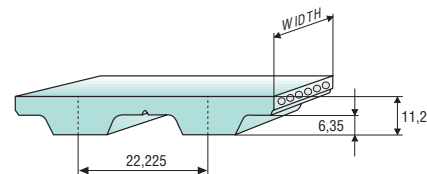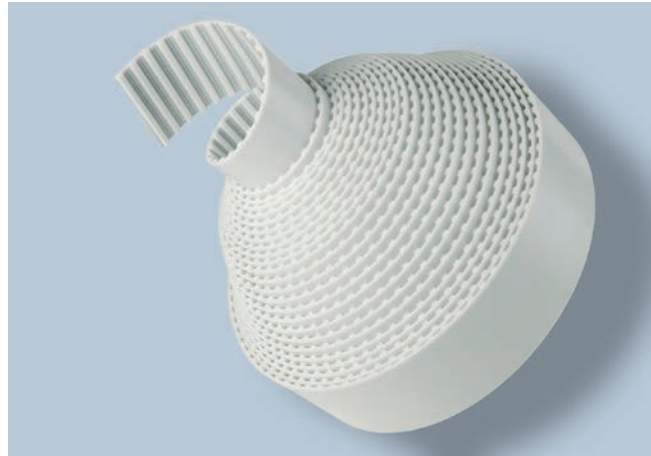

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 5296-1

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 |
|----------------------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 115 | 111 | 108 | 105 | 103 | 101 | 92 | 86 | 81 | 78 | 70 | 65 | 57 | 51 | 43 | 37 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (inch) | | 100 | 150 | 200 | 300 | 400 | 600 |
|-------------------|--------------------------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 3800 | 5935 | 8075 | 13000 | 19000 | 28225 |
| | Breaking Strength (N) | 15200 | 23750 | 32300 | 49400 | 66500 | 98800 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 4215 | 6675 | 9135 | 14800 | 21690 | 32940 |
| | Breaking Strength (N) | 16870 | 26710 | 36555 | 56240 | 75920 | 115290 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 2865 | 4480 | 6095 | - | - | - |
| | Breaking Strength (N) | 11475 | 17930 | 24385 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - | - | - |

Average values


FLEXION RESISTANCE

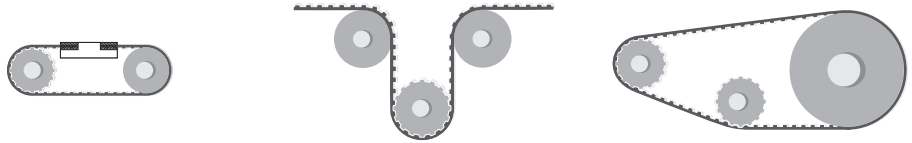


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 18 | 20 | 180 | 18 | 150 |
| Kevlar cords | 18 | 20 | 180 | 18 | 150 |
| Stainless steel cords | 23 | 25 | 180 | 23 | 165 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

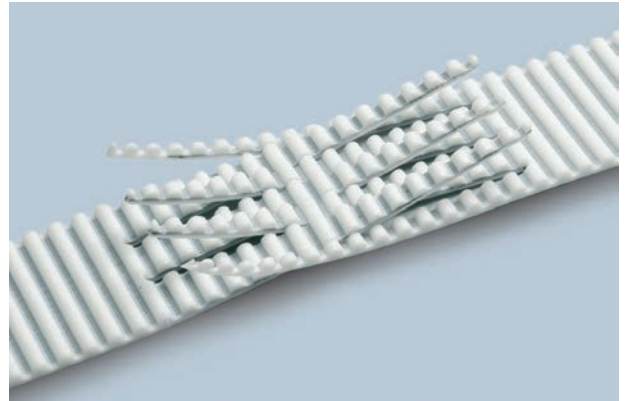

PULLEYS (for more details please see our pulleys catalogue)

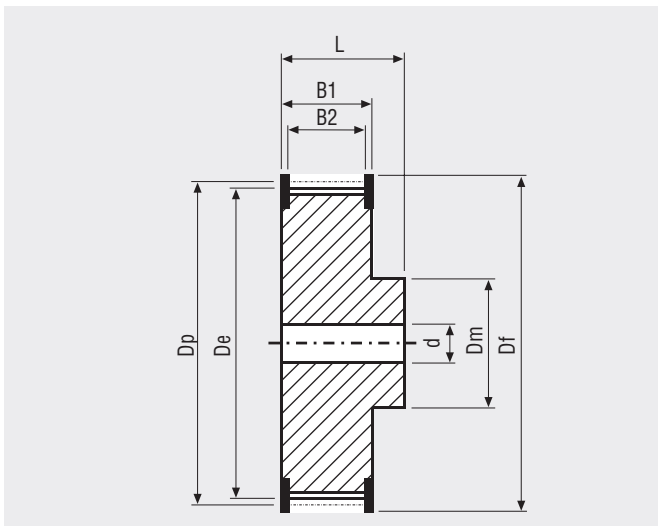


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 18 | 127,34 | 124,55 | 40 | 282,98 | 280,19 |
| 20 | 141,49 | 138,70 | 44 | 311,28 | 308,48 |
| 22 | 155,64 | 152,83 | 48 | 339,57 | 336,78 |
| 24 | 169,79 | 167,00 | 60 | 424,47 | 421,68 |
| 26 | 183,92 | 181,13 | 72 | 509,36 | 506,57 |
| 28 | 198,08 | 195,29 | 84 | 594,25 | 591,46 |
| 30 | 212,23 | 209,44 | 96 | 679,15 | 676,35 |
| 32 | 226,38 | 223,59 | 120 | 848,93 | 846,14 |

MEGALINEAR T2,5 OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 16 | 20 |
|----------------------|----|----|----|
| Weight (gr/m) | 14 | 23 | 28 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **one torsion zinked steel**
 Standard width tolerance: **+/- 0,3 mm**
 Standard thickness: **1,3 +/- 0,15 mm**
 Standard length tolerance: **+/- 0,8 mm/m**
 Standard roll length: **100 m**
 Belt options on request with minimum quantity:
 Antistatic compound

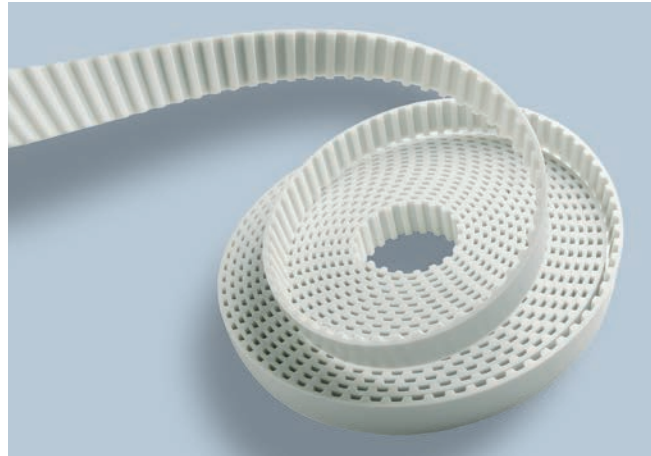

TOOTH PROFILE ACCORDING ISO 17396

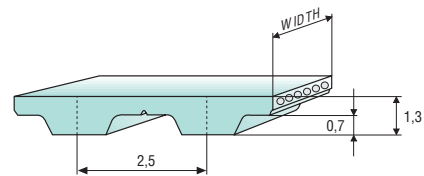

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 |
|----------------------------|----------|------------|------------|------------|------------|------------|------------|----------|------------|------------|----------|------------|------------|------------|------------|----------|
| F _{p spec} (N/cm) | 9 | 8,7 | 8,4 | 8,2 | 8,1 | 7,9 | 7,3 | 7 | 6,7 | 6,4 | 6 | 5,7 | 5,2 | 4,9 | 4,4 | 4 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 16 | 20 |
|-----------------|--------------------------|-----|-----|-----|
| Steel | Max Traction Load (N) | 105 | 170 | 215 |
| | Breaking Strength (N) | 435 | 695 | 870 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

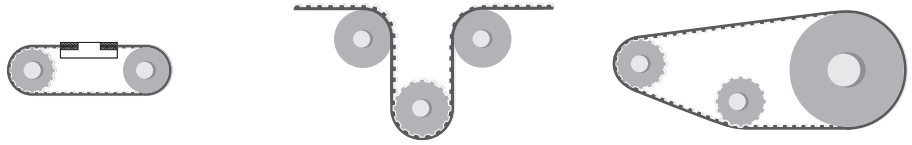


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|---------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cord | 10 | 18 | 15 | 10 | 18 |

JOINED BELT INFORMATIONS

- Minimum splice length 500 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Minimum diameters according above table

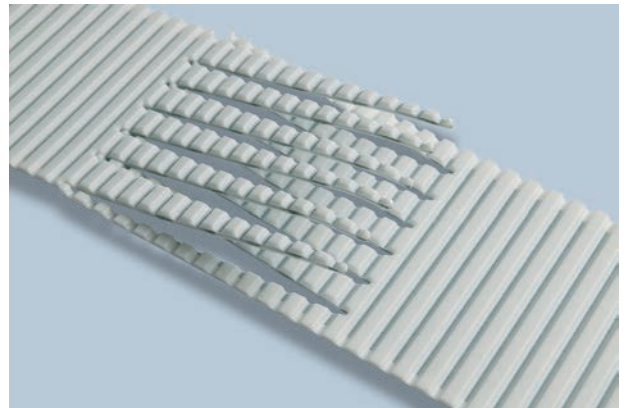

PULLEYS (for more details please see our pulleys catalogue)

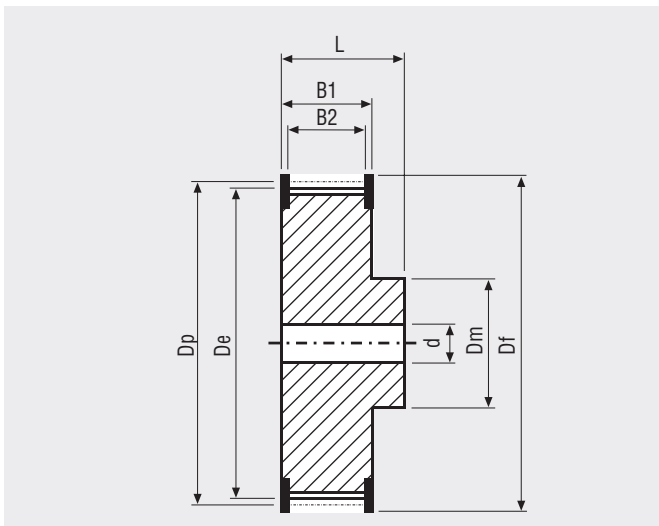



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 10 | 7,96 | 7,45 | 22 | 17,51 | 17,00 |
| 11 | 8,75 | 8,25 | 24 | 19,10 | 18,55 |
| 12 | 9,55 | 9,00 | 26 | 20,69 | 20,15 |
| 13 | 10,34 | 9,80 | 28 | 22,28 | 21,75 |
| 14 | 11,14 | 10,60 | 30 | 23,87 | 23,35 |
| 15 | 11,94 | 11,40 | 32 | 25,46 | 24,95 |
| 16 | 12,73 | 12,20 | 36 | 28,65 | 28,10 |
| 17 | 13,53 | 13,00 | 40 | 31,83 | 31,30 |
| 18 | 14,32 | 13,80 | 44 | 35,01 | 34,50 |
| 19 | 15,12 | 14,60 | 48 | 38,20 | 37,70 |
| 20 | 15,92 | 15,40 | 60 | 47,75 | 47,25 |
| 21 | 16,71 | 16,20 | 72 | 55,20 | 55,20 |

MEGALINEAR T5 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 6 | 10 | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|----------------------|----|----|----|----|----|-----|-----|-----|-----|
| Weight (gr/m) | 15 | 20 | 35 | 55 | 70 | 105 | 160 | 215 | 330 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness*: **2,2 +/- 0,15 mm**
- Standard thickness with NFT-NFB: **2,4 +/- 0,15 mm***
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

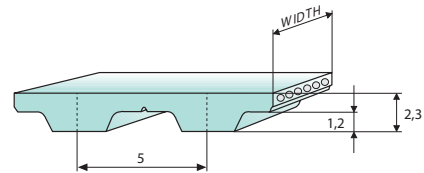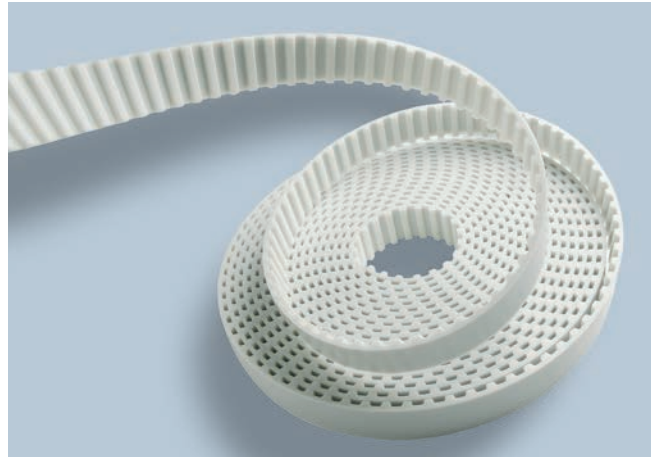

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 24 | 23 | 23 | 22 | 22 | 22 | 20 | 19 | 19 | 18 | 17 | 16 | 15 | 14 | 12 | 11 | 11 | 9 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 6 | 10 | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|-----------------|--------------------------|------|------|------|------|------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 185 | 375 | 500 | 840 | 1060 | 1750 | 2400 | 3220 | 3640 |
| | Breaking Strength (N) | 750 | 1500 | 2000 | 3375 | 4250 | 7000 | 9125 | 12250 | 12750 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 395 | 795 | 1060 | 1795 | 2260 | 3720 | 5110 | 6860 | 7750 |
| | Breaking Strength (N) | 1595 | 3190 | 4255 | 7180 | 9040 | 14895 | 19415 | 26065 | 27130 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | - | 585 | 780 | 1315 | 1655 | 2730 | 3745 | 5025 | - |
| | Breaking Strength (N) | - | 2340 | 3120 | 5265 | 6630 | 10920 | 14235 | 19110 | - |
| | Elongation at MTL (mm/m) | - | 4 | 4 | 4 | 4 | 4 | 4 | 4 | - |
| HF | Max Traction Load (N) | - | 490 | 655 | 1105 | 1390 | 2295 | 3150 | 4225 | - |
| | Breaking Strength (N) | - | 1965 | 2620 | 4425 | 5575 | 9180 | 11970 | 16070 | - |
| | Elongation at MTL (mm/m) | - | 5 | 5 | 5 | 5 | 5 | 5 | 5 | - |
| Stainless | Max Traction Load (N) | 105 | 210 | 285 | 480 | - | - | - | - | - |
| | Breaking Strength (N) | 425 | 855 | 1140 | 1920 | - | - | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - | - | - |

Average values


FLEXION RESISTANCE

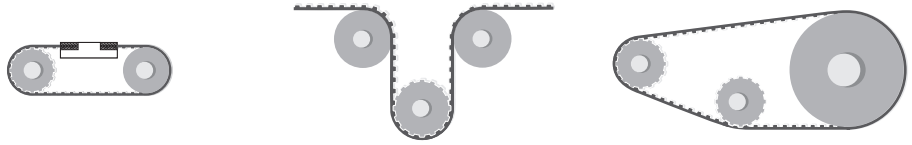


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 10 | 15 | 30 | 10 | 30 |
| Kevlar cords | 12 | 15 | 30 | 12 | 30 |
| High Power cords | 15 | 15 | 40 | 15 | 60 |
| High Flexibility cords | 10 | 12 | 30 | 10 | 30 |
| Stainless steel cords | 15 | 18 | 40 | 15 | 40 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

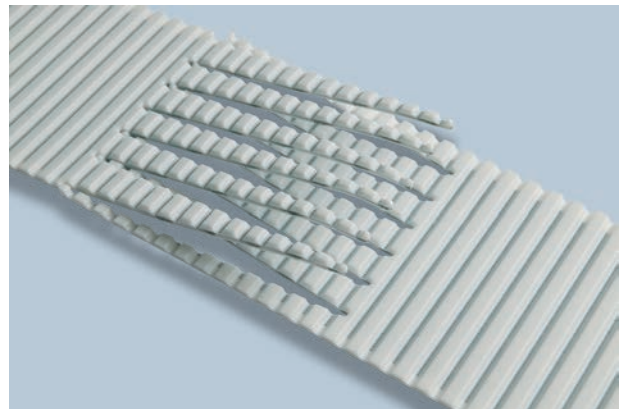

PULLEYS (for more details please see our pulleys catalogue)

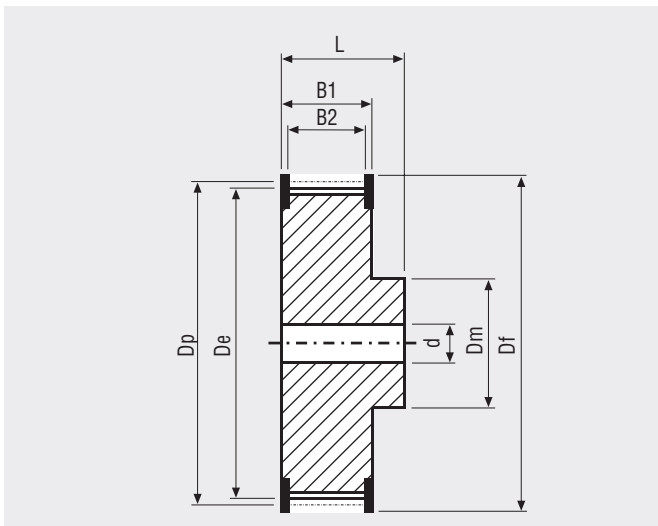

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 10 | 15,92 | 15,09 | 25 | 39,79 | 38,96 |
| 12 | 19,10 | 18,27 | 28 | 44,56 | 43,73 |
| 14 | 22,28 | 21,45 | 30 | 47,75 | 46,92 |
| 15 | 23,87 | 23,04 | 32 | 50,93 | 50,10 |
| 16 | 25,46 | 24,64 | 36 | 57,30 | 56,47 |
| 18 | 28,65 | 27,82 | 40 | 63,66 | 62,93 |
| 19 | 30,24 | 29,41 | 42 | 66,85 | 66,02 |
| 20 | 31,83 | 31,00 | 44 | 70,03 | 69,20 |
| 22 | 35,01 | 34,19 | 48 | 76,39 | 75,57 |
| 24 | 38,20 | 37,37 | 60 | 95,49 | 94,67 |

MEGALINEAR T5 WIDE OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 250 | 500 |
|----------------------|-----|------|
| Weight (gr/m) | 500 | 1000 |

Standard compound: **white Polyurethane thermoplastic 90 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion Kevlar at pitch 3,5 mm**

Standard width tolerance: **+/- 2 mm**


Standard thickness: **2,2 +/- 0,15 mm**

Standard length tolerance: **+/- 0,8 mm/m**


Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Transparent FDA compound

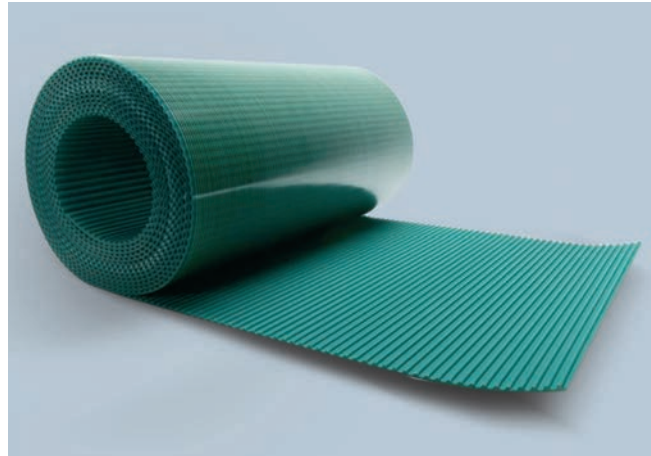

TOOTH PROFILE ACCORDING ISO 17396

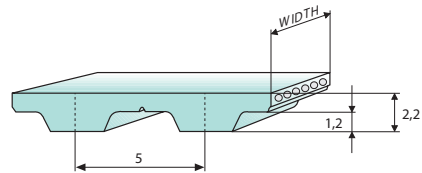

TOOTH RESISTANCE


| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 17 | 16 | 16 | 15 | 15 | 15 | 14 | 13 | 13 | 12 | 12 | 11 |

TRACTION RESISTANCE

| Belt width (mm) | | 250 | 500 |
|-----------------|--------------------------|-------|-------|
| Kevlar | Max Traction Load (N) | 5300 | 10600 |
| | Breaking Strength (N) | 18550 | 37100 |
| | Elongation at MTL (mm/m) | 8 | 8 |

Average values

FLEXION RESISTANCE

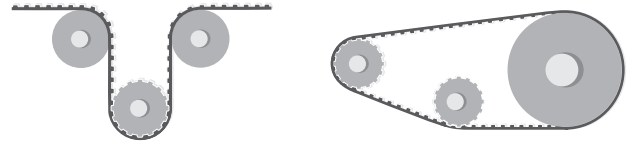


| | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|--------------|-----------|--------------------|-----------|--------------------|
| Kevlar cords | 15 | 45 | 12 | 45 |

JOINED BELT INFORMATIONS

- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table



PULLEYS (for more details please see our pulleys catalogue)

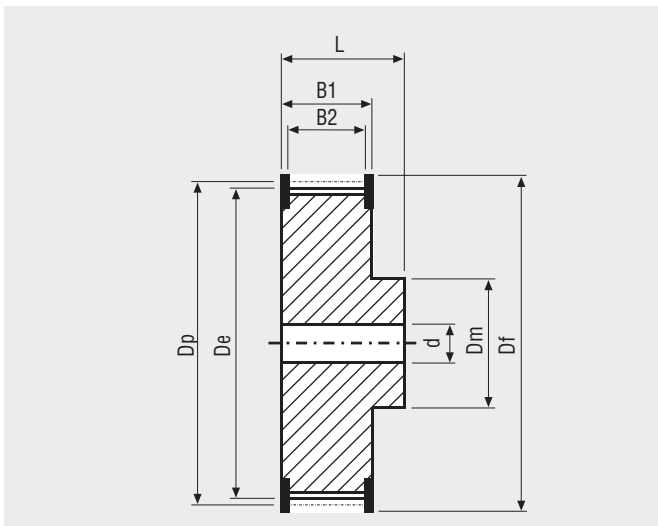

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|--------|----------|-------|-------|
| 10 | 15,92 | 15,09 | 25 | 39,79 | 38,96 |
| 12 | 19,10 | 18,275 | 28 | 44,56 | 43,73 |
| 14 | 22,28 | 21,45 | 30 | 47,75 | 46,92 |
| 15 | 23,87 | 23,04 | 32 | 50,93 | 50,10 |
| 16 | 25,46 | 24,64 | 36 | 57,30 | 56,47 |
| 18 | 28,65 | 27,82 | 40 | 63,66 | 62,93 |
| 19 | 30,24 | 29,41 | 42 | 66,85 | 66,02 |
| 20 | 31,83 | 31,00 | 44 | 70,03 | 69,20 |
| 22 | 35,01 | 34,19 | 48 | 76,39 | 75,57 |
| 24 | 38,20 | 37,37 | 60 | 95,49 | 94,67 |




MEGALINEAR TT5 FOR KNITTING MACHINE

BELT CHARACTERISTICS

| | |
|-----------------------------|-----------|
| STANDARD WIDTHS (mm) | 10 |
| Weight (gr/m) | 20 |

Standard compound: **white Polyurethane thermoplastic 88 ShA**
 Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **+/- 0,5 mm**
 Standard thickness: **3 + 0,2/- 0,1 mm**
 Standard length tolerance: **+/- 0,8 mm/m**
 Standard roll length: **100 m**

Standard compound: **blue Polyurethane thermoplastic 88 ShA**
 Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **S and Z torsion kevlar**
 Standard width tolerance: **+/- 0,5 mm**
 Standard thickness: **2,8 +/- 0,15 mm**
 Standard length tolerance: **+/- 0,8 mm/m**
 Standard roll length: **100 m**

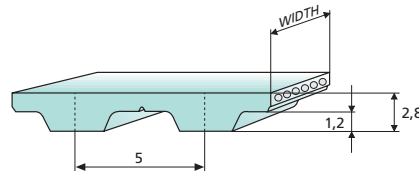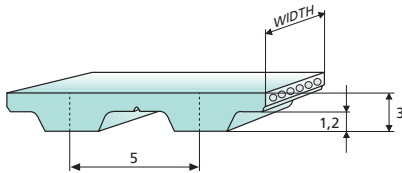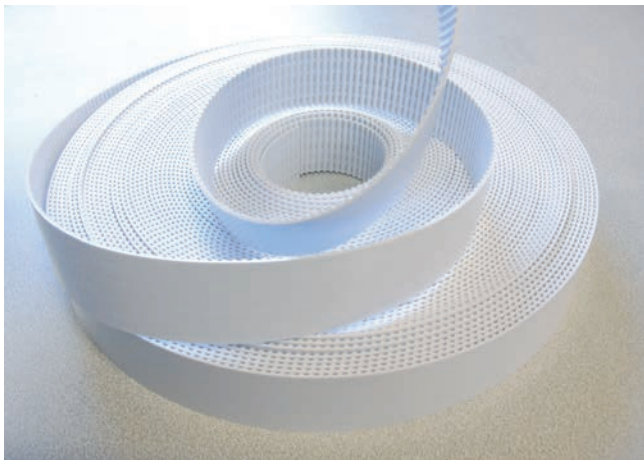

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 24 | 23 | 23 | 22 | 22 | 22 | 20 | 19 | 19 | 18 | 17 | 16 | 15 | 14 | 12 | 11 | 11 | 9 |


TRACTION RESISTANCE

| | | |
|------------------------|--------------------------|------|
| Belt width (mm) | 10 | |
| Steel | Max Traction Load (N) | 375 |
| | Breaking Strength (N) | 1500 |
| | Elongation at MTL (mm/m) | 4 |
| Kevlar | Max Traction Load (N) | 795 |
| | Breaking Strength (N) | 3190 |
| | Elongation at MTL (mm/m) | 8 |

Average values

MEGALINEAR TT5 FOR KNITTING MACHINE


FLEXION RESISTANCE

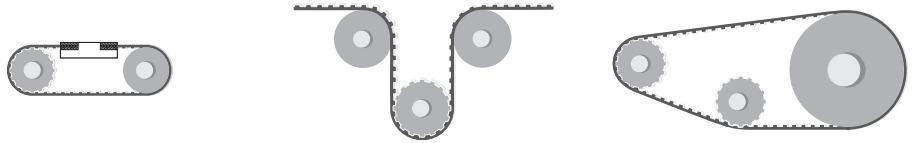

| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 10 | 15 | 30 | 10 | 30 |
| Kevlar cords | 12 | 15 | 30 | 12 | 30 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, and NFB can be joined too
- Minimum diameters according above table


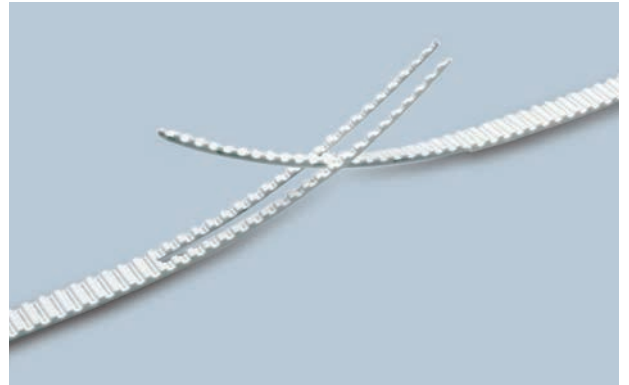


MEGALINEAR T10 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 12 | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|----------------------|----|----|-----|-----|-----|-----|-----|-----|
| Weight (gr/m) | 50 | 75 | 115 | 145 | 225 | 340 | 435 | 680 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **4,5 +/- 0,3 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - SUPERGRIP PVC
 - Cleats

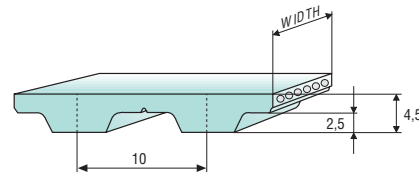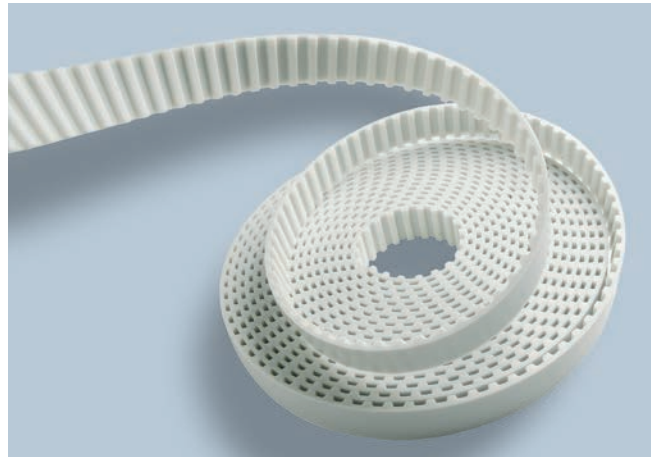

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 51 | 49 | 48 | 47 | 46 | 45 | 41 | 39 | 37 | 36 | 33 | 31 | 28 | 25 | 22 | 20 | 18 | 14 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 12 | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|-----------------|--------------------------|------|------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 1050 | 1470 | 2410 | 3045 | 5040 | 8065 | 10830 | 12480 |
| | Breaking Strength (N) | 4200 | 5880 | 9660 | 12180 | 20160 | 30660 | 41160 | 43680 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 895 | 1150 | 2050 | 2565 | 4360 | 7020 | 9450 | 15240 |
| | Breaking Strength (N) | 3590 | 4615 | 8205 | 10260 | 17440 | 26675 | 35910 | 53350 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | 1660 | 2135 | 3800 | 4750 | 8075 | 13000 | 17500 | 28225 |
| | Breaking Strength (N) | 6650 | 8550 | 15200 | 19000 | 32300 | 49400 | 66500 | 98800 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| HF | Max Traction Load (N) | 1100 | 1540 | 2530 | 3190 | 5280 | 8450 | 11345 | 13070 |
| | Breaking Strength (N) | 4400 | 6160 | 10120 | 12760 | 21120 | 32120 | 43120 | 45760 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| HPF | Max Traction Load (N) | - | 2385 | 4240 | 5300 | 9010 | 14505 | 19525 | 31495 |
| | Breaking Strength (N) | - | 9540 | 16960 | 21200 | 36040 | 55120 | 74200 | 110240 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Stainless | Max Traction Load (N) | 805 | 1130 | 1855 | 2340 | 3875 | - | - | - |
| | Breaking Strength (N) | 3230 | 4520 | 7425 | 9365 | 15500 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - |

Average values


FLEXION RESISTANCE

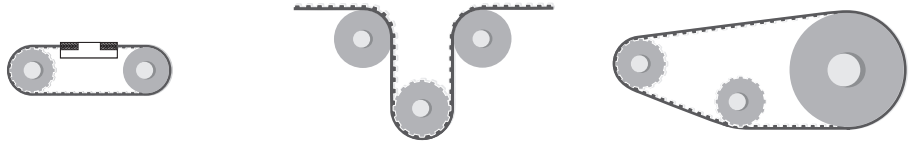


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|---------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 12 | 20 | 60 | 12 | 60 |
| Kevlar cords | 15 | 20 | 60 | 15 | 60 |
| High Power cords | 15 | 20 | 100 | 15 | 100 |
| High Flexibility cords | 12 | 15 | 50 | 12 | 50 |
| High Power Flexible cords | 14 | 20 | 80 | 14 | 80 |
| Stainless steel cords | 15 | 20 | 70 | 15 | 70 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

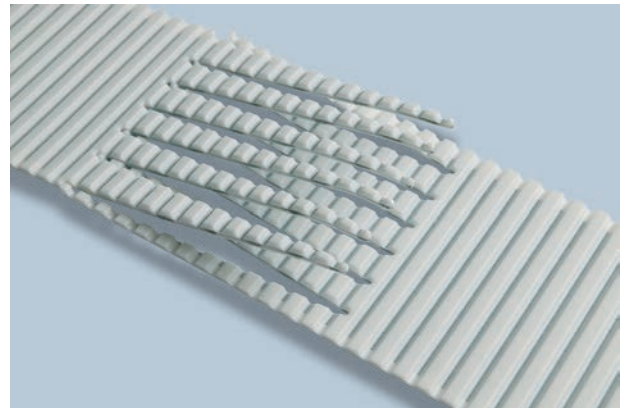

PULLEYS (for more details please see our pulleys catalogue)

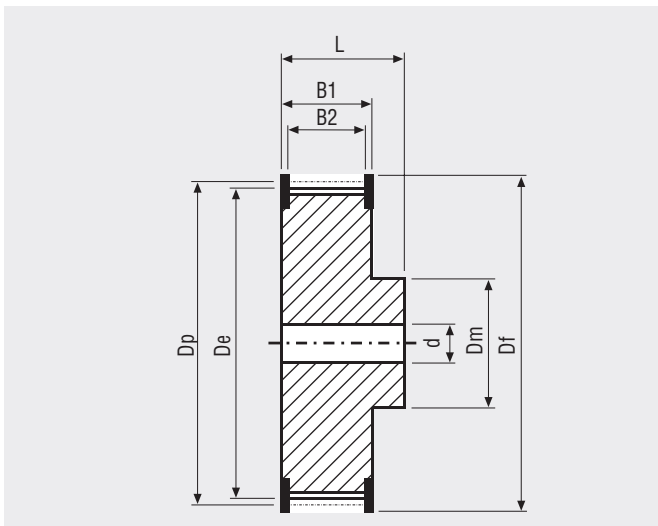


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 12 | 38,20 | 36,35 | 26 | 82,76 | 80,91 |
| 14 | 44,56 | 42,71 | 27 | 85,94 | 84,10 |
| 15 | 47,75 | 45,90 | 28 | 89,13 | 87,28 |
| 16 | 50,93 | 49,08 | 30 | 95,49 | 93,65 |
| 18 | 57,30 | 55,45 | 32 | 101,86 | 100,01 |
| 19 | 60,48 | 58,63 | 36 | 114,59 | 112,74 |
| 20 | 63,66 | 61,81 | 40 | 127,32 | 125,48 |
| 22 | 70,03 | 68,18 | 44 | 140,06 | 138,21 |
| 24 | 76,39 | 74,55 | 48 | 152,79 | 150,94 |
| 25 | 79,58 | 77,73 | 60 | 190,99 | 189,14 |

MEGALINEAR T10 WITHOUT GAP OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 16 | 25 | 32 | 50 | 75 |
|----------------------|----|-----|-----|-----|-----|
| Weight (gr/m) | 74 | 115 | 148 | 230 | 345 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **+/- 0,5 mm**
 Standard thickness: **4,5 +/- 0,3 mm**
 Standard length tolerance: **+/- 0,8 mm/m**
 Standard roll length: **100 m**

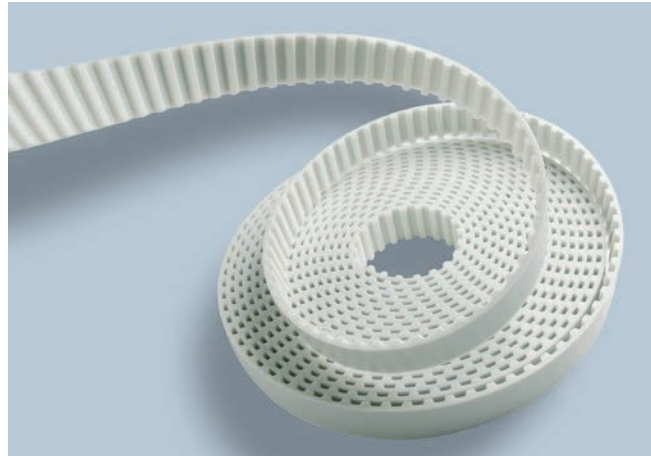

TOOTH PROFILE ACCORDING ISO 17396

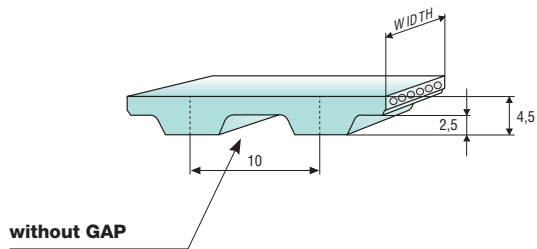

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 51 | 49 | 48 | 47 | 46 | 45 | 41 | 39 | 37 | 36 | 33 | 31 | 28 | 25 | 22 | 20 | 18 | 14 |

Minimum suggested number of teeth in clamp for linear movement: 7


TRACTION RESISTANCE

| Belt width (mm) | | 16 | 25 | 32 | 50 | 75 |
|-----------------|--------------------------|------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 1365 | 2310 | 2940 | 4830 | 7955 |
| | Breaking Strength (N) | 5460 | 9240 | 11760 | 19320 | 30240 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 1665 | 2820 | 3330 | 5640 | 8910 |
| | Breaking Strength (N) | 6665 | 11285 | 13335 | 22570 | 33855 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 |

Average values

MEGALINEAR T10 WITHOUT GAP OPEN-END

FLEXION RESISTANCE

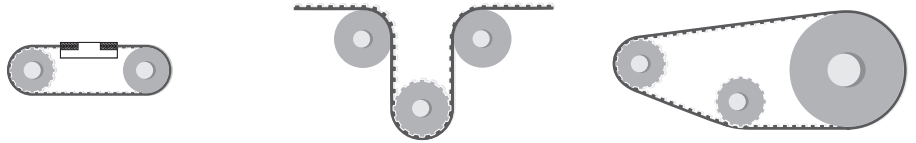


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 12 | 20 | 60 | 12 | 60 |
| Kevlar cords | 15 | 20 | 60 | 15 | 60 |

TYPICAL APPLICATION - CAR WASHING MACHINE



PULLEYS (for more details please see our pulleys catalogue)

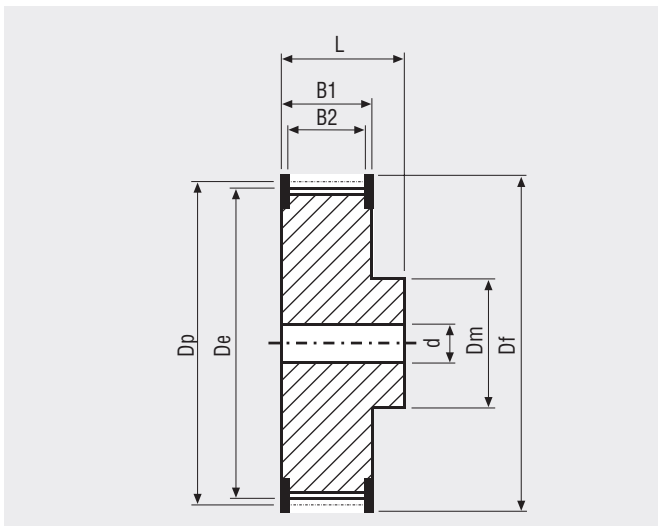

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 12 | 38,20 | 36,35 | 26 | 82,76 | 80,91 |
| 14 | 44,56 | 42,71 | 27 | 85,94 | 84,10 |
| 15 | 47,75 | 45,90 | 28 | 89,13 | 87,28 |
| 16 | 50,93 | 49,08 | 30 | 95,49 | 93,65 |
| 18 | 57,30 | 55,45 | 32 | 101,86 | 100,01 |
| 19 | 60,48 | 58,63 | 36 | 114,59 | 112,74 |
| 20 | 63,66 | 61,81 | 40 | 127,32 | 125,48 |
| 22 | 70,03 | 68,18 | 44 | 140,06 | 138,21 |
| 24 | 76,39 | 74,55 | 48 | 152,79 | 150,94 |
| 25 | 79,58 | 77,73 | 60 | 190,99 | 189,14 |

MEGALINEAR T10 WIDE OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 200 | 250 | 300 | 400 | 450 | 500 |
|----------------------|-----|-----|-----|-----|-----|------|
| Weight (gr/m) | 410 | 510 | 615 | 820 | 920 | 1020 |

Standard compound: **white Polyurethane thermoplastic 90 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion Kevlar at pitch 3,5 mm**

Standard width tolerance: **+/- 2 mm**


Standard thickness: **4,5 +/- 0,3 mm**

Standard length tolerance: **+/- 0,8 mm/m**


Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Antistatic Nylon fabric
- Transparent FDA compound

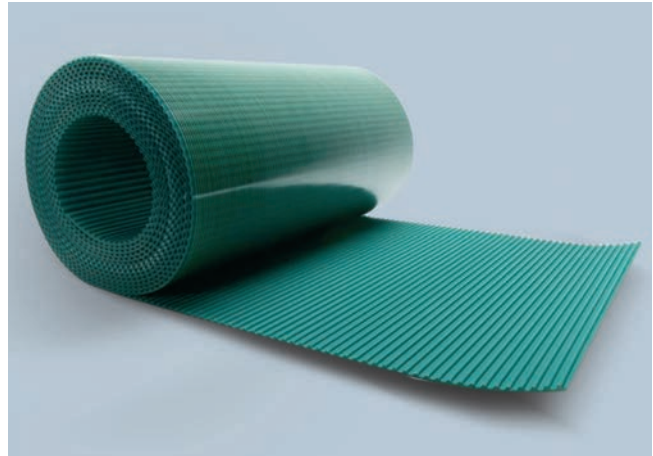

TOOTH PROFILE ACCORDING ISO 17396

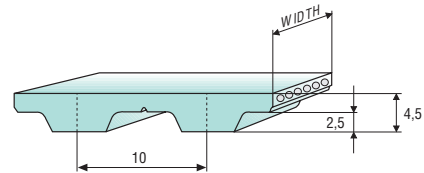

TOOTH RESISTANCE


| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $F_{p\ spec}$ (N/cm) | 36 | 34 | 34 | 33 | 32 | 31 | 29 | 27 | 26 | 25 | 23 | 22 |

TRACTION RESISTANCE

| Belt width (mm) | | 200 | 250 | 300 | 400 | 450 | 500 |
|-----------------|--------------------------|-------|-------|-------|-------|-------|-------|
| Kevlar | Max Traction Load (N) | 8350 | 10255 | 12310 | 16560 | 18610 | 20810 |
| | Breaking Strength (N) | 29240 | 35905 | 43090 | 57965 | 65150 | 72845 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 |

Average values

FLEXION RESISTANCE

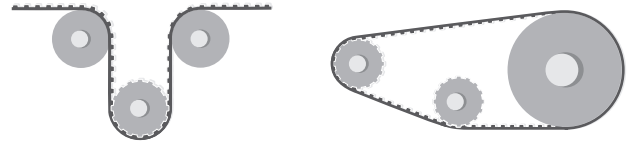


| | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|--------------|-----------|--------------------|-----------|--------------------|
| Kevlar cords | 20 | 60 | 15 | 60 |

JOINED BELT INFORMATIONS

- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table



PULLEYS (for more details please see our pulleys catalogue)

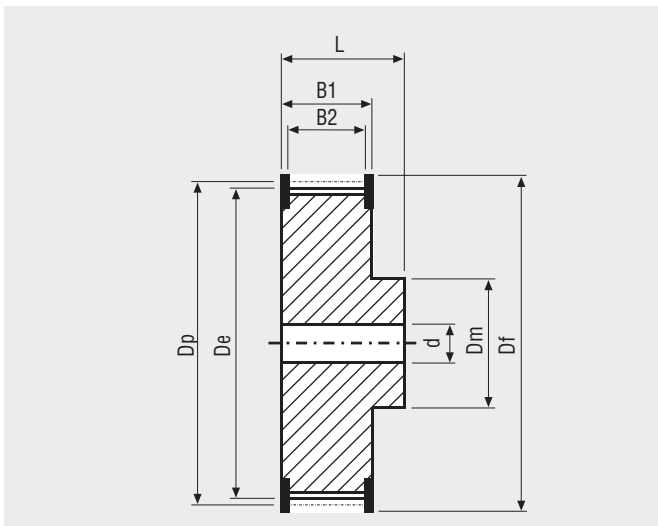



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 12 | 38,20 | 36,35 | 26 | 82,76 | 80,91 |
| 14 | 44,56 | 42,71 | 27 | 85,94 | 84,10 |
| 15 | 47,75 | 45,90 | 28 | 89,13 | 87,28 |
| 16 | 50,93 | 49,08 | 30 | 95,49 | 93,65 |
| 18 | 57,30 | 55,45 | 32 | 101,86 | 100,01 |
| 19 | 60,48 | 58,63 | 36 | 114,59 | 112,74 |
| 20 | 63,66 | 61,81 | 40 | 127,32 | 125,48 |
| 22 | 70,03 | 68,18 | 44 | 140,06 | 138,21 |
| 24 | 76,39 | 74,55 | 48 | 152,79 | 150,94 |
| 25 | 79,58 | 77,73 | 60 | 190,99 | 189,14 |

MEGALINEAR T20 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 | 32 | 50 | 75 | 100 | 150 |
|----------------------|-----|-----|-----|-----|-----|------|
| Weight (gr/m) | 185 | 235 | 370 | 550 | 735 | 1095 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard thickness: **8 +/- 0,45 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

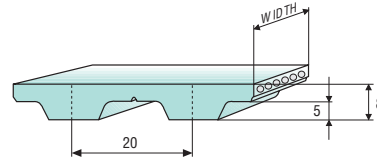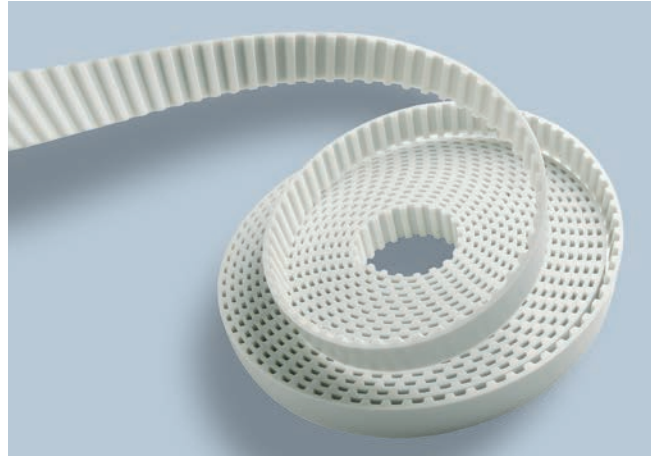

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 102 | 98 | 95 | 93 | 91 | 89 | 81 | 76 | 72 | 68 | 62 | 57 | 50 | 45 | 38 | 33 | 29 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 | 32 | 50 | 75 | 100 | 150 |
|-----------------|--------------------------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 3800 | 4750 | 8075 | 13000 | 17500 | 28225 |
| | Breaking Strength (N) | 15200 | 19000 | 32300 | 49400 | 66500 | 98800 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 4215 | 5620 | 9135 | 14800 | 19975 | 32940 |
| | Breaking Strength (N) | 16870 | 22495 | 36555 | 56240 | 75920 | 115290 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | 5190 | 6920 | 11245 | 18210 | 24580 | 40530 |
| | Breaking Strength (N) | 20760 | 27680 | 44980 | 69200 | 93420 | 141860 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| HF | Max Traction Load (N) | 4240 | 5300 | 9090 | 14505 | - | - |
| | Breaking Strength (N) | 16960 | 21200 | 36040 | 55120 | - | - |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | - | - |
| HPF | Max Traction Load (N) | 5775 | 7700 | 12510 | 20260 | - | - |
| | Breaking Strength (N) | 23100 | 30800 | 50050 | 77000 | - | - |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | - | - |
| Stainless | Max Traction Load (N) | 2865 | 3585 | 6095 | - | - | - |
| | Breaking Strength (N) | 11475 | 14345 | 24385 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - | - | - |

Average values


FLEXION RESISTANCE

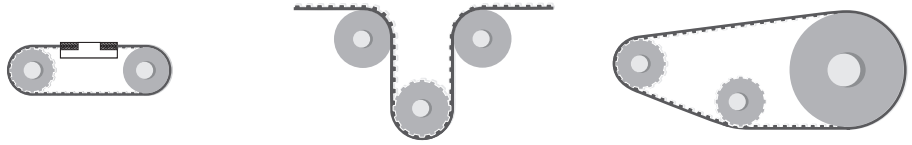


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|---------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 25 | 120 | 15 | 120 |
| Kevlar cords | 15 | 25 | 120 | 15 | 120 |
| High Power cords | 20 | 25 | 150 | 20 | 150 |
| High Flexibility cords | 15 | 20 | 120 | 15 | 120 |
| High Power Flexible cords | 18 | 25 | 120 | 18 | 120 |
| Stainless steel cords | 20 | 25 | 130 | 20 | 130 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

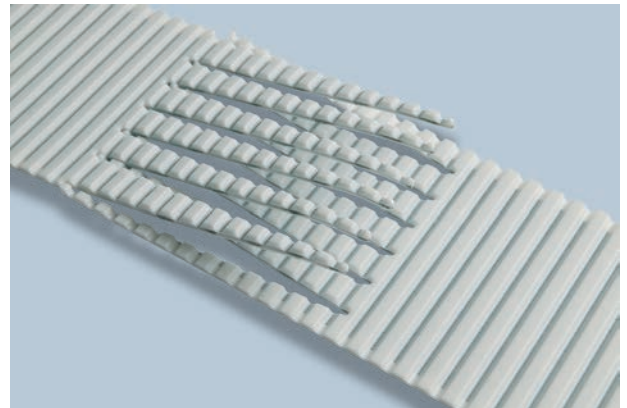

PULLEYS (for more details please see our pulleys catalogue)

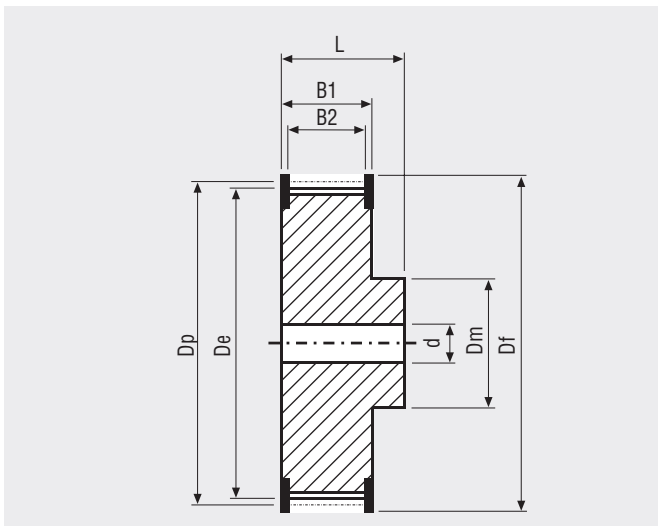

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 15 | 95,54 | 92,69 | 30 | 190,99 | 188,13 |
| 18 | 114,59 | 111,73 | 32 | 203,72 | 200,86 |
| 20 | 127,32 | 124,47 | 36 | 229,18 | 226,33 |
| 22 | 140,06 | 137,20 | 40 | 254,65 | 251,80 |
| 24 | 152,79 | 149,93 | 48 | 305,58 | 302,73 |
| 25 | 159,15 | 156,30 | 60 | 381,97 | 379,12 |

MEGALINEAR AT3 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 20 | 25 | 50 |
|----------------------|----|----|----|-----|
| Weight (gr/m) | 20 | 45 | 60 | 115 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**

Standard thickness: **1,9 +/- 0,1 mm**


Standard length tolerance: **+/- 0,5 mm/m**

Standard roll length: **100 m**


Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Antistatic nylon fabric

Different back coating materials see page 116

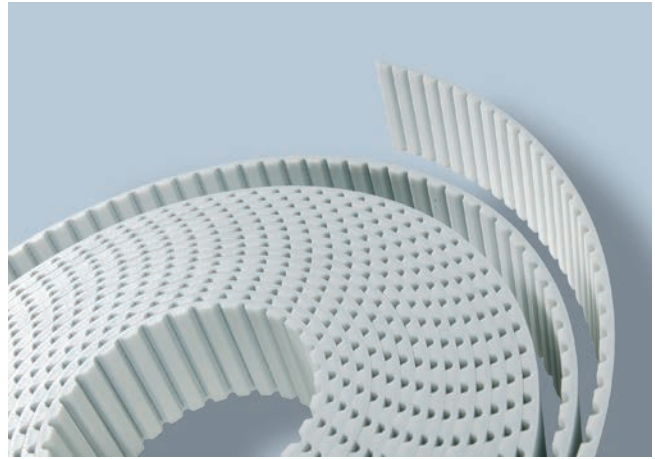

TOOTH PROFILE ACCORDING ISO 17396

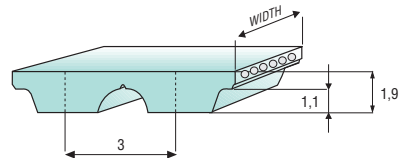

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| F _{p spec} (N/cm) | 24 | 24 | 24 | 23 | 23 | 23 | 22 | 21 | 21 | 20 | 19 | 18 | 16 | 15 | 14 | 13 | 12 | 10 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 20 | 25 | 50 |
|-----------------|--------------------------|------|------|------|------|
| Steel | Max Traction Load (N) | 410 | 820 | 1065 | 2170 |
| | Breaking Strength (N) | 1640 | 3280 | 4260 | 8690 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

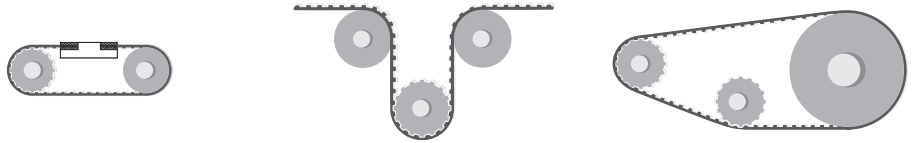


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 20 | 25 | 30 | 20 | 30 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

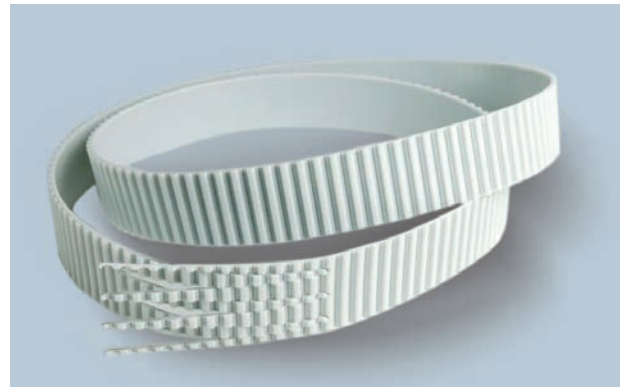

PULLEYS (for more details please see our pulleys catalogue)

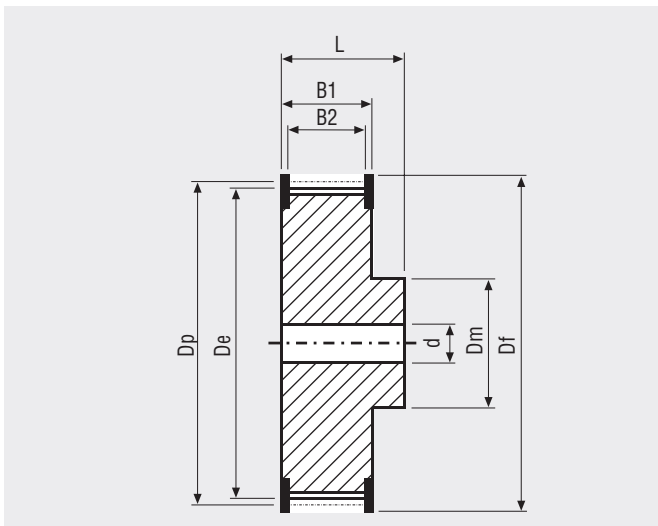



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 20 | 19,10 | 18,69 | 36 | 34,39 | 33,97 |
| 22 | 21,01 | 20,6 | 40 | 38,21 | 37,79 |
| 24 | 22,92 | 22,51 | 44 | 42,03 | 41,61 |
| 25 | 23,88 | 23,46 | 45 | 42,99 | 42,56 |
| 27 | 25,79 | 25,37 | 48 | 45,85 | 45,43 |
| 30 | 28,66 | 28,24 | 60 | 57,32 | 58,69 |
| 32 | 30,57 | 30,15 | 72 | 68,78 | 68,34 |

MEGALINEAR AT5 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 6 | 10 | 16 | 25 | 32 | 50 | 75 | 100 |
|----------------------|----|----|----|----|-----|-----|-----|-----|
| Weight (gr/m) | 20 | 35 | 50 | 80 | 105 | 165 | 245 | 340 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **2,7 +/- 0,2 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- HP+HPF cord lenght tolerance: **+0/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Cleats

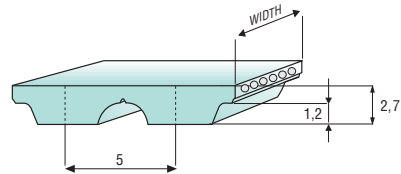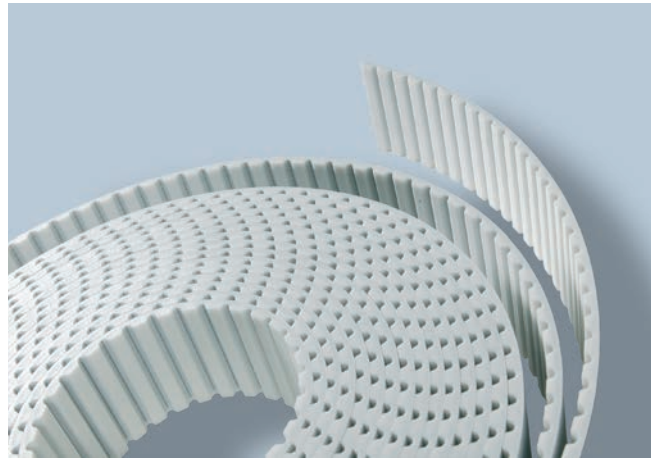

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 35 | 35 | 35 | 34 | 34 | 34 | 32 | 31 | 30 | 29 | 27 | 26 | 24 | 22 | 19 | 18 | 16 | 13 |


Minimum suggested number of teeth in clamp for linear movement: 7 - HP/HPF cords minimum suggested number of teeth in clamp 10

TRACTION RESISTANCE

| Belt width (mm) | | 6 | 10 | 16 | 25 | 32 | 50 | 75 | 100 |
|-----------------|--------------------------|------|------|------|-------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 400 | 670 | 1070 | 1805 | 2275 | 3750 | 5145 | 6910 |
| | Breaking Strength (N) | 1605 | 2680 | 4285 | 7235 | 9110 | 15005 | 19560 | 26260 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 395 | 665 | 1060 | 1795 | 2260 | 3720 | 5110 | 6860 |
| | Breaking Strength (N) | 1595 | 2660 | 4255 | 7180 | 9040 | 14895 | 19415 | 26065 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | - | 840 | 1470 | 2415 | 3045 | 5040 | - | - |
| | Breaking Strength (N) | - | 3360 | 5880 | 9660 | 12180 | 20160 | - | - |
| | Elongation at MTL (mm/m) | - | 4 | 4 | 4 | 4 | 4 | - | - |
| HF | Max Traction Load (N) | - | 685 | 1100 | 1855 | 2335 | 3850 | - | - |
| | Breaking Strength (N) | - | 2750 | 4400 | 7425 | 9350 | 15400 | - | - |
| | Elongation at MTL (mm/m) | - | 5 | 5 | 5 | 5 | 5 | - | - |
| HPF | Max Traction Load (N) | - | 880 | 1540 | 2530 | 3190 | 5280 | - | - |
| | Breaking Strength (N) | - | 3520 | 6160 | 10120 | 12760 | 21120 | - | - |
| | Elongation at MTL (mm/m) | - | 5 | 5 | 5 | 5 | 5 | - | - |
| Stainless | Max Traction Load (N) | 310 | 520 | 835 | 1410 | - | - | - | - |
| | Breaking Strength (N) | 1250 | 2090 | 3340 | 5640 | - | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - | - |

Average values

FLEXION RESISTANCE

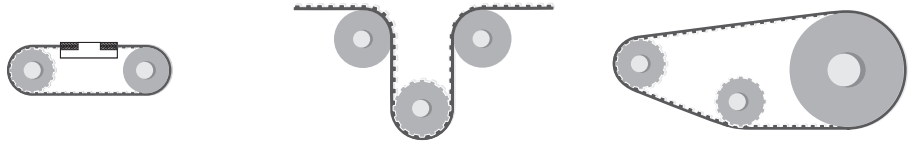


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|---------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 15 | 60 | 15 | 25 |
| Kevlar cords | 15 | 25 | 60 | 15 | 25 |
| High Power cords | 25 | 25 | 60 | 25 | 40 |
| High Flexibility cords | 12 | 13 | 40 | 12 | 25 |
| High Power Flexible cords | 20 | 24 | 40 | 20 | 40 |
| Stainless steel cords | 15 | 18 | 65 | 15 | 60 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

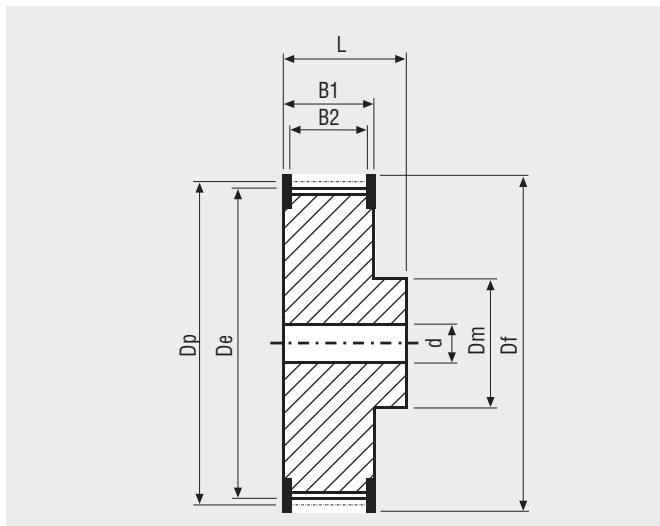



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 15 | 23,87 | 22,64 | 28 | 44,56 | 43,33 |
| 16 | 25,46 | 24,24 | 30 | 47,75 | 46,52 |
| 18 | 28,65 | 27,42 | 32 | 50,93 | 49,70 |
| 19 | 30,24 | 29,01 | 36 | 57,30 | 56,07 |
| 20 | 31,83 | 30,60 | 40 | 63,66 | 62,43 |
| 22 | 35,01 | 33,79 | 42 | 66,85 | 65,62 |
| 24 | 38,20 | 36,97 | 44 | 70,03 | 68,80 |
| 25 | 39,79 | 38,56 | 48 | 76,39 | 75,17 |
| 26 | 41,38 | 40,15 | 60 | 95,49 | 94,27 |
| 27 | 42,97 | 41,74 | | | |

MEGALINEAR AT10 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|----------------------|----|-----|-----|-----|-----|-----|-----|
| Weight (gr/m) | 90 | 160 | 185 | 290 | 435 | 580 | 890 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **4,5 +/- 0,3 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- HP+HPF cord lenght tolerance: **+0/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

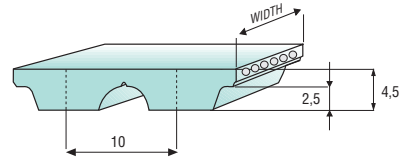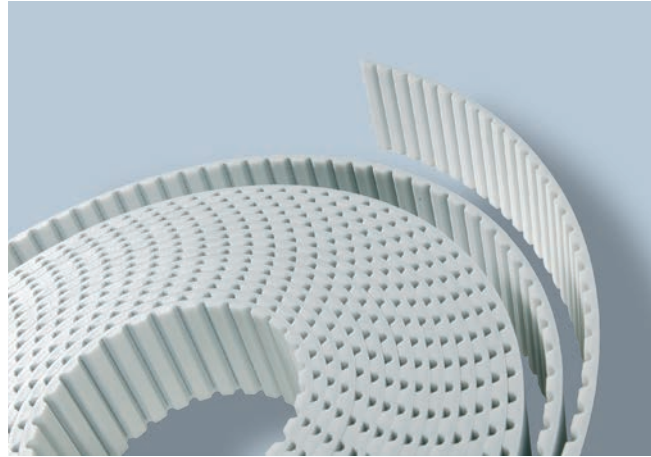

Different back coating materials see page 116
TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 83 | 80 | 80 | 80 | 78 | 77 | 73 | 69 | 67 | 65 | 58 | 55 | 48 | 44 | 38 | 33 | 30 | 22 |


Minimum suggested number of teeth in clamp for linear movement: 7 - HP/HPF cords minimum suggested number of teeth in clamp 10

TRACTION RESISTANCE

| Belt width (mm) | | 16 | 25 | 32 | 50 | 75 | 100 | 150 |
|-----------------|--------------------------|-------|-------|-------|-------|-------|--------|--------|
| Steel | Max Traction Load (N) | 2270 | 4000 | 5160 | 8590 | 13800 | 18600 | 30600 |
| | Breaking Strength (N) | 9100 | 16100 | 20200 | 34300 | 50500 | 70700 | 105000 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 2105 | 4215 | 5620 | 9135 | 14800 | 19980 | 32940 |
| | Breaking Strength (N) | 8435 | 16870 | 22495 | 36555 | 56240 | 75920 | 115290 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | 3460 | 5190 | 6920 | 11245 | 18210 | 24580 | 40530 |
| | Breaking Strength (N) | 13840 | 20760 | 27680 | 44980 | 69200 | 93420 | 141860 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| HF | Max Traction Load (N) | 2385 | 4240 | 5300 | 9010 | 14505 | 19525 | 31495 |
| | Breaking Strength (N) | 9540 | 16960 | 21200 | 36040 | 55120 | 74200 | 110240 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| HPF | Max Traction Load (N) | 3850 | 5775 | 7700 | 12510 | 20260 | 27355 | 45100 |
| | Breaking Strength (N) | 15400 | 23100 | 30800 | 50050 | 77000 | 103950 | 157850 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Stainless | Max Traction Load (N) | 1610 | 2865 | 3585 | 6095 | - | - | - |
| | Breaking Strength (N) | 6455 | 11475 | 14345 | 24385 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | - | - | - |

Average values

FLEXION RESISTANCE

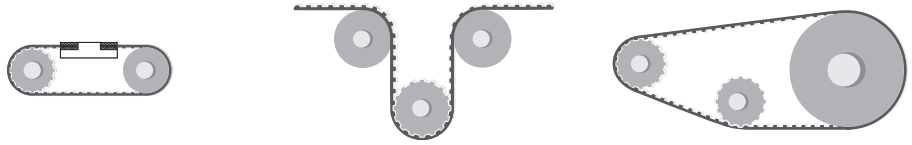


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|---------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 20 | 120 | 15 | 50 |
| Kevlar cords | 15 | 20 | 120 | 15 | 50 |
| High Power cords | 25 | 25 | 150 | 25 | 80 |
| High Flexibility cords | 15 | 20 | 80 | 15 | 50 |
| High Power Flexible cords | 16 | 20 | 100 | 16 | 60 |
| Stainless steel cords | 19 | 25 | 110 | 19 | 110 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

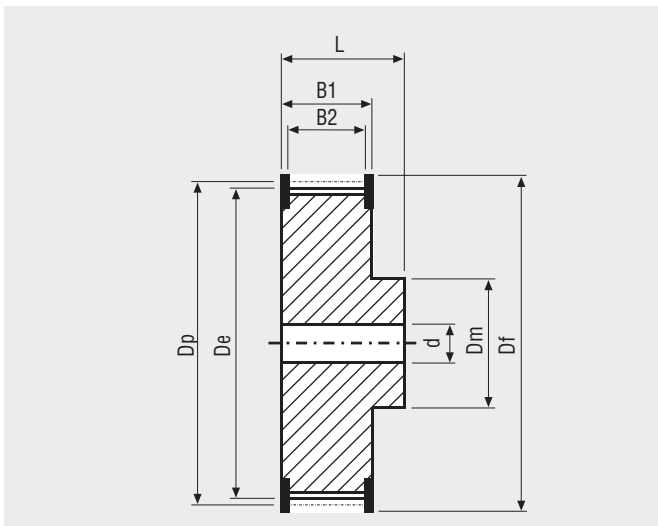


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 15 | 47,75 | 45,90 | 27 | 85,94 | 84,10 |
| 16 | 50,93 | 49,08 | 28 | 89,13 | 87,28 |
| 18 | 57,30 | 55,45 | 30 | 95,49 | 93,65 |
| 19 | 60,48 | 58,63 | 32 | 101,86 | 100,01 |
| 20 | 63,66 | 61,81 | 36 | 114,59 | 112,74 |
| 22 | 70,03 | 68,18 | 40 | 127,32 | 125,48 |
| 24 | 76,39 | 74,55 | 44 | 140,06 | 138,21 |
| 25 | 79,58 | 77,73 | 48 | 152,79 | 150,94 |
| 26 | 82,76 | 80,91 | 60 | 190,99 | 189,14 |

MEGALINEAR AT10 WITHOUT GAP OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 | 32 | 50 | 75 | 100 |
|----------------------|-----|-----|-----|-----|-----|
| Weight (gr/m) | 160 | 205 | 320 | 480 | 640 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **+/- 0,5 mm**
 Standard thickness: **4,5 +/- 0,3 mm**
 Standard length tolerance: **+/- 0,8 mm/m**
 Standard roll length: **100 m**

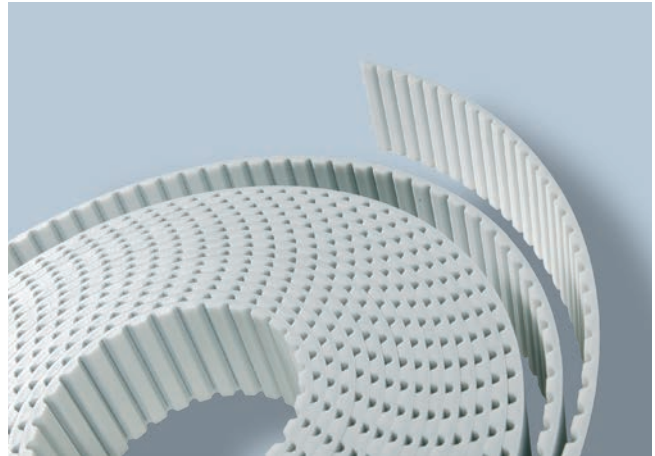

TOOTH PROFILE ACCORDING ISO 17396

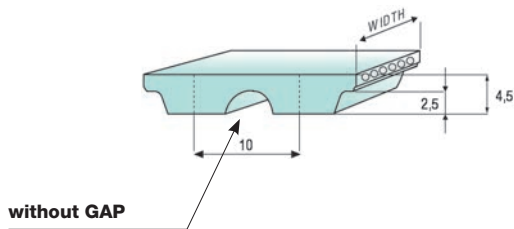

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 74 | 72 | 71 | 71 | 70 | 69 | 65 | 62 | 60 | 58 | 53 | 50 | 44 | 40 | 35 | 30 | 27 | 20 |

Minimum suggested number of teeth in clamp for linear movement: 7


TRACTION RESISTANCE

| Belt width (mm) | | 25 | 32 | 50 | 75 | 100 |
|-----------------|--------------------------|-------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 3560 | 4510 | 7835 | 12750 | 17250 |
| | Breaking Strength (N) | 14250 | 18050 | 31350 | 48450 | 65550 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 |

Average values

MEGALINEAR AT10 WITHOUT GAP OPEN-END

FLEXION RESISTANCE

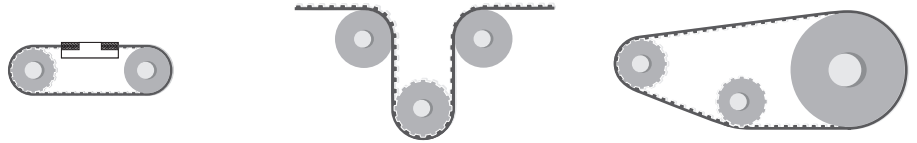


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 20 | 120 | 15 | 50 |

TYPICAL APPLICATION - CAR WASHING MACHINE



PULLEYS (for more details please see our pulleys catalogue)

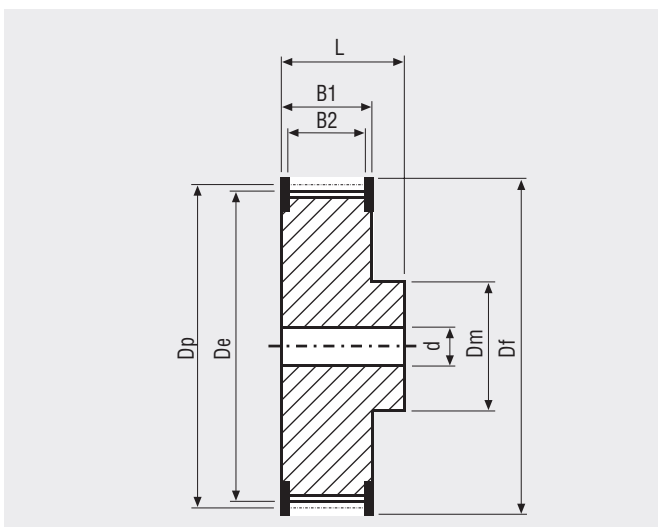



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 15 | 47,75 | 45,90 | 27 | 85,94 | 84,10 |
| 16 | 50,93 | 49,08 | 28 | 89,13 | 87,28 |
| 18 | 57,30 | 55,45 | 30 | 95,49 | 93,65 |
| 19 | 60,48 | 58,63 | 32 | 101,86 | 100,01 |
| 20 | 63,66 | 61,81 | 36 | 114,59 | 112,74 |
| 22 | 70,03 | 68,18 | 40 | 127,32 | 125,48 |
| 24 | 76,39 | 74,55 | 44 | 140,06 | 138,21 |
| 25 | 79,58 | 77,73 | 48 | 152,79 | 150,94 |
| 26 | 82,76 | 80,91 | 60 | 190,99 | 189,14 |

MEGALINEAR AT20 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 | 32 | 50 | 75 | 100 | 150 | 200 |
|----------------------|-----|-----|-----|-----|-----|------|------|
| Weight (gr/m) | 225 | 310 | 480 | 720 | 960 | 1425 | 1935 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard thickness: **8 +/- 0,45 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- HP+HPF cord length tolerance: **+0/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

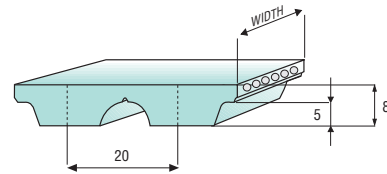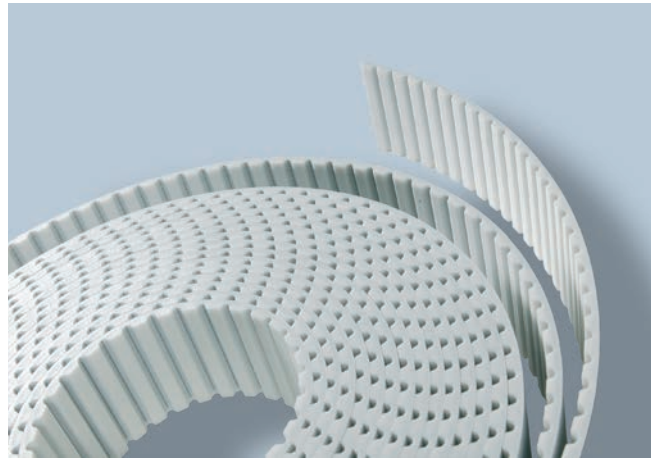

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 17396

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 147 | 144 | 142 | 139 | 137 | 135 | 126 | 119 | 112 | 107 | 97 | 88 | 76 | 67 | 58 | 43 | 35 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 | 32 | 50 | 75 | 100 | 150 | 200 |
|-----------------|--------------------------|-------|-------|-------|-------|--------|--------|--------|
| Steel | Max Traction Load (N) | 5190 | 6920 | 11245 | 18210 | 24580 | 40530 | 53380 |
| | Breaking Strength (N) | 20760 | 27680 | 44980 | 69200 | 93420 | 141860 | 186840 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 4215 | 5620 | 9135 | 14800 | 19980 | 32940 | 41775 |
| | Breaking Strength (N) | 16870 | 22495 | 36555 | 56240 | 75920 | 115290 | 146220 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | - | 10400 | 16000 | 25260 | 34525 | 56685 | 74970 |
| | Breaking Strength (N) | - | 41600 | 64000 | 96000 | 131200 | 198400 | 262400 |
| | Elongation at MTL (mm/m) | - | 4 | 4 | 4 | 4 | 4 | 4 |
| HF | Max Traction Load (N) | 5775 | 7700 | 12510 | 20260 | 27355 | 45100 | 59400 |
| | Breaking Strength (N) | 23100 | 30800 | 50050 | 77000 | 103950 | 157850 | 207900 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 |

Average values

FLEXION RESISTANCE

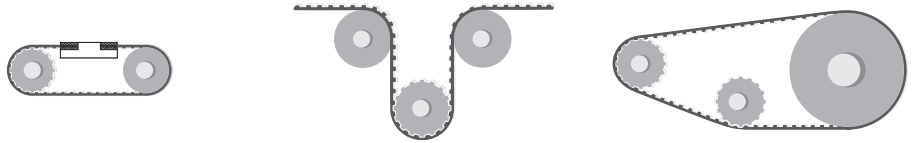


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 18 | 25 | 180 | 18 | 120 |
| Kevlar cords | 18 | 25 | 180 | 18 | 120 |
| High Power cords | 25 | 25 | 250 | 25 | 160 |
| High Flexibility cords | 18 | 25 | 150 | 18 | 120 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

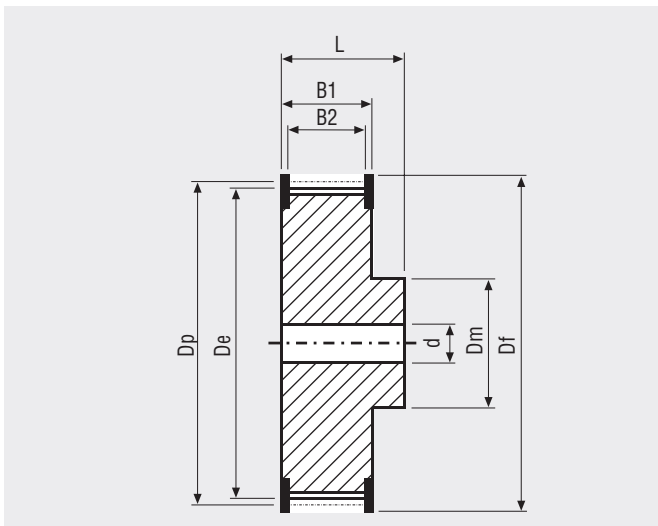

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 18 | 114,59 | 111,73 | 32 | 203,72 | 200,86 |
| 20 | 127,32 | 124,47 | 36 | 229,18 | 226,33 |
| 22 | 140,06 | 137,20 | 40 | 254,65 | 251,80 |
| 24 | 152,79 | 149,93 | 48 | 305,58 | 302,73 |
| 25 | 159,15 | 156,30 | 60 | 381,97 | 379,12 |
| 30 | 190,99 | 188,13 | | | |

MEGALINEAR MTD3 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 20 | 25 | 50 |
|----------------------|----|----|----|-----|
| Weight (gr/m) | 20 | 45 | 60 | 115 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,3 mm**

Standard thickness: **2,2 +/- 0,15 mm**

Standard length tolerance: **+/- 0,5 mm/m**

Standard roll length: **100 m**


Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth
- Antistatic nylon fabric
- Transparent FDA compound



Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

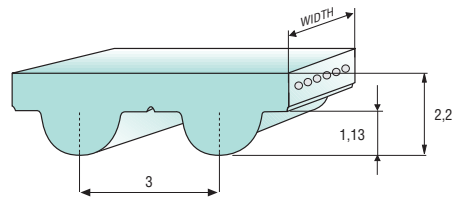

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 23 | 23 | 22 | 22 | 22 | 22 | 21 | 20 | 20 | 19 | 18 | 17 | 16 | 15 | 13 | 12 | 11 | 9 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 20 | 25 | 50 |
|-----------------|--------------------------|------|------|------|------|
| Steel | Max Traction Load (N) | 410 | 820 | 1065 | 2170 |
| | Breaking Strength (N) | 1640 | 3280 | 4260 | 8690 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

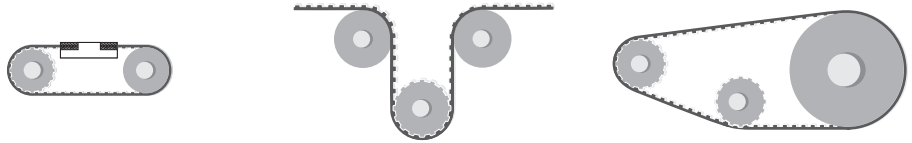


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 20 | 20 | 30 | 20 | 30 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

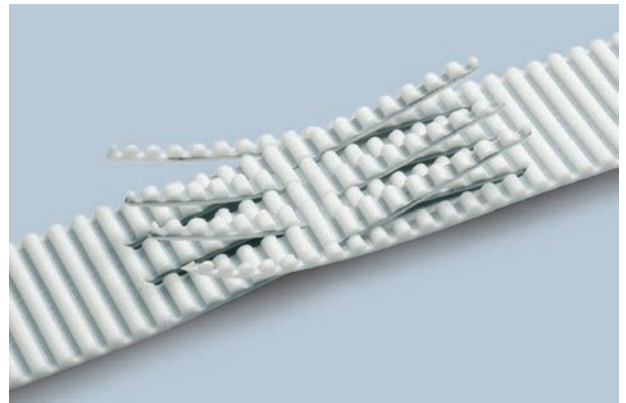

PULLEYS (for more details please see our pulleys catalogue)

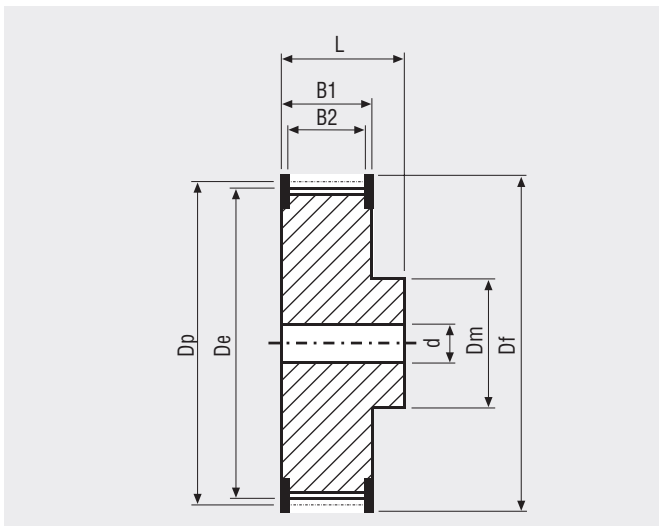


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 20 | 19,10 | 18,34 | 32 | 30,56 | 29,80 |
| 21 | 20,05 | 19,29 | 36 | 34,38 | 33,62 |
| 22 | 21,01 | 20,25 | 40 | 38,20 | 37,44 |
| 24 | 22,92 | 22,16 | 44 | 42,02 | 41,25 |
| 26 | 24,83 | 24,07 | 48 | 45,84 | 45,07 |
| 28 | 26,74 | 25,98 | 60 | 57,30 | 56,53 |
| 30 | 28,65 | 27,89 | 72 | 68,75 | 67,99 |

MEGALINEAR MTD5 OPEN-END

BELT CHARACTERISTICS


| STANDARD WIDTHS (mm) | 10 | 15 | 25 | 50 |
|----------------------|----|----|----|-----|
| Weight (gr/m) | 35 | 50 | 80 | 165 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **3,6 +/- 0,2 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Cleats

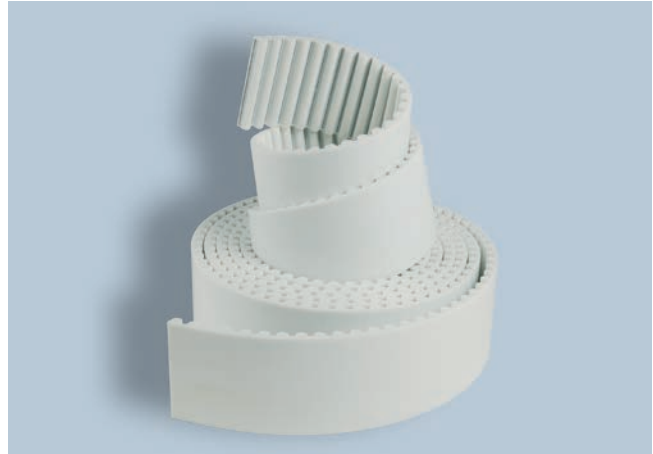

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

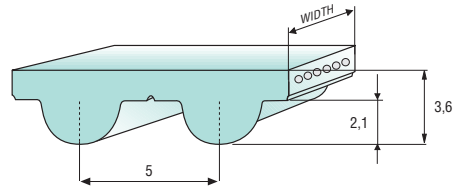

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| F _{p spec} (N/cm) | 34 | 34 | 33 | 33 | 33 | 32 | 31 | 30 | 29 | 28 | 26 | 25 | 23 | 21 | 19 | 17 | 16 | 13 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 15 | 25 | 50 |
|-----------------|--------------------------|------|------|------|-------|
| Steel | Max Traction Load (N) | 670 | 1005 | 1805 | 3750 |
| | Breaking Strength (N) | 2680 | 4020 | 7235 | 15005 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 665 | 995 | 1795 | 3720 |
| | Breaking Strength (N) | 2660 | 3990 | 7180 | 14895 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 520 | 780 | 1410 | - |
| | Breaking Strength (N) | 2090 | 3135 | 5640 | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - |

Average values


FLEXION RESISTANCE

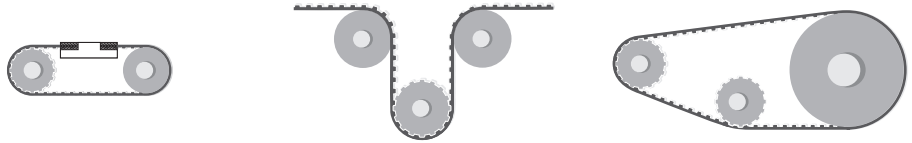


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 16 | 16 | 50 | 16 | 25 |
| Kevlar cords | 16 | 16 | 50 | 16 | 25 |
| Stainless steel cords | 18 | 20 | 65 | 18 | 65 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

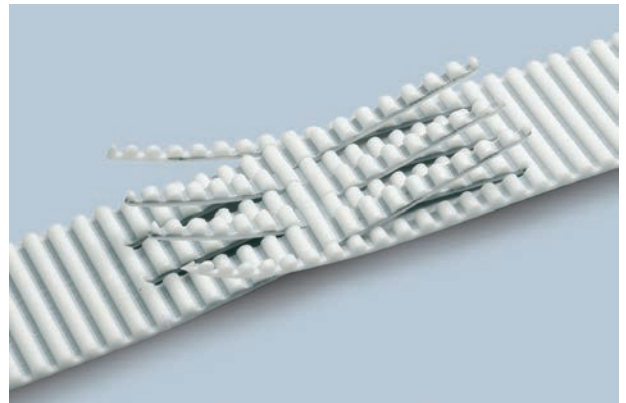

PULLEYS (for more details please see our pulleys catalogue)

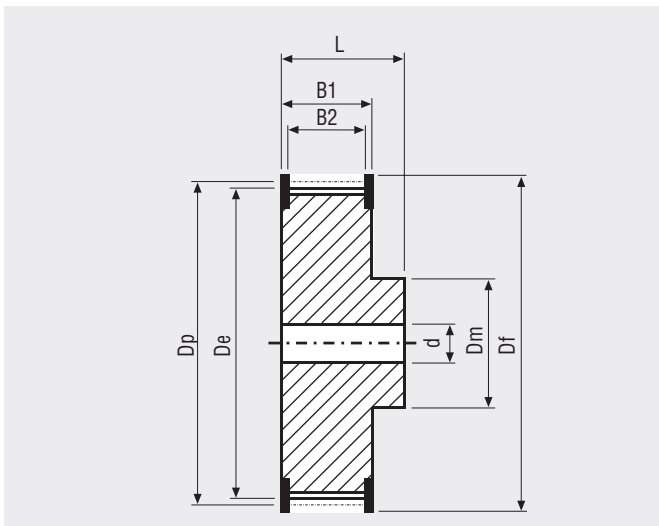


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 16 | 25,46 | 24,32 | 30 | 47,75 | 46,60 |
| 18 | 28,65 | 27,50 | 32 | 50,93 | 49,79 |
| 20 | 31,83 | 30,69 | 36 | 57,30 | 56,15 |
| 21 | 33,42 | 32,28 | 40 | 63,66 | 62,52 |
| 22 | 35,01 | 33,87 | 44 | 70,03 | 68,89 |
| 24 | 38,20 | 37,05 | 48 | 76,39 | 75,25 |
| 26 | 41,38 | 40,24 | 60 | 95,49 | 94,35 |
| 28 | 44,56 | 43,42 | 72 | 114,59 | 113,45 |

MEGALINEAR MTD8 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 15 | 20 | 30 | 50 | 85 | 100 |
|----------------------|----|----|-----|-----|-----|-----|-----|
| Weight (gr/m) | 65 | 85 | 120 | 185 | 325 | 530 | 650 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard thickness: **5,6 +/- 0,3 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

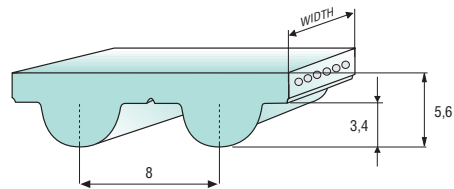

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 67 | 66 | 65 | 64 | 63 | 63 | 59 | 57 | 54 | 52 | 48 | 45 | 40 | 37 | 31 | 28 | 24 | 18 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 15 | 20 | 30 | 50 | 85 | 100 |
|-----------------|--------------------------|------|------|-------|-------|-------|-------|-------|
| HP = Standard | Max Traction Load (N) | 1425 | 2135 | 3085 | 4750 | 8075 | 14750 | 17500 |
| | Breaking Strength (N) | 5700 | 8550 | 12350 | 19000 | 32300 | 56050 | 66500 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 765 | 1150 | 1535 | 2565 | 4360 | 7965 | 9450 |
| | Breaking Strength (N) | 3075 | 4615 | 6155 | 10260 | 17440 | 30265 | 35910 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HF | Max Traction Load (N) | 840 | 1365 | 1890 | 2940 | 5040 | 9170 | 10830 |
| | Breaking Strength (N) | 3360 | 5460 | 7560 | 11760 | 20160 | 34860 | 41160 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Stainless | Max Traction Load (N) | 1075 | 1610 | 2330 | 3585 | 6095 | - | - |
| | Breaking Strength (N) | 4300 | 6455 | 9320 | 14345 | 24385 | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | 3,8 | 3,8 | - | - |

Average values


FLEXION RESISTANCE

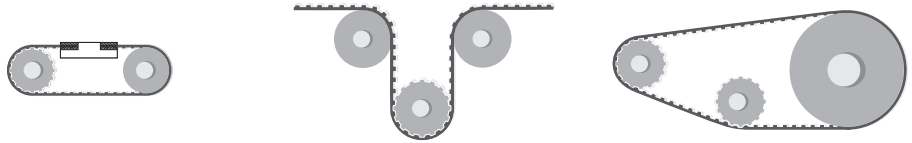


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|------------------------|-----------|-----------|--------------------|-----------|--------------------|
| HP = Standard | 20 | 22 | 100 | 20 | 50 |
| Kevlar cords | 20 | 22 | 100 | 20 | 50 |
| High Flexibility cords | 20 | 20 | 80 | 20 | 40 |
| Stainless steel cords | 24 | 28 | 110 | 24 | 80 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

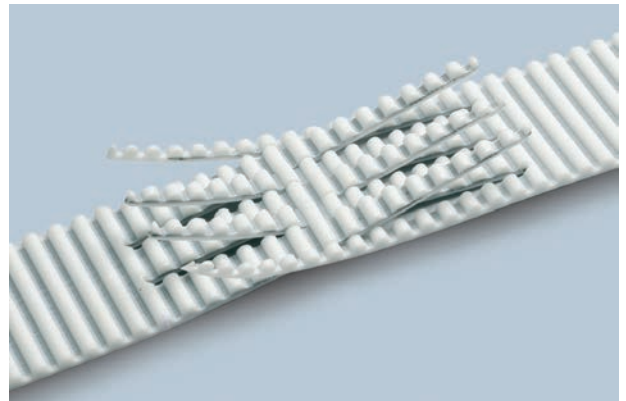

PULLEYS (for more details please see our pulleys catalogue)

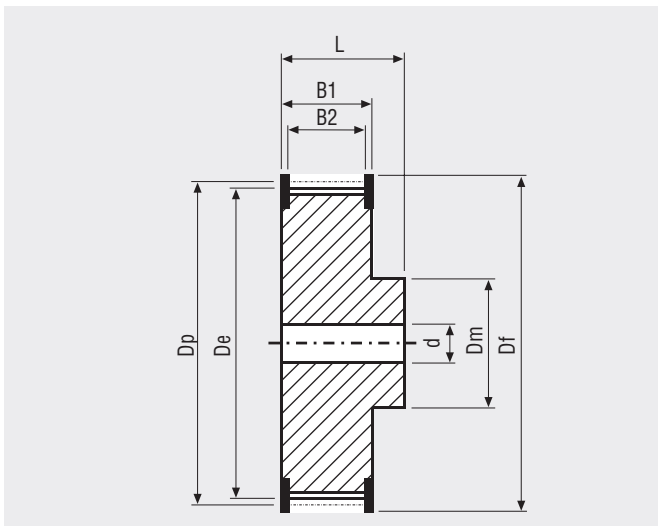


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 20 | 50,95 | 49,58 | 44 | 112,05 | 110,67 |
| 22 | 56,02 | 54,65 | 48 | 122,23 | 120,86 |
| 24 | 61,12 | 59,75 | 56 | 142,60 | 141,23 |
| 26 | 66,21 | 64,84 | 64 | 162,97 | 161,60 |
| 28 | 71,30 | 70,08 | 72 | 183,35 | 181,97 |
| 30 | 76,39 | 75,13 | 80 | 203,72 | 202,35 |
| 32 | 81,49 | 80,16 | 90 | 229,18 | 227,81 |
| 34 | 86,58 | 85,22 | 112 | 285,21 | 283,83 |
| 36 | 91,67 | 90,30 | 144 | 366,69 | 365,32 |
| 38 | 96,77 | 95,39 | 168 | 427,81 | 426,44 |
| 40 | 101,86 | 100,49 | 192 | 488,92 | 487,55 |

MEGALINEAR MTD14 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 | 40 | 55 | 85 | 100 | 115 |
|----------------------|-----|-----|-----|-----|------|------|
| Weight (gr/m) | 260 | 400 | 555 | 850 | 1000 | 1150 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard thickness: **10 +/- 0,45 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

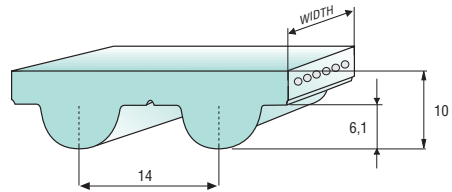

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 115 | 113 | 111 | 109 | 108 | 106 | 99 | 93 | 88 | 84 | 76 | 69 | 60 | 52 | 46 | 34 | 28 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 | 40 | 55 | 85 | 100 | 115 |
|-----------------|--------------------------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 5190 | 8650 | 12745 | 20485 | 24580 | 30150 |
| | Breaking Strength (N) | 20760 | 34600 | 48440 | 77850 | 93420 | 105530 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 4215 | 7030 | 10360 | 16650 | 19980 | 24500 |
| | Breaking Strength (N) | 16870 | 28120 | 39365 | 63270 | 75920 | 85765 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 |

Average values


FLEXION RESISTANCE

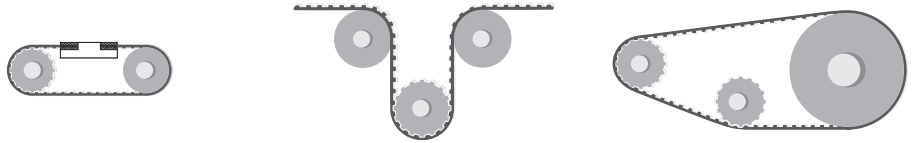


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 26 | 28 | 180 | 26 | 120 |
| Kevlar cords | 26 | 28 | 180 | 26 | 120 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

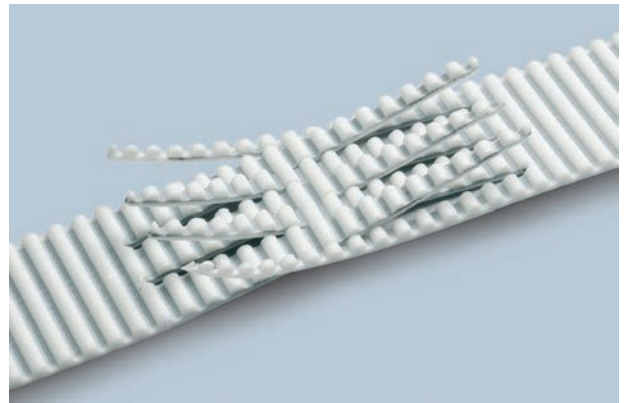

PULLEYS (for more details please see our pulleys catalogue)

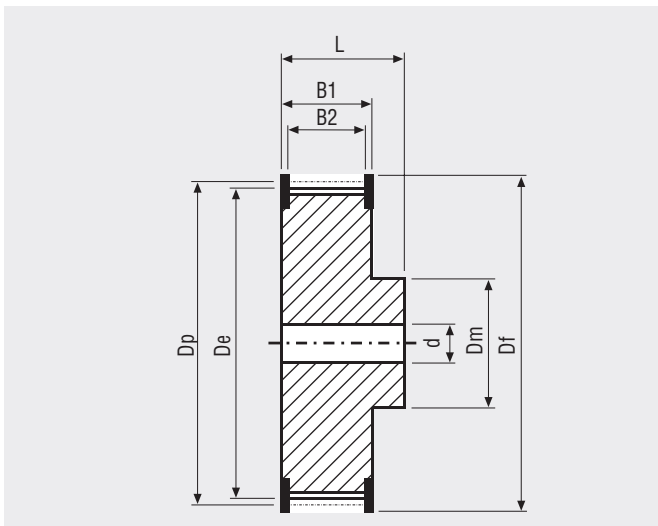

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 26 | 115,92 | 113,13 | 56 | 249,55 | 246,76 |
| 28 | 124,78 | 121,98 | 64 | 285,21 | 282,41 |
| 29 | 129,23 | 126,44 | 72 | 320,86 | 318,06 |
| 30 | 133,69 | 130,90 | 80 | 356,51 | 353,71 |
| 32 | 142,60 | 139,81 | 90 | 401,07 | 398,28 |
| 34 | 151,51 | 148,72 | 112 | 499,11 | 496,32 |
| 36 | 160,43 | 157,68 | 144 | 641,71 | 638,92 |
| 38 | 169,34 | 166,60 | 168 | 748,66 | 745,87 |
| 40 | 178,25 | 175,49 | 192 | 855,62 | 852,82 |
| 44 | 196,08 | 193,28 | 216 | 962,57 | 959,76 |
| 48 | 213,90 | 211,11 | | | |

MEGALINEAR RPP5 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 15 | 25 | 30 | 50 | 75 |
|----------------------|----|----|-----|-----|-----|-----|
| Weight (gr/m) | 40 | 60 | 100 | 120 | 195 | 292 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **nylon fabric (NFT)**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**

Standard thickness: **3,8 +/- 0,2 mm**


Standard length tolerance: **+/- 0,8 mm/m**

HP cord length tolerance: **+0/- 0,8 mm/m**

Standard roll length: **100 m**


Belt options on request with minimum quantity:

- Nylon fabric back
- Antistatic nylon fabric
- AVAFc 60/70/85 ShA
- APL
- Cleats

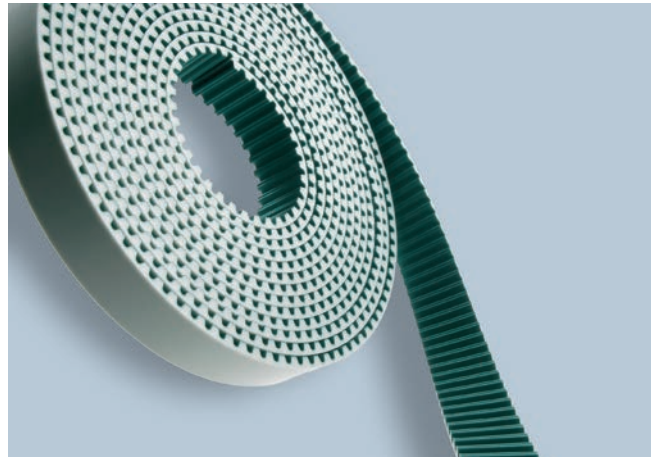

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

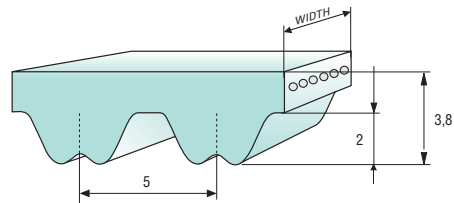

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 37 | 36 | 36 | 36 | 35 | 35 | 33 | 32 | 30 | 30 | 27 | 26 | 24 | 23 | 21 | 19 | 18 | 15 |


Minimum suggested number of teeth in clamp for linear movement: 7 - HP cords minimum suggested number of teeth in clamp 10

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 15 | 25 | 30 | 50 | 75 |
|-----------------|--------------------------|------|------|------|-------|-------|-------|
| Steel | Max Traction Load (N) | 670 | 1005 | 1805 | 2210 | 3750 | 6065 |
| | Breaking Strength (N) | 2680 | 4020 | 7235 | 8840 | 15005 | 23045 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 665 | 995 | 1795 | 2190 | 3720 | - |
| | Breaking Strength (N) | 2660 | 3990 | 7180 | 8775 | 14895 | - |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | - |
| Stainless | Max Traction Load (N) | 520 | 780 | 1410 | - | - | - |
| | Breaking Strength (N) | 2090 | 3135 | 5640 | - | - | - |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - | - | - |
| HP | Max Traction Load (N) | 840 | 1365 | 2415 | 2940 | 5040 | 8065 |
| | Breaking Strength (N) | 3360 | 5460 | 9660 | 11760 | 20160 | 30660 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

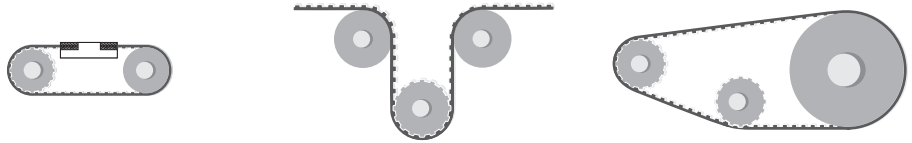


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 15 | 16 | 60 | 15 | 20 |
| Kevlar cords | 15 | 16 | 60 | 15 | 20 |
| Stainless steel cords | 18 | 18 | 65 | 18 | 65 |
| High power cords | 20 | 22 | 60 | 20 | 40 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

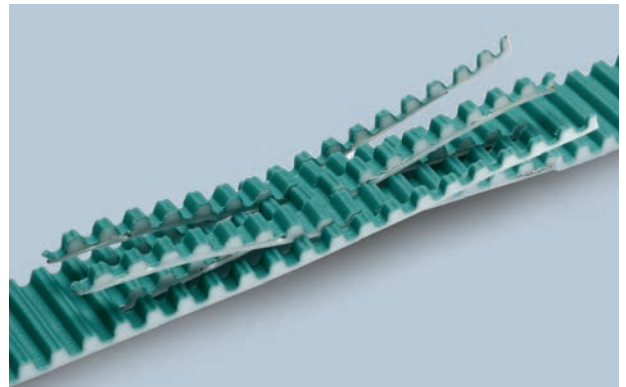

PULLEYS (for more details please see our pulleys catalogue)

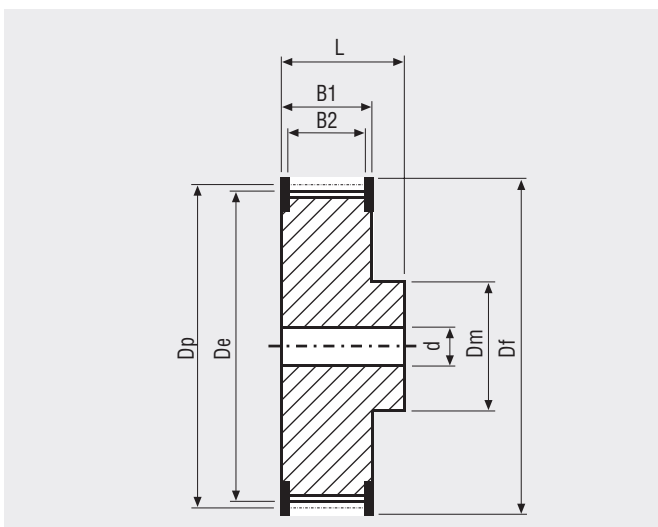

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 15 | 23,87 | 22,73 | 30 | 47,75 | 46,60 |
| 16 | 25,46 | 24,32 | 32 | 50,93 | 49,79 |
| 18 | 28,65 | 27,50 | 36 | 57,30 | 56,15 |
| 20 | 31,83 | 30,69 | 40 | 63,66 | 62,52 |
| 21 | 33,42 | 32,28 | 44 | 70,03 | 68,89 |
| 22 | 35,01 | 33,87 | 48 | 76,39 | 75,25 |
| 24 | 38,20 | 37,05 | 60 | 95,49 | 94,35 |
| 26 | 41,38 | 40,24 | 72 | 114,59 | 113,45 |
| 28 | 44,56 | 43,42 | | | |

MEGALINEAR RPP8 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 15 | 20 | 30 | 50 | 85 | 100 |
|----------------------|----|-----|-----|-----|-----|-----|-----|
| Weight (gr/m) | 65 | 100 | 130 | 195 | 330 | 560 | 655 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **nylon fabric (NFT)**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**

Standard thickness: **5,4 +/- 0,3 mm**



Standard length tolerance: **+/- 0,8 mm/m**

HP cord length tolerance: **+0/- 0,8 mm/m**

Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Antistatic nylon fabric
- AVAFc 60/70/85 ShA
- APL
- Fishbone
- Ribbed
- Cleats

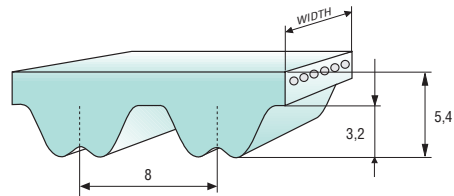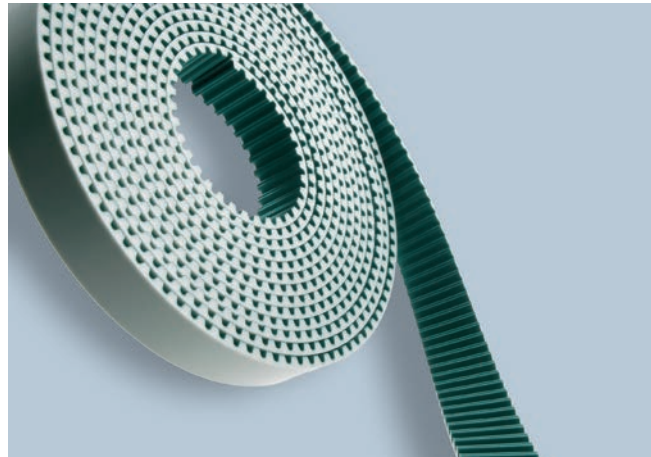

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 76 | 75 | 74 | 73 | 72 | 71 | 65 | 62 | 60 | 57 | 53 | 50 | 45 | 42 | 38 | 35 | 32 | 25 |


Minimum suggested number of teeth in clamp for linear movement: 7- HP cords minimum suggested number of teeth in clamp 10

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 15 | 20 | 30 | 50 | 85 | 100 |
|-----------------|--------------------------|------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 1425 | 2135 | 3085 | 4750 | 8075 | 14750 | 17500 |
| | Breaking Strength (N) | 5700 | 8550 | 12350 | 19000 | 32300 | 56050 | 66500 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 1110 | 1665 | 2405 | 3705 | 6295 | 11505 | 13650 |
| | Breaking Strength (N) | 4445 | 6665 | 9630 | 14820 | 25190 | 43715 | 51870 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | 2160 | 3460 | 4755 | 7785 | 12975 | 24125 | 27770 |
| | Breaking Strength (N) | 8650 | 13840 | 19030 | 31140 | 51900 | 91690 | 105530 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

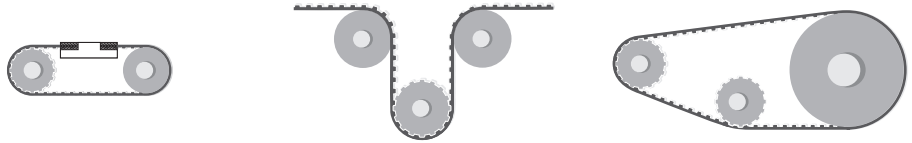

| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 18 | 20 | 100 | 18 | 45 |
| Kevlar cords | 18 | 20 | 100 | 18 | 45 |
| High power cords | 30 | 34 | 180 | 30 | 60 |


JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

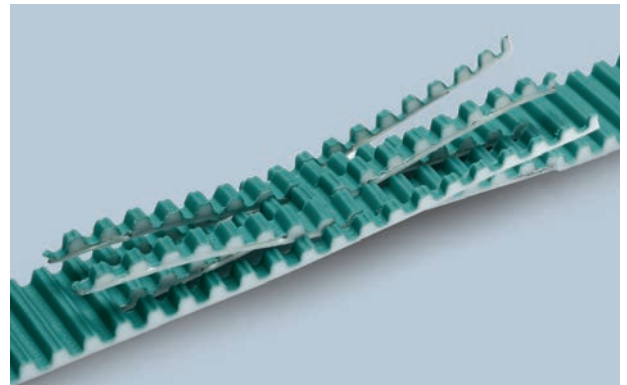

PULLEYS (HP belts can't work on RPP or MTD standard pulleys, a special profile is required. Please contact Megadyne staff for more information)

SPECIAL SHAPE IS REQUIRED

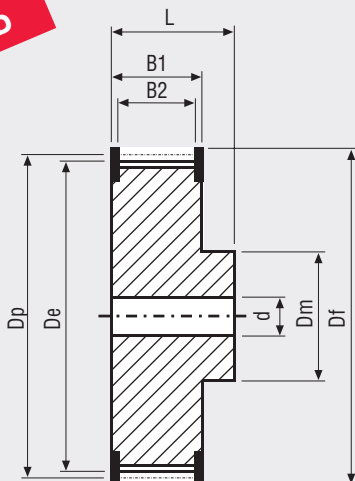



| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 18 | 45,86 | 44,49 | 44 | 112,04 | 110,67 |
| 22 | 56,02 | 54,65 | 48 | 122,23 | 120,86 |
| 24 | 61,12 | 59,74 | 54 | 137,51 | 136,14 |
| 26 | 66,21 | 64,84 | 64 | 162,97 | 161,60 |
| 28 | 71,30 | 69,93 | 72 | 183,35 | 181,97 |
| 30 | 76,39 | 75,02 | 80 | 203,72 | 202,35 |
| 32 | 81,49 | 80,12 | 90 | 229,18 | 227,81 |
| 34 | 86,58 | 85,21 | 112 | 285,20 | 283,83 |
| 36 | 91,67 | 90,30 | 144 | 366,69 | 365,32 |
| 38 | 96,77 | 95,39 | 168 | 427,81 | 426,44 |
| 40 | 101,86 | 100,49 | 192 | 488,92 | 487,55 |

MEGALINEAR RPP14 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 40 | 55 | 85 | 115 | 150 |
|----------------------|-----|-----|------|------|------|
| Weight (gr/m) | 505 | 610 | 1080 | 1465 | 1958 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **nylon fabric (NFT)**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard thickness: **10 +/- 0,4 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Antistatic nylon fabric
 - AVAFC 60/70/85 ShA
 - APL
 - Fishbone
 - Ribbed
 - Cleats

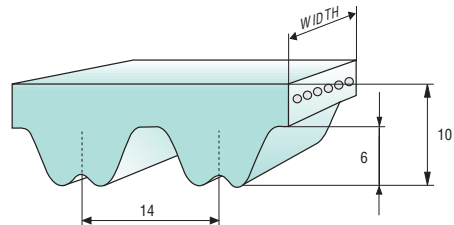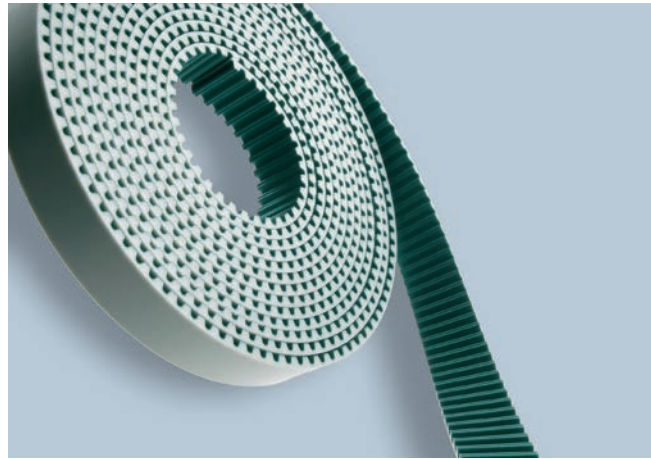

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 140 | 137 | 135 | 133 | 131 | 128 | 118 | 111 | 105 | 101 | 91 | 84 | 75 | 62 | 52 | 40 | 30 |


Minimum suggested number of teeth in clamp for linear movement: 8

TRACTION RESISTANCE

| Belt width (mm) | | 40 | 55 | 85 | 115 | 150 |
|-----------------|--------------------------|-------|-------|--------|--------|--------|
| Steel | Max Traction Load (N) | 15200 | 22000 | 35000 | 51025 | 67310 |
| | Breaking Strength (N) | 60800 | 83600 | 133000 | 178600 | 235600 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

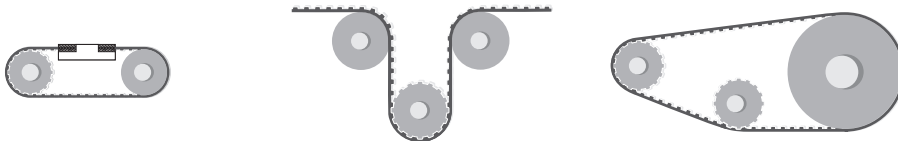


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 32 | 34 | 250 | 32 | 145 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

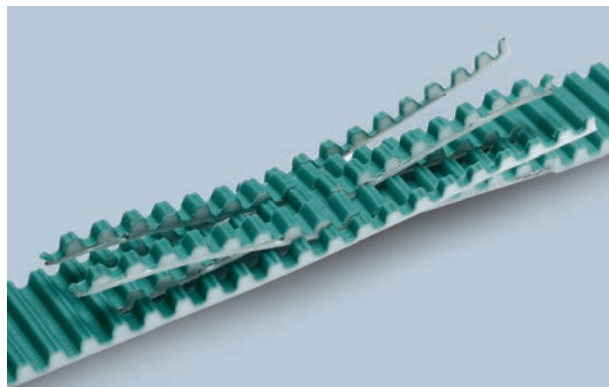

PULLEYS (for more details please see our pulleys catalogue)

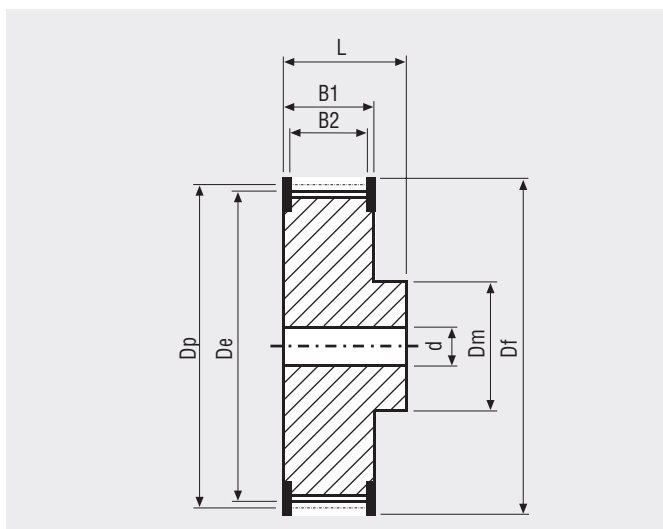


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 32 | 142,60 | 139,81 | 72 | 320,86 | 318,07 |
| 34 | 151,52 | 148,73 | 80 | 356,51 | 353,72 |
| 36 | 160,43 | 157,64 | 90 | 401,07 | 398,28 |
| 38 | 169,34 | 166,55 | 112 | 499,11 | 496,32 |
| 40 | 178,25 | 175,46 | 144 | 641,71 | 638,92 |
| 44 | 196,08 | 193,29 | 168 | 748,66 | 745,87 |
| 48 | 213,90 | 211,11 | 192 | 855,61 | 852,82 |
| 56 | 249,55 | 246,76 | 216 | 962,57 | 959,78 |
| 64 | 285,20 | 282,41 | | | |

MEGALINEAR RPP14XHP OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 40 | 55 | 85 | 115 | 150 |
|----------------------|-----|-----|------|------|------|
| Weight (gr/m) | 640 | 900 | 1380 | 1890 | 2485 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **nylon fabric (NFT)**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **+/- 1 mm**
 Standard thickness: **10,2 +/- 0,5 mm**
 Standard length tolerance: **-0,4/-1,2 mm/m**
 Standard roll length: **100 m**

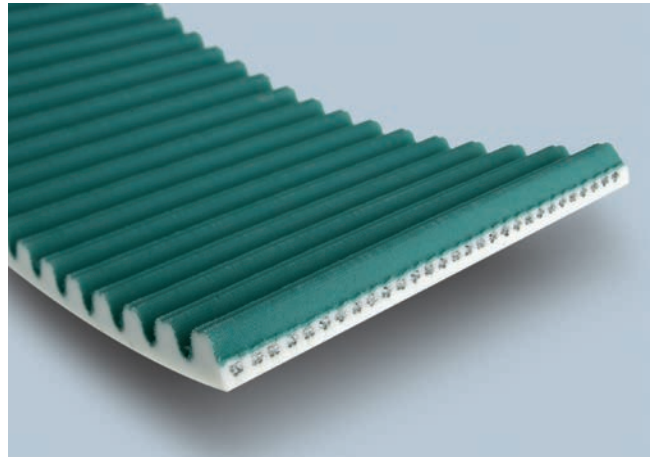

TOOTH PROFILE ACCORDING ISO 13050

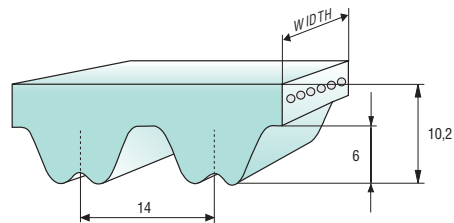

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $F_{p\ spec}$ (N/cm) | 140 | 137 | 135 | 133 | 131 | 128 | 118 | 111 | 105 | 101 | 91 | 84 | 75 | 62 | 52 | 40 | 30 |



Minimum suggested number of teeth in clamp for linear movement: 12

TRACTION RESISTANCE

| Belt width (mm) | | 40 | 55 | 85 | 115 | 150 |
|-----------------|--------------------------|-------|--------|--------|--------|--------|
| Steel | Max Traction Load (N) | 19800 | 30316 | 47365 | 69940 | 92570 |
| | Breaking Strength (N) | 79200 | 115200 | 180000 | 244800 | 324000 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 |

Average values

FLEXION RESISTANCE

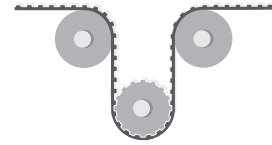


| | Z_{min} | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|
| Standard steel cords | 32 | 34 | 250 |

TYPICAL BELT APPLICATION



PULLEYS (XHP belts can't work on RPP or HTD standard pulleys, a special profile is required. PLS contact Megadyne staff for more information)

SPECIAL SHAPE IS REQUIRED

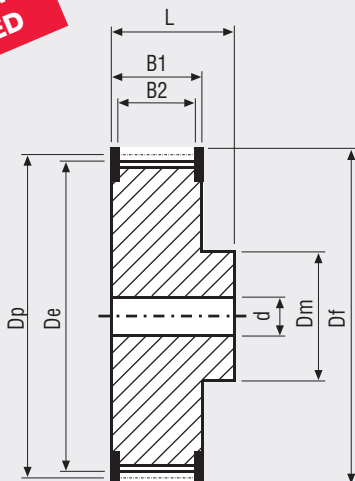

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 32 | 142,60 | 139,81 | 72 | 320,86 | 318,07 |
| 34 | 151,52 | 148,73 | 80 | 356,51 | 353,72 |
| 36 | 160,43 | 157,64 | 90 | 401,07 | 398,28 |
| 38 | 169,34 | 166,55 | 112 | 499,11 | 496,32 |
| 40 | 178,25 | 175,46 | 144 | 641,71 | 638,92 |
| 44 | 196,08 | 193,29 | 168 | 748,66 | 745,87 |
| 48 | 213,90 | 211,11 | 192 | 855,61 | 852,82 |
| 56 | 249,55 | 246,76 | 216 | 962,57 | 959,78 |
| 64 | 285,20 | 282,41 | | | |

MEGALINEAR STD5 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 15 | 25 | 50 |
|----------------------|----|----|----|-----|
| Weight (gr/m) | 35 | 50 | 80 | 165 |

Standard compound: **black Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **antistatic nylon fabric (NFT)**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**


Standard thickness: **3,4 +/- 0,25 mm**

Standard length tolerance: **+/- 0,8 mm/m**

Standard roll length: **100 m**


Belt options on request with minimum quantity:

- Nylon fabric back
- AVAFC 60/70/85 ShA
- APL
- Cleats

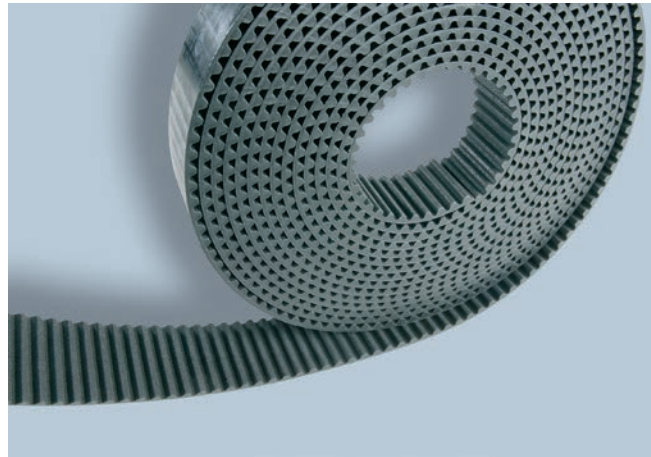

Different back coating materials see page 116

TOOTH PROFILE ACCORDING ISO 13050

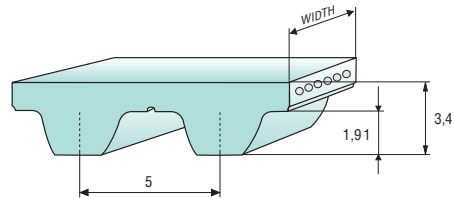

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------|----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 34 | 34 | 33 | 32 | 31 | 30 | 29 | 27 | 25 | 24 | 22 | 20 | 17 | 15 | 12 | 10 | 8 | 3 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 15 | 25 | 50 |
|-----------------|--------------------------|------|------|------|-------|
| Steel | Max Traction Load (N) | 670 | 1005 | 1805 | 3750 |
| | Breaking Strength (N) | 2680 | 4020 | 7235 | 15005 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 |

Average values

FLEXION RESISTANCE

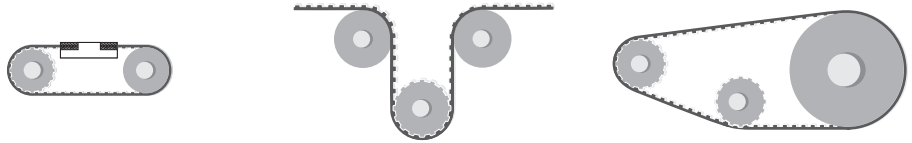


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 12 | 13 | 60 | 12 | 20 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116



PULLEYS (for more details please see our pulleys catalogue)

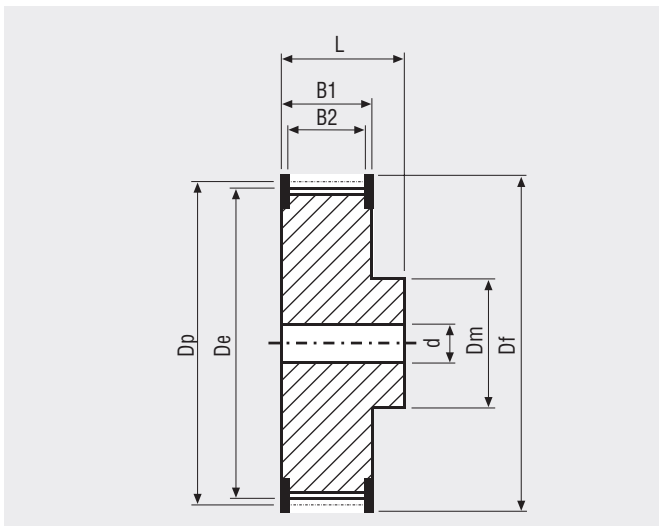

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 12 | 19,10 | 18,14 | 28 | 44,58 | 43,60 |
| 14 | 22,29 | 21,32 | 30 | 47,77 | 46,79 |
| 15 | 23,88 | 22,91 | 32 | 50,95 | 49,79 |
| 16 | 25,47 | 24,50 | 36 | 57,32 | 56,34 |
| 18 | 28,66 | 27,69 | 40 | 63,69 | 62,70 |
| 20 | 31,84 | 30,87 | 44 | 70,06 | 69,07 |
| 22 | 35,03 | 34,05 | 48 | 76,43 | 75,43 |
| 24 | 38,21 | 37,24 | 60 | 95,54 | 94,53 |
| 26 | 41,40 | 40,42 | 72 | 114,64 | 113,63 |

MEGALINEAR STD8 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 10 | 12 | 15 | 20 | 30 | 50 | 85 |
|----------------------|----|----|----|-----|-----|-----|-----|
| Weight (gr/m) | 65 | 75 | 85 | 120 | 185 | 325 | 530 |

Standard compound: **black Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **antistatic nylon fabric (NFT)**

Standard cords: **S and Z torsion zinked steel**

Standard width tolerance: **+/- 0,5 mm**


Standard thickness: **5,1 +/- 0,25 mm**

Standard length tolerance: **+/- 0,8 mm/m**


Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- AVAFC 60/70/85 ShA
- APL
- Fishbone
- Ribbed
- Cleats

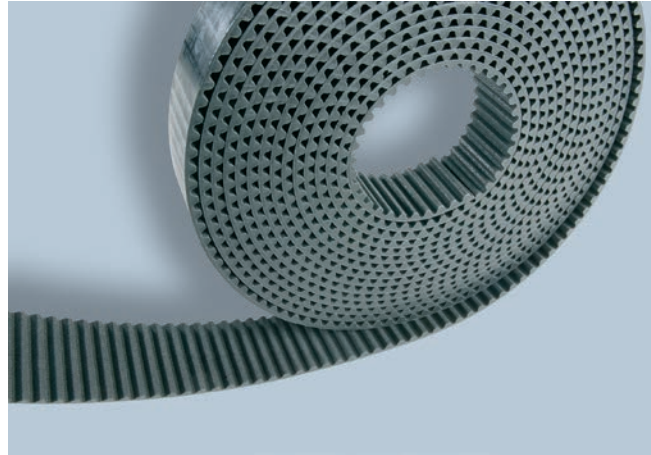

Different back coating materials see page 116

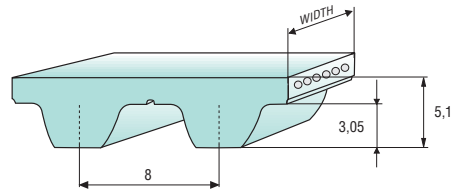

TOOTH PROFILE ACCORDING ISO 13050

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 64 | 62 | 58 | 56 | 54 | 51 | 48 | 46 | 44 | 42 | 38 | 35 | 31 | 27 | 23 | 20 | 17 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 10 | 12 | 15 | 20 | 30 | 50 | 85 |
|-----------------|--------------------------|------|------|------|-------|-------|-------|-------|
| HP = Standard | Max Traction Load (N) | 1425 | 1660 | 2135 | 3085 | 4750 | 8075 | 14750 |
| | Breaking Strength (N) | 5700 | 6650 | 8550 | 12350 | 19000 | 32300 | 56050 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 1110 | 1295 | 1665 | 2405 | 3705 | 6295 | 11505 |
| | Breaking Strength (N) | 4445 | 5185 | 6665 | 9630 | 14820 | 25190 | 43715 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HF | Max Traction Load (N) | 840 | 1050 | 1365 | 1890 | 2940 | 5040 | 9170 |
| | Breaking Strength (N) | 3360 | 4200 | 5460 | 7560 | 11760 | 20160 | 34860 |
| | Elongation at MTL (mm/m) | 5 | 5 | 5 | 5 | 5 | 5 | 5 |

Average values


FLEXION RESISTANCE

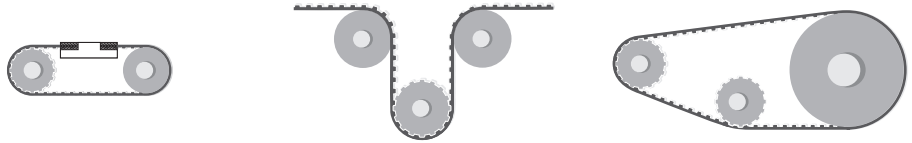


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|------------------------|-----------|-----------|--------------------|-----------|--------------------|
| HP = standard | 20 | 24 | 100 | 20 | 50 |
| Kevlar cords | 20 | 24 | 100 | 20 | 50 |
| High Flexibility cords | 16 | 24 | 60 | 22 | 40 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, AVAFC and APL can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

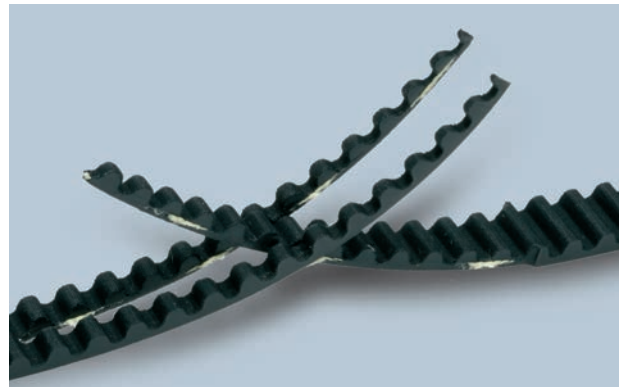

PULLEYS (for more details please see our pulleys catalogue)

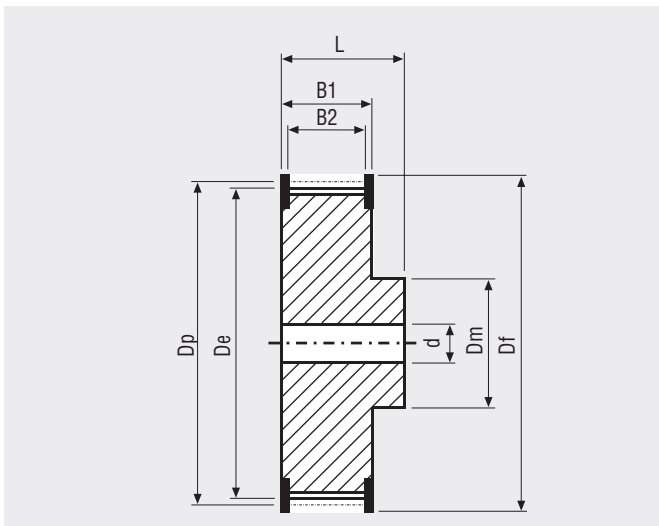

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 22 | 56,05 | 54,65 | 48 | 122,29 | 120,86 |
| 24 | 61,14 | 59,75 | 56 | 142,67 | 141,23 |
| 26 | 66,24 | 64,84 | 64 | 163,05 | 161,60 |
| 28 | 71,33 | 69,93 | 72 | 183,43 | 181,98 |
| 30 | 76,43 | 75,02 | 80 | 203,82 | 202,35 |
| 32 | 81,52 | 80,12 | 90 | 229,29 | 227,81 |
| 34 | 86,62 | 85,21 | 112 | 285,35 | 283,84 |
| 36 | 91,71 | 90,30 | 144 | 366,87 | 365,32 |
| 38 | 96,81 | 95,40 | 168 | 428,02 | 426,44 |
| 40 | 101,91 | 100,49 | 192 | 489,17 | 487,55 |
| 44 | 112,10 | 110,68 | | | |

MEGALINEAR HG OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (inch) | 150 | 200 | 300 | 400 | 600 |
|------------------------|------|------|------|-------|-------|
| STANDARD WIDTHS (mm) | 38,1 | 50,8 | 76,2 | 101,6 | 152,4 |
| Weight (gr/m) | 230 | 285 | 395 | 500 | 800 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**

Standard back cover: **none**

Standard tooth cover: **none**

Standard cords: **S and Z torsion zinked steel**


Standard width tolerance: **+/- 0,5 mm**

Standard length tolerance: **+/- 0,8 mm/m**


Standard roll length: **100 m**

Belt options on request with minimum quantity:

- Nylon fabric back
- Nylon fabric teeth*
- Antistatic nylon fabric
- Transparent FDA compound
- Cleats

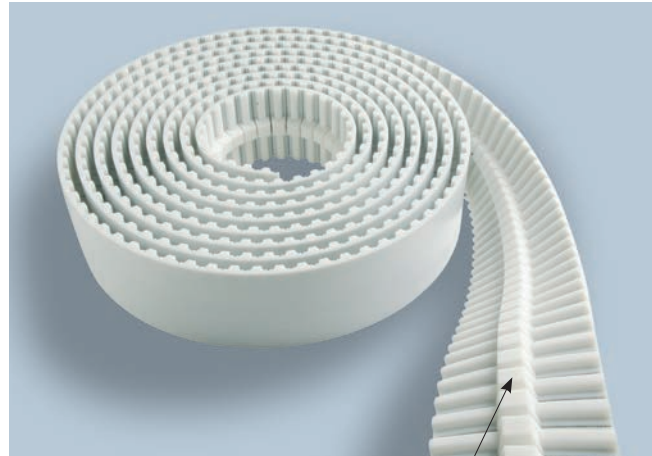

notched guide

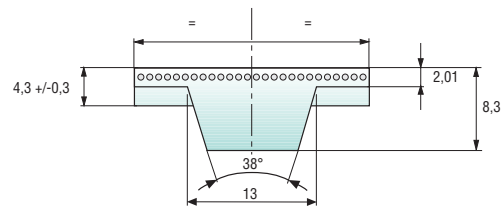

Different back coating materials see page 116

* Nylon fabric teeth including guide (fabric on complete width) is standard version.
 Nylon fabric teeth excluding guide (2 fabric strips on teeth only) is only on request.

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| F _{p spec} (N/cm) | 44 | 43 | 42 | 41 | 40 | 39 | 36 | 34 | 33 | 31 | 29 | 27 | 24 | 22 | 19 | 17 | 16 | 12 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (inch) | | 150 | 200 | 300 | 400 | 600 |
|-------------------|--------------------------|-------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 3675 | 5040 | 8065 | 11760 | 11520 |
| | Breaking Strength (N) | 14700 | 20160 | 30660 | 41160 | 40320 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 3205 | 4360 | 7015 | 10260 | 14360 |
| | Breaking Strength (N) | 12825 | 17440 | 26675 | 35910 | 50270 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 |

Average values


FLEXION RESISTANCE

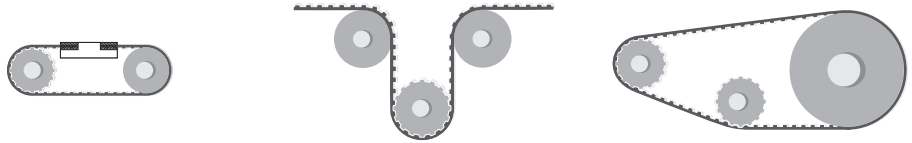


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 20 | 22 | 160 | 20 | 80 |
| Kevlar cords | 20 | 22 | 160 | 20 | 80 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

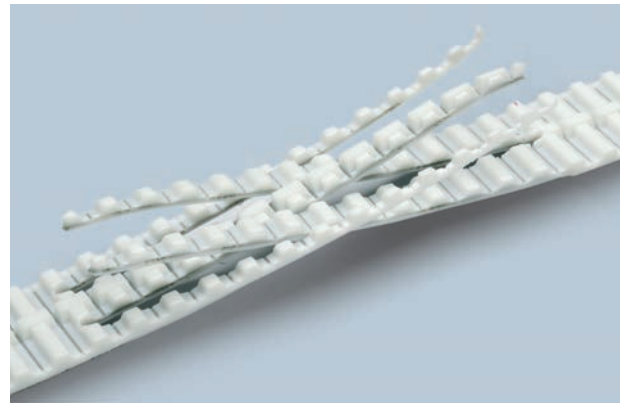

PULLEYS (for more details please see our pulleys catalogue)

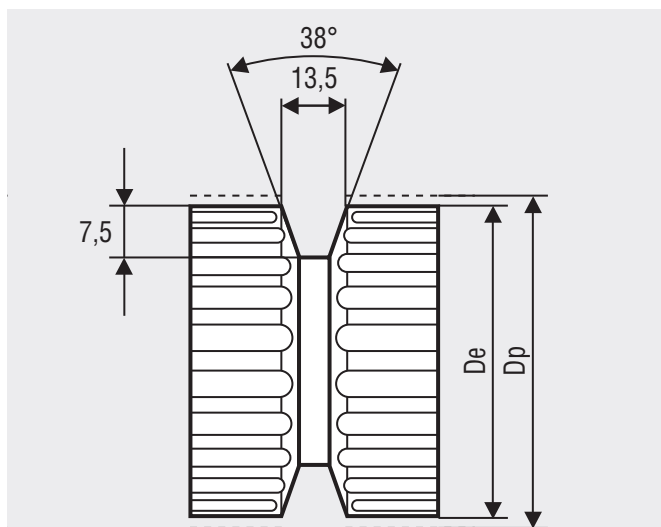

| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 20 | 80,85 | 79,48 | 34 | 137,45 | 136,08 |
| 22 | 88,94 | 87,57 | 36 | 145,53 | 144,16 |
| 24 | 97,02 | 95,65 | 38 | 153,62 | 152,25 |
| 26 | 105,11 | 103,74 | 40 | 161,70 | 160,33 |
| 28 | 113,19 | 111,82 | 44 | 177,87 | 176,50 |
| 30 | 121,28 | 119,91 | 48 | 194,04 | 192,67 |
| 32 | 129,36 | 127,99 | 60 | 242,55 | 241,18 |

MEGALINEAR TG5 OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 | 32 | 50 |
|----------------------|----|----|-----|
| Weight (gr/m) | 70 | 85 | 120 |


- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - Cleats

Different back coating materials see page 116

* Nylon fabric teeth excluding guide (2 fabric strips on teeth only).

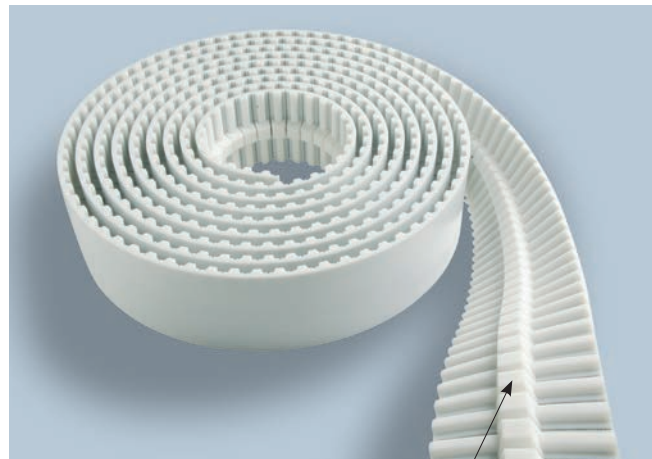

notched guide

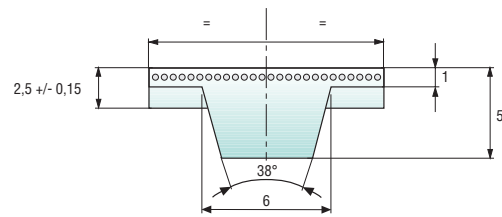

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 24 | 23 | 23 | 22 | 22 | 22 | 20 | 19 | 19 | 18 | 17 | 16 | 15 | 14 | 12 | 11 | 11 | 9 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 | 32 | 50 |
|-----------------|--------------------------|------|------|-------|
| Steel | Max Traction Load (N) | 840 | 1060 | 1750 |
| | Breaking Strength (N) | 3375 | 4250 | 7000 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 1795 | 2260 | 3720 |
| | Breaking Strength (N) | 7180 | 9040 | 14895 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 |

Average values


FLEXION RESISTANCE

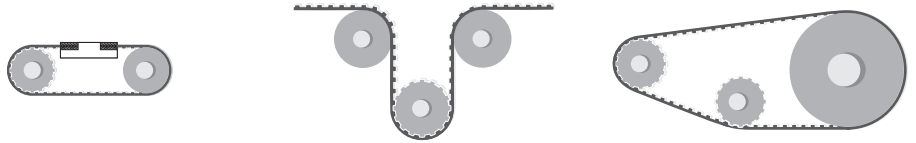


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 25 | 28 | 80 | 25 | 60 |
| Kevlar cords | 25 | 28 | 80 | 25 | 60 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

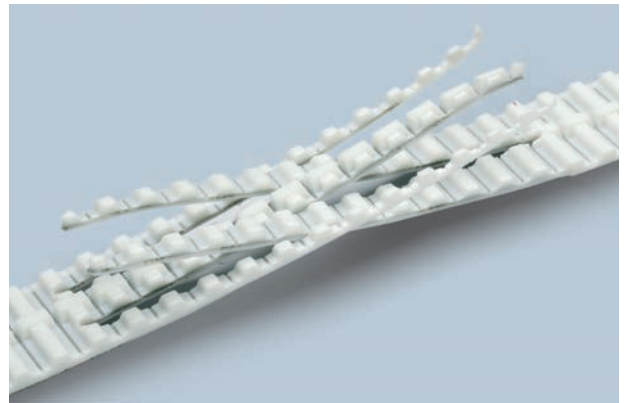

PULLEYS (for more details please see our pulleys catalogue)

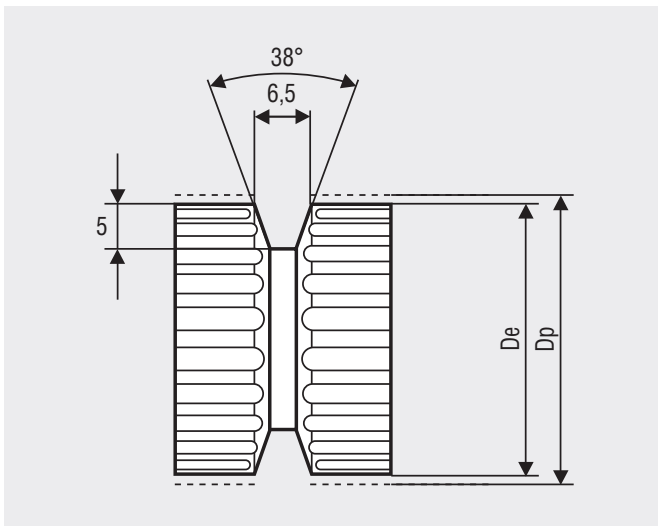


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 25 | 39,79 | 38,96 | 36 | 57,30 | 56,47 |
| 27 | 42,97 | 42,14 | 40 | 63,66 | 62,93 |
| 30 | 47,75 | 46,92 | 48 | 76,39 | 75,57 |
| 32 | 50,93 | 50,10 | 60 | 95,49 | 94,67 |

MEGALINEAR TG10 OPEN-END

BELT CHARACTERISTICS



| STANDARD WIDTHS (mm) | 25TG10K13 | 32TG10K13 | 50TG10K13 | 75TG10K13 | 100TG10K13 | 50TG10K6 |
|----------------------|-----------|-----------|-----------|-----------|------------|----------|
| Weight (gr/m) | 190 | 250 | 290 | 390 | 495 | 240 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFc 60/70/85 ShA
 - Cleats

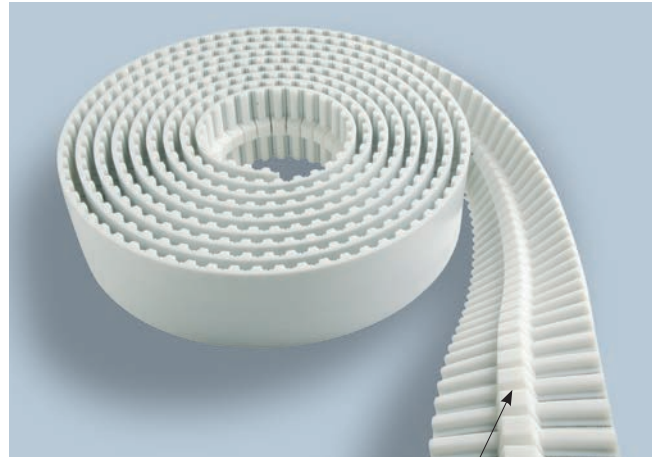

notched guide

Different back coating materials see page 116
 *Nylon fabric teeth excluding guide (2 fabric strips on teeth only) is standard version.
 Nylon fabric teeth including guide (fabric on complete width) is only on request.

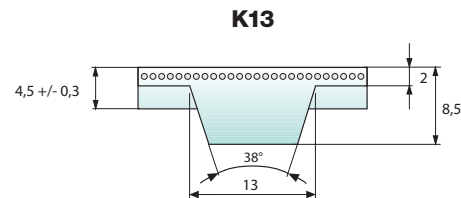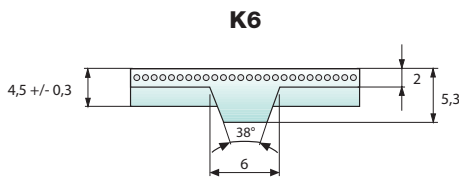

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 51 | 49 | 48 | 47 | 46 | 45 | 41 | 39 | 37 | 36 | 33 | 31 | 28 | 25 | 22 | 20 | 18 | 14 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25TG10K13 | 32TG10K13 | 50TG10K13 | 75TG10K13 | 100TG10K13 | 50TG10K6 |
|-----------------|--------------------------|-----------|-----------|-----------|-----------|------------|----------|
| Steel | Max Traction Load (N) | 2415 | 3045 | 5040 | 8065 | 10830 | 5040 |
| | Breaking Strength (N) | 9660 | 12180 | 20160 | 30660 | 41160 | 20160 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 2050 | 2565 | 4360 | 7020 | 9450 | 4360 |
| | Breaking Strength (N) | 8205 | 10260 | 17440 | 26675 | 35910 | 17440 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 |
| Stainless | Max Traction Load (N) | 1855 | 2340 | 3875 | - | - | 3875 |
| | Breaking Strength (N) | 7425 | 9365 | 15500 | - | - | 15500 |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - | - | 3,8 |

Average values


FLEXION RESISTANCE

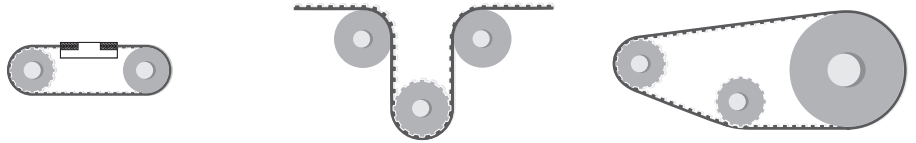


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 25 | 28 | 80 | 25 | 80 |
| Kevlar cords | 25 | 28 | 80 | 25 | 80 |
| Stainless steel cords | 31 | 34 | 90 | 31 | 90 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

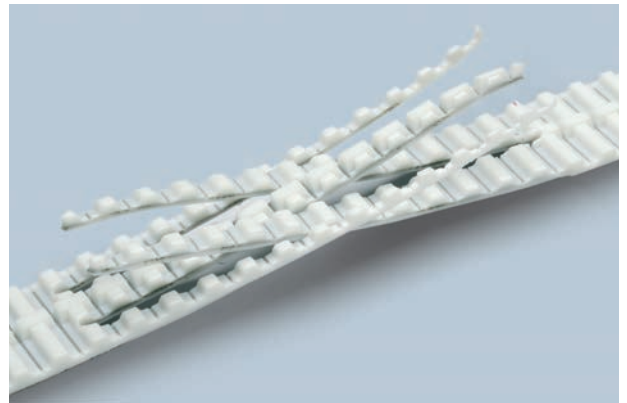

PULLEYS (for more details please see our pulleys catalogue)

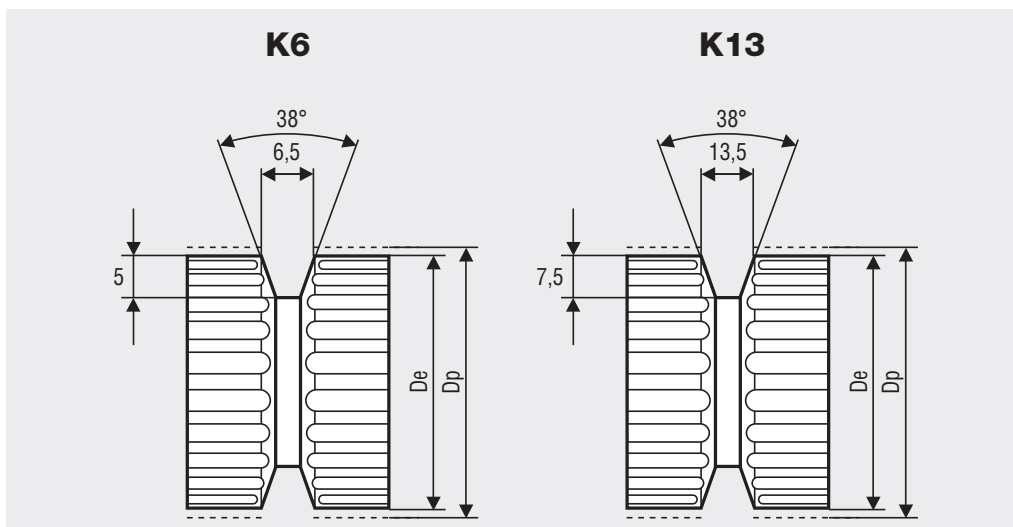


| N° Teeth | Dp | De |
|----------|--------|--------|
| 25 | 79,58 | 77,73 |
| 27 | 85,94 | 84,10 |
| 30 | 95,49 | 93,65 |
| 32 | 101,86 | 100,01 |
| 36 | 114,59 | 112,74 |
| 40 | 127,32 | 125,48 |
| 48 | 152,79 | 150,94 |
| 60 | 190,99 | 189,14 |

MEGALINEAR TG20 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 50 | 75 | 100 |
|----------------------|-----|-----|-----|
| Weight (gr/m) | 375 | 590 | 770 |


- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - Cleats

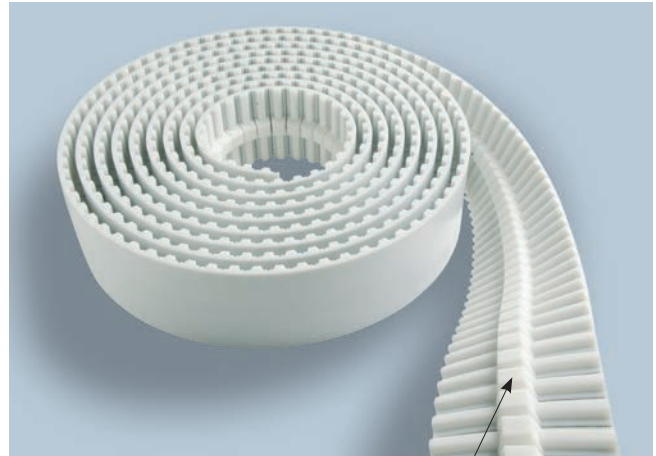

Different back coating materials see page 116

* Nylon fabric teeth including guide (fabric on complete width) is standard version.
 Nylon fabric teeth excluding guide (2 fabric strips on teeth only) is only on request.

notched guide

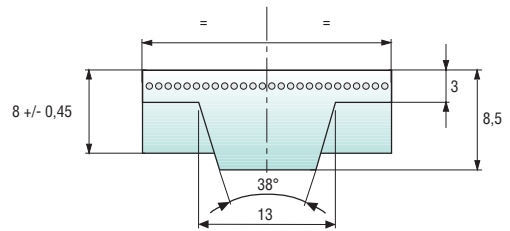

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | |
|----------------------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
| F _{p spec} (N/cm) | 102 | 98 | 95 | 93 | 91 | 89 | 81 | 76 | 72 | 68 | 62 | 57 | 50 | 45 | 38 | 33 | 29 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 50 | 75 | 100 |
|-----------------|--------------------------|-------|-------|-------|
| Steel | Max Traction Load (N) | 8075 | 13000 | 17500 |
| | Breaking Strength (N) | 32300 | 49400 | 66500 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 9135 | 14800 | 19975 |
| | Breaking Strength (N) | 36555 | 56240 | 75920 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 |

Average values


FLEXION RESISTANCE

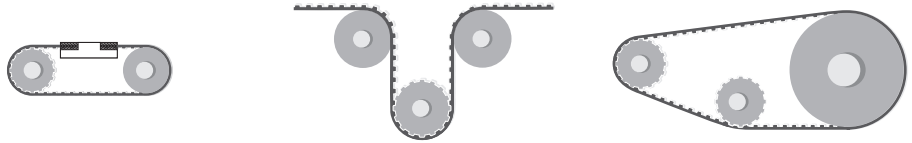


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 30 | 33 | 140 | 30 | 120 |
| Kevlar cords | 30 | 33 | 140 | 30 | 120 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT and NFB can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

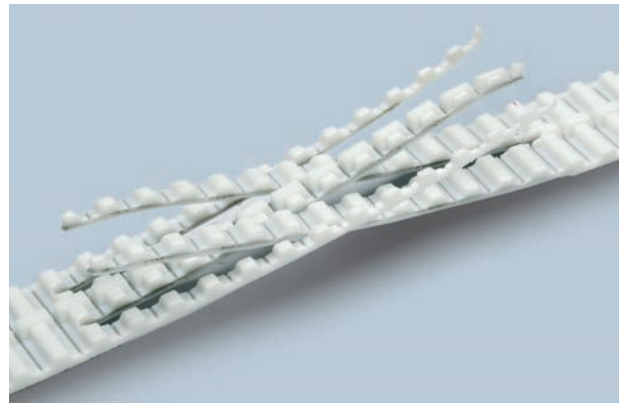

PULLEYS (for more details please see our pulleys catalogue)

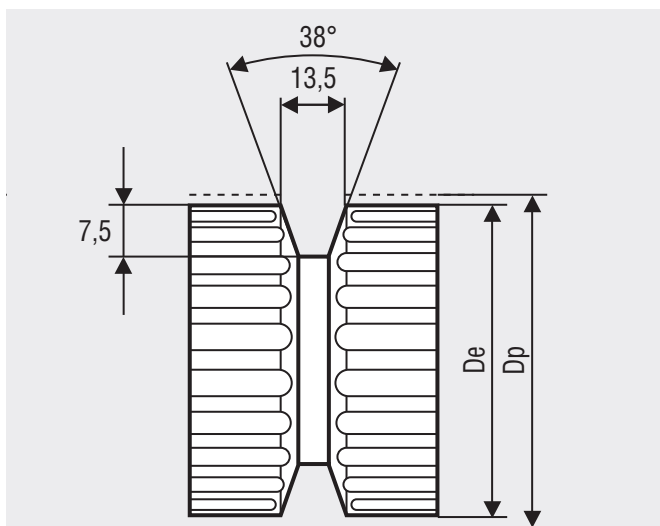


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 30 | 190,99 | 188,13 | 40 | 254,65 | 251,80 |
| 32 | 203,72 | 200,86 | 48 | 305,58 | 302,73 |
| 36 | 229,18 | 226,33 | 60 | 381,97 | 379,12 |

MEGALINEAR ATG5 OPEN-END

BELT CHARACTERISTICS


| STANDARD WIDTHS (mm) | 25 | 32 | 50 |
|----------------------|----|-----|-----|
| Weight (gr/m) | 95 | 120 | 180 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - Cleats

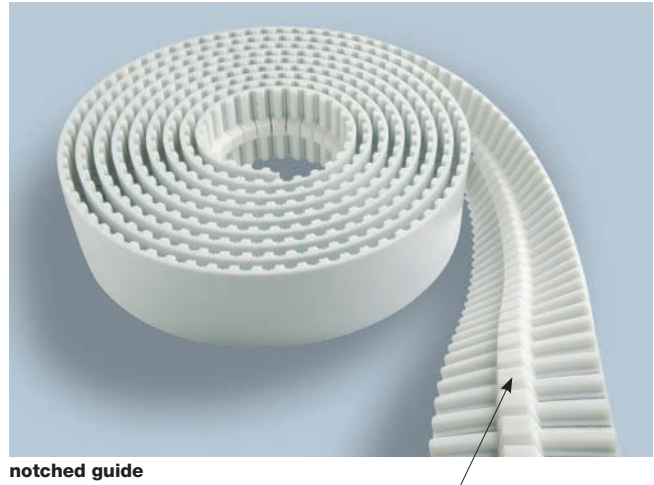

Different back coating materials see page 116

* Nylon fabric teeth excluding guide (2 fabric strips on teeth only).

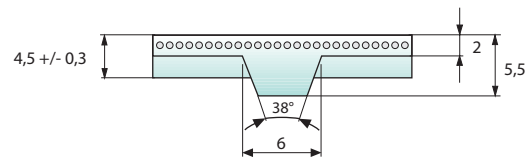

TOOTH RESISTANCE

| | | | | | | | | | | | | | | | | | | |
|----------------------------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
| F _{p spec} (N/cm) | 35 | 35 | 35 | 34 | 34 | 34 | 32 | 31 | 30 | 29 | 27 | 26 | 24 | 22 | 19 | 18 | 16 | 13 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 | 32 | 50 |
|-----------------|--------------------------|------|------|-------|
| Steel | Max Traction Load (N) | 1805 | 2275 | 3750 |
| | Breaking Strength (N) | 7235 | 9110 | 15005 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 |

Average values


FLEXION RESISTANCE

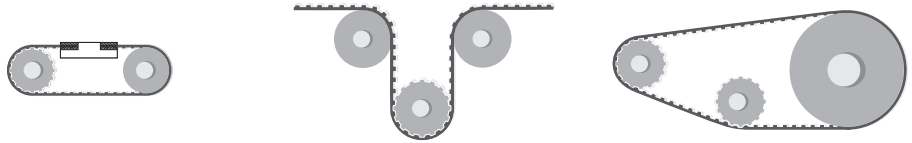


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 25 | 28 | 100 | 25 | 80 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

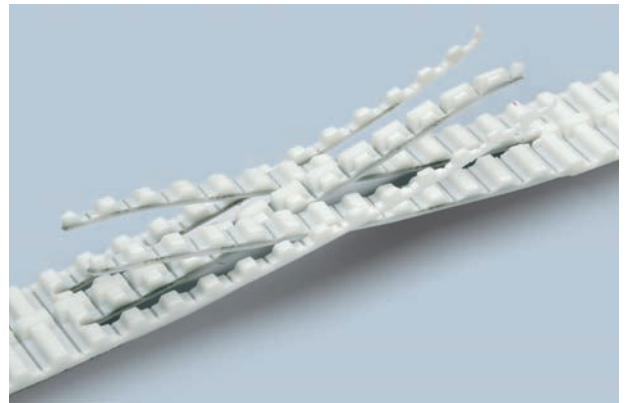

PULLEYS (for more details please see our pulleys catalogue)

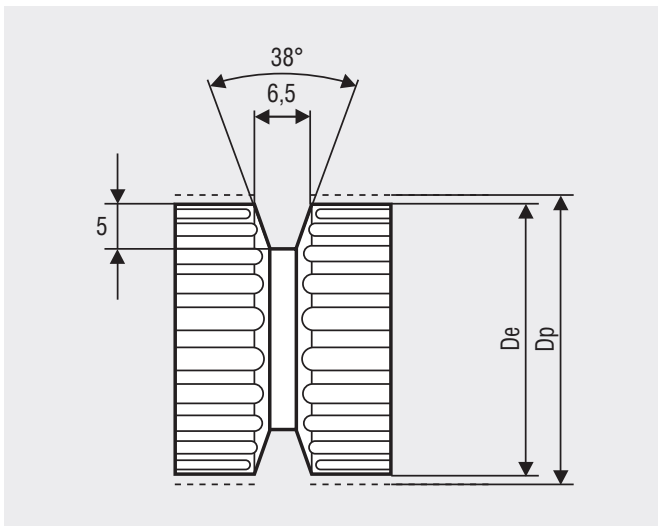


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|-------|-------|
| 25 | 39,79 | 38,96 | 36 | 57,30 | 56,47 |
| 27 | 42,97 | 42,14 | 40 | 63,66 | 62,93 |
| 30 | 47,75 | 46,92 | 48 | 76,39 | 75,57 |
| 32 | 50,93 | 50,10 | 60 | 95,49 | 94,67 |

MEGALINEAR ATG10 OPEN-END

BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 25 ATG10K13 | 32 ATG10K13 | 50 ATG10K13 | 75 ATG10K13 | 100 ATG10K13 | 150 ATG10K13 | 50 ATG10K6 |
|----------------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|
| Weight (gr/m) | 180 | 230 | 330 | 465 | 620 | 930 | 290 |


- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 0,5 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
- Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - Cleats

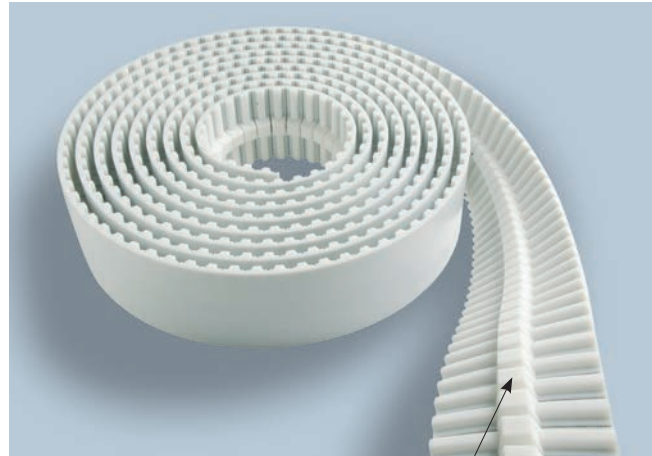

Different back coating materials see page 116

*Nylon fabric teeth excluding guide (2 fabric strips on teeth only) is standard version.

Nylon fabric teeth including guide (fabric on complete width) is only on request.

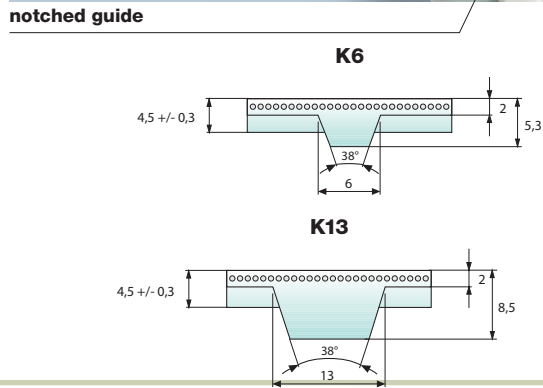

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 8000 |
|----------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 74 | 72 | 71 | 71 | 70 | 69 | 65 | 62 | 60 | 58 | 53 | 50 | 44 | 40 | 35 | 30 | 27 | 20 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 25 ATG10K13 | 32 ATG10K13 | 50 ATG10K13 | 75 ATG10K13 | 100 ATG10K13 | 150 ATG10K13 | 50 ATG10K6 |
|-----------------|--------------------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|
| Steel | Max Traction Load (N) | 3800 | 4750 | 8075 | 13000 | 17500 | 28225 | 8075 |
| | Breaking Strength (N) | 15200 | 19000 | 32300 | 49400 | 66500 | 98800 | 32300 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Kevlar | Max Traction Load (N) | 4215 | 5620 | 9135 | 14800 | 19980 | 32940 | 9135 |
| | Breaking Strength (N) | 16870 | 22495 | 36555 | 56240 | 75920 | 115290 | 36555 |
| | Elongation at MTL (mm/m) | 8 | 8 | 8 | 8 | 8 | 8 | 8 |
| HP | Max Traction Load (N) | 5190 | 6920 | 11245 | 18210 | 24580 | 40530 | 11245 |
| | Breaking Strength (N) | 20760 | 27680 | 44980 | 69200 | 93420 | 141860 | 44980 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Stainless | Max Traction Load (N) | 2865 | 3585 | 6095 | - | - | - | 6095 |
| | Breaking Strength (N) | 11475 | 14345 | 24385 | - | - | - | 24385 |
| | Elongation at MTL (mm/m) | 3,8 | 3,8 | 3,8 | - | - | - | 3,8 |

Average values


FLEXION RESISTANCE

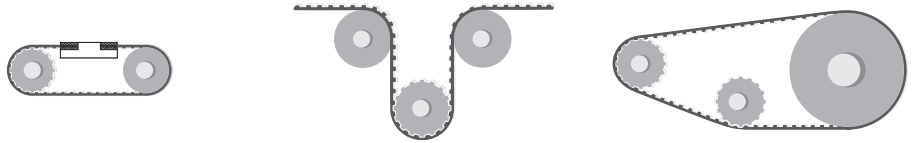


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|-----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 25 | 28 | 120 | 25 | 80 |
| Kevlar cords | 25 | 28 | 120 | 25 | 100 |
| High Power cords | 40 | 40 | 160 | 40 | 120 |
| Stainless steel cords | 32 | 34 | 130 | 32 | 130 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

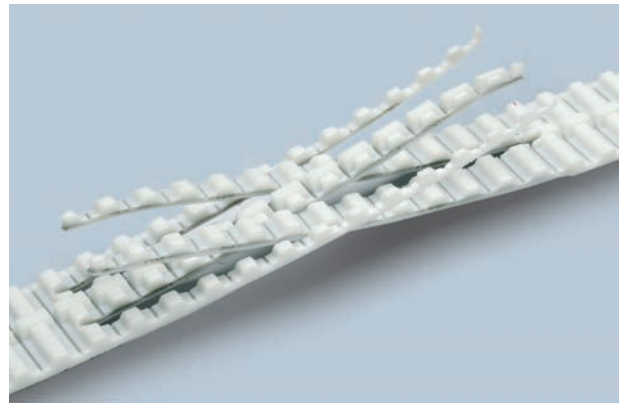

PULLEYS (for more details please see our pulleys catalogue)

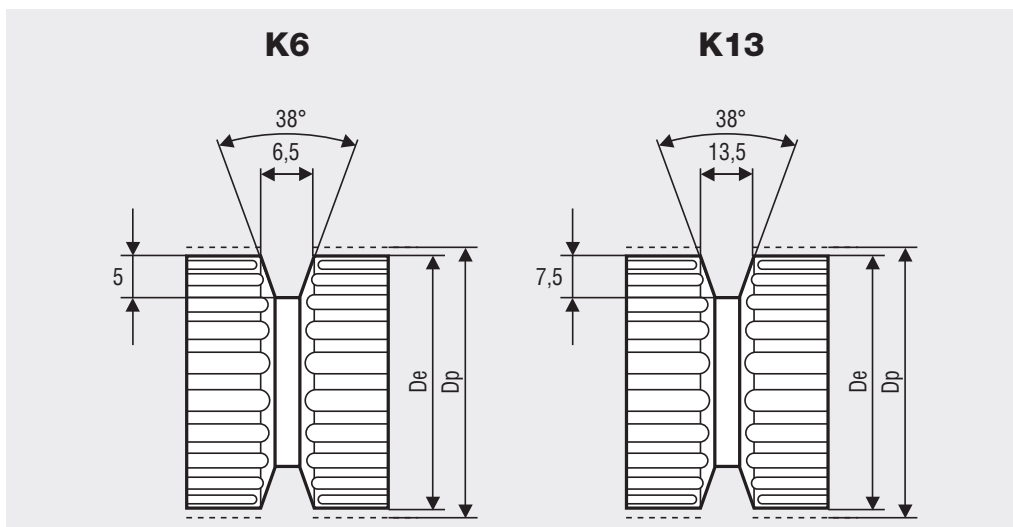


| N° Teeth | Dp | De |
|----------|--------|--------|
| 25 | 79,58 | 77,73 |
| 27 | 85,94 | 84,10 |
| 30 | 95,49 | 93,65 |
| 32 | 101,86 | 100,01 |
| 36 | 114,59 | 112,74 |
| 40 | 127,32 | 125,48 |
| 48 | 152,79 | 150,94 |
| 60 | 190,99 | 189,14 |

MEGALINEAR ATG20 OPEN-END


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 75 | 150 |
|----------------------|-----|------|
| Weight (gr/m) | 795 | 1500 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **none**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **+/- 1 mm**
- Standard length tolerance: **+/- 0,8 mm/m**
- Standard roll length: **100 m**
- Belt options on request with minimum quantity:
 - Nylon fabric back
 - Nylon fabric teeth*
 - Antistatic nylon fabric
 - Transparent FDA compound
 - AVAFC 60/70/85 ShA
 - Cleats

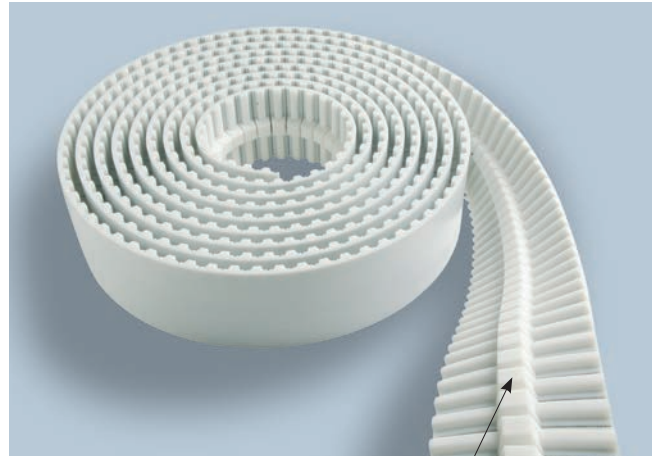

notched guide

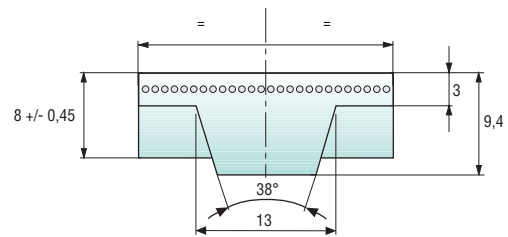

Different back coating materials see page 116

* Nylon fabric teeth excluding guide (2 fabric strips on teeth only).

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| F _{p spec} (N/cm) | 147 | 144 | 142 | 139 | 137 | 135 | 126 | 119 | 112 | 107 | 97 | 88 | 76 | 67 | 58 | 43 | 35 |


Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 75 | 150 |
|-----------------|--------------------------|-------|--------|
| Steel | Max Traction Load (N) | 18210 | 40530 |
| | Breaking Strength (N) | 69200 | 141860 |
| | Elongation at MTL (mm/m) | 4 | 4 |

Average values


FLEXION RESISTANCE

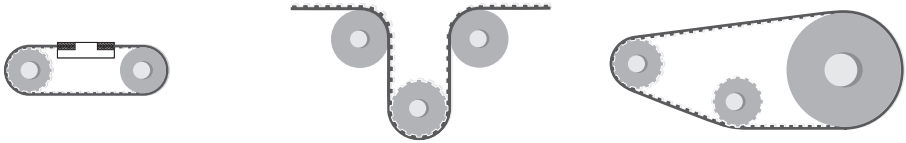


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 30 | 34 | 180 | 30 | 160 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

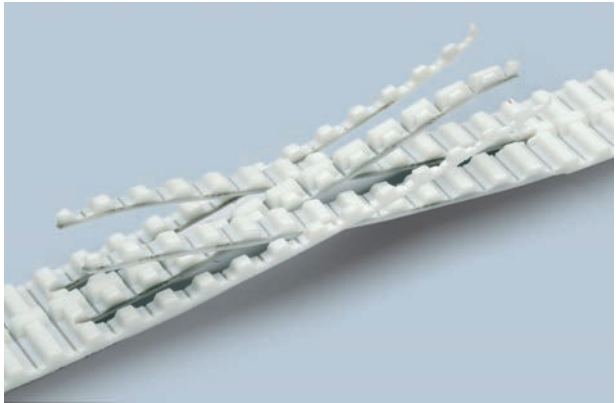

PULLEYS (for more details please see our pulleys catalogue)

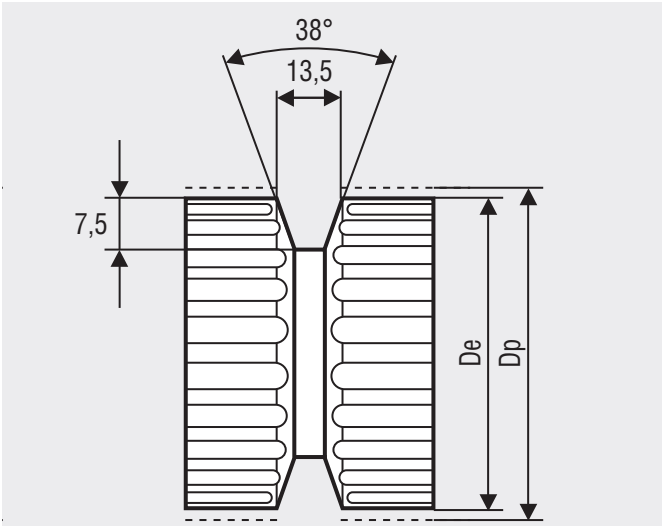


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|--------|--------|----------|--------|--------|
| 30 | 190,99 | 188,13 | 40 | 254,65 | 251,80 |
| 32 | 203,72 | 200,86 | 48 | 305,58 | 302,73 |
| 36 | 229,18 | 226,33 | 60 | 381,97 | 379,12 |

MEGALINEAR QST 5


BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 12 | 24 |
|----------------------|----|-----|
| Weight (gr/m) | 60 | 120 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **nylon fabric (NFT)**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **-/+ 0,5 mm**
 Standard length tolerance: **-/+ 0,5 mm/m**
 Standard roll length: **100 m**

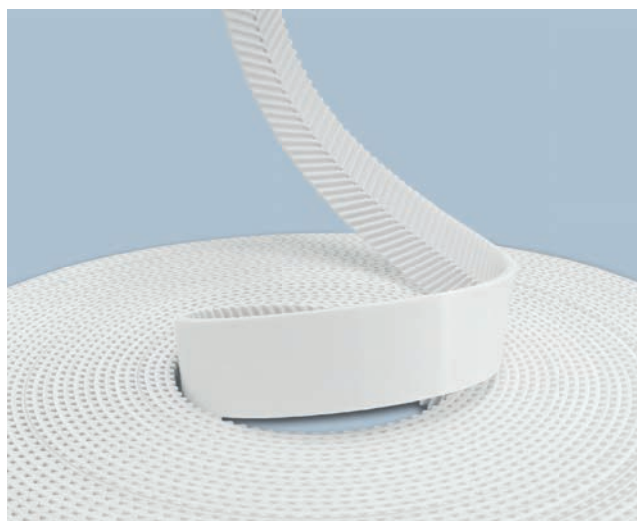

Different back coating materials see page 116
 Please ask the feasibility to customer service or OEM team.

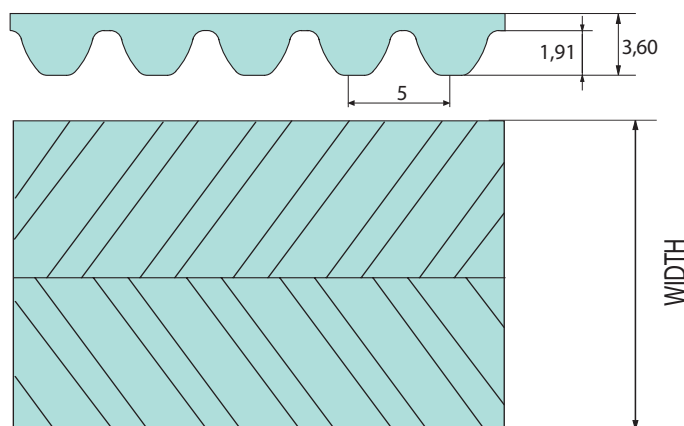

TOOTH RESISTANCE


| | | | | | | | | | | | |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 |
| $F_{p\ spec}$ (N/cm) | 38 | 37 | 37 | 36 | 36 | 35 | 34 | 33 | 32 | 31 | 30 |
| RPM (1/min) | 1000 | 1250 | 1500 | 1750 | 2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 8000 |
| $F_{p\ spec}$ (N/cm) | 28 | 27 | 26 | 25 | 24 | 22 | 21 | 19 | 19 | 17 | 11 |

Minimum suggested number of teeth in clamp for linear movement: 7

TRACTION RESISTANCE

| Belt width (mm) | | 12 | 24 |
|-----------------|-----------------------|------|------|
| Steel | Max Traction Load (N) | 1135 | 2497 |
| | Breaking Strength (N) | 4200 | 9240 |
| Average values | | | |


FLEXION RESISTANCE

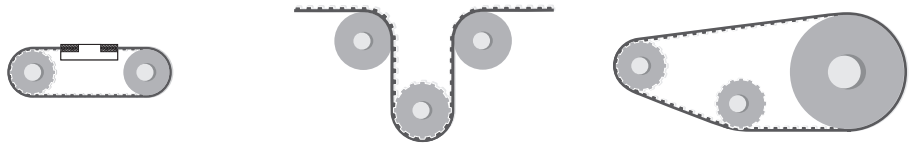


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 16 | 25 | 60 | 16 | 30 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

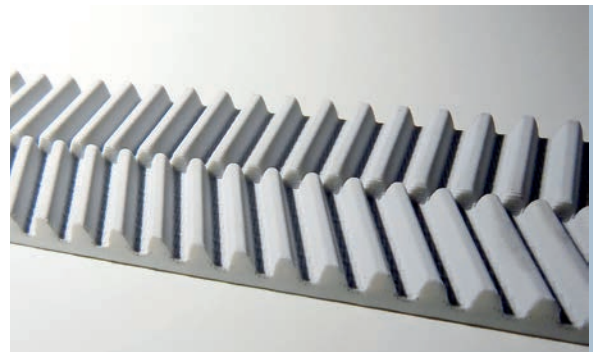

PULLEYS

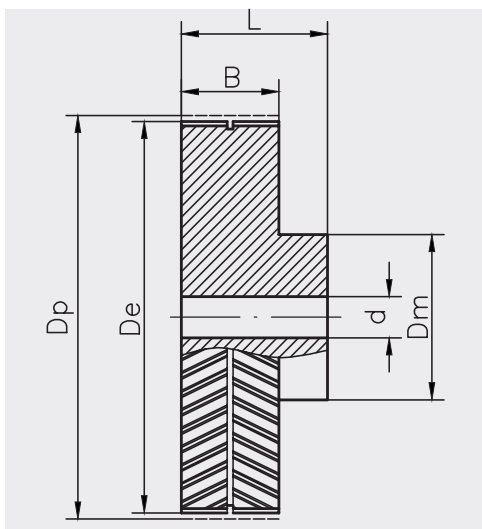


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 16 | 25,46 | 24,32 | 30 | 47,75 | 46,60 |
| 18 | 28,65 | 27,50 | 32 | 50,93 | 49,79 |
| 20 | 31,83 | 30,69 | 36 | 57,30 | 56,15 |
| 21 | 33,42 | 32,28 | 40 | 63,66 | 62,52 |
| 22 | 35,01 | 33,87 | 44 | 70,03 | 68,89 |
| 24 | 38,20 | 37,05 | 48 | 76,39 | 75,25 |
| 26 | 41,38 | 40,24 | 60 | 95,49 | 94,35 |
| 28 | 44,56 | 43,42 | 72 | 114,59 | 113,45 |

MEGALINEAR QST 8

BELT CHARACTERISTICS


| STANDARD WIDTHS (mm) | 16 | 25 | 32 | 50 |
|----------------------|----|-----|-----|-----|
| Weight (gr/m) | 85 | 145 | 180 | 300 |

- Standard compound: **white Polyurethane thermoplastic 92 ShA**
- Standard back cover: **none**
- Standard tooth cover: **nylon fabric (NFT)**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **-/+ 0,5 mm**
- Standard length tolerance: **-/+ 0,8 mm/m**
- Standard roll length: **100 m**

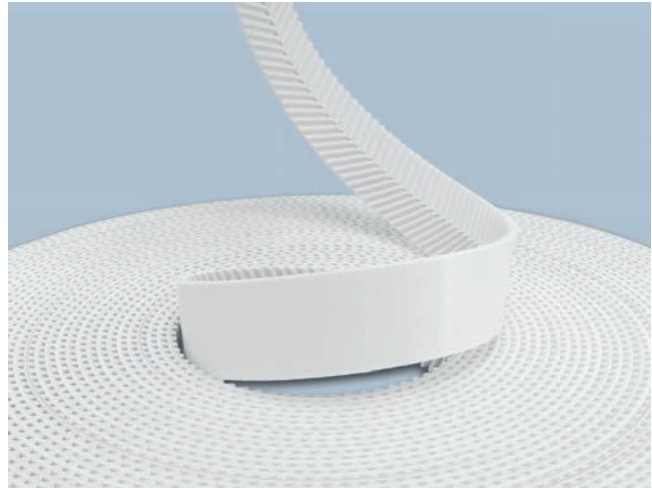


Different back coating materials see page 116
Please ask the feasibility to customer service or OEM team

Steel cords

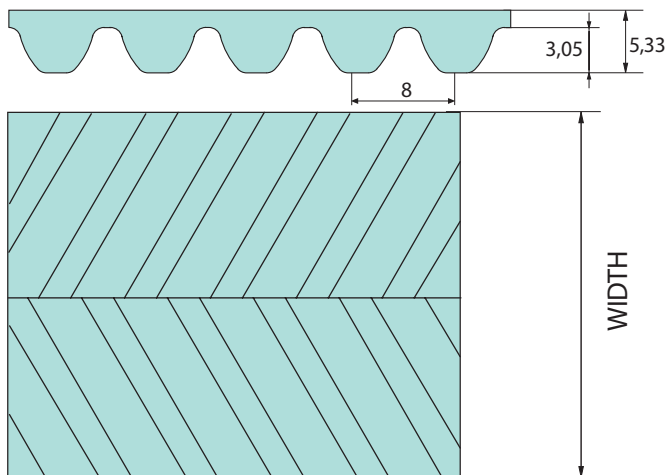

HP

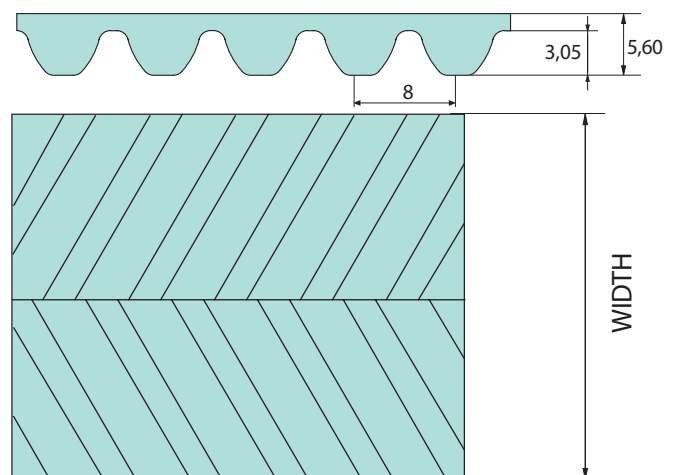

TOOTH RESISTANCE

| | | | | | | | | | | | |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 |
| $F_{p\ spec}$ (N/cm) | 85 | 83 | 82 | 81 | 80 | 79 | 75 | 71 | 68 | 66 | 61 |
| RPM (1/min) | 1000 | 1250 | 1500 | 1750 | 2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 8000 |
| $F_{p\ spec}$ (N/cm) | 57 | 54 | 51 | 48 | 46 | 43 | 40 | 37 | 35 | 31 | 23 |


Minimum suggested number of teeth in clamp for linear movement: 7-HP cords minimum suggested number of teeth in clamp 10

TRACTION RESISTANCE

| Belt width (mm) | | 16 | 25 | 32** | 50** |
|-----------------|-----------------------|-------|-------|-------|-------|
| Steel | Max Traction Load (N) | 2610 | 4275 | 5462 | 8787 |
| | Breaking Strength (N) | 10450 | 17100 | 21850 | 35150 |
| HP | Max Traction Load (N) | 3740 | 6545 | 8415 | 14025 |
| | Breaking Strength (N) | 13840 | 24220 | 31140 | 51900 |
| Average values | | | | | |

**HP VERSION Under construction


FLEXION RESISTANCE

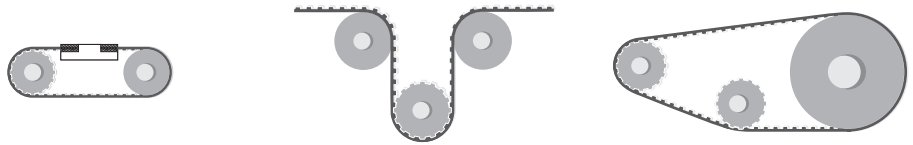


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 16 | 25 | 60 | 16 | 30 |
| High Power cords | 20 | 30 | 120 | 20 | 50 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

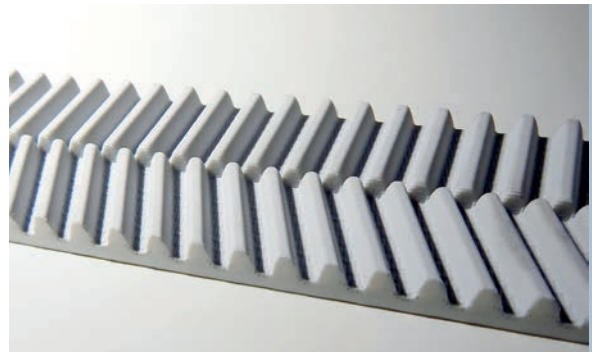

PULLEYS

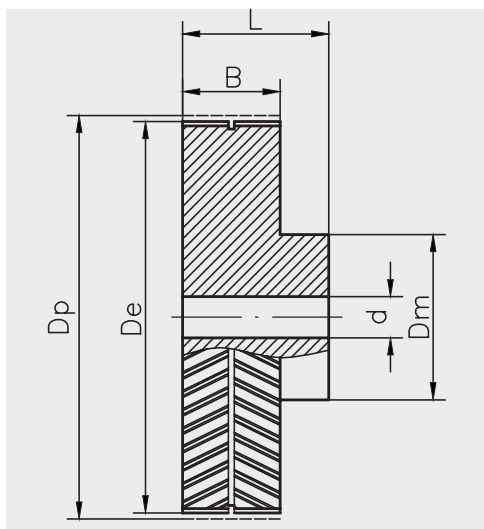


| N° Teeth | Dp | De | N° Teeth | Dp | De |
|----------|-------|-------|----------|--------|--------|
| 18 | 45,84 | 44,47 | 36 | 91,68 | 90,30 |
| 22 | 56,02 | 54,65 | 38 | 96,77 | 95,40 |
| 24 | 61,12 | 59,75 | 40 | 101,86 | 100,49 |
| 26 | 66,21 | 64,84 | 44 | 112,05 | 110,68 |
| 28 | 71,30 | 69,93 | 48 | 122,23 | 120,86 |
| 30 | 76,40 | 75,03 | 52 | 132,42 | 131,05 |
| 32 | 81,49 | 80,12 | 60 | 152,79 | 151,42 |
| 34 | 86,58 | 85,21 | | | |

MEGALINEAR QST 14

BELT CHARACTERISTICS


| STANDARD WIDTHS (mm) | 35 | 52,5 | 70 | 105 |
|----------------------|-----|------|-----|------|
| Weight (gr/m) | 400 | 600 | 800 | 1200 |

Standard compound: **white Polyurethane thermoplastic 92 ShA**
 Standard back cover: **none**
 Standard tooth cover: **nylon fabric (NFT)**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **-/+ 1 mm**
 Standard length tolerance: **-/+ 0,8 mm/m**
 Standard roll length: **100 m**

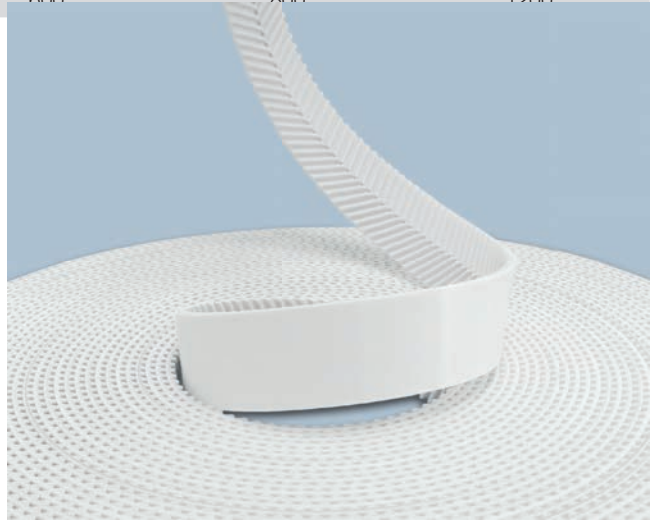


Different back coating materials see page 116
 Please ask the feasibility to customer service or OEM team

Steel cords

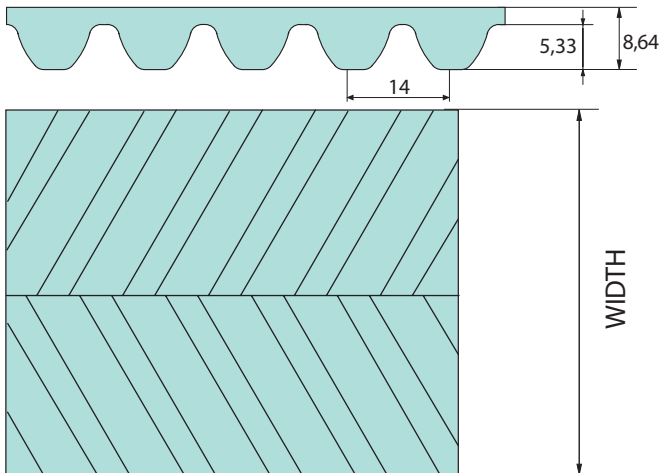

XHP cords

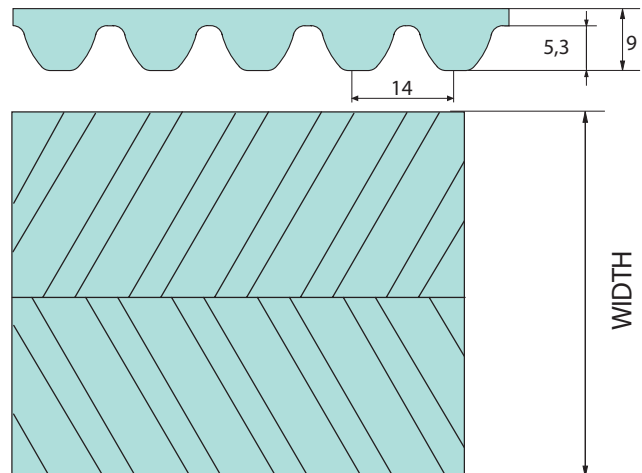

TOOTH RESISTANCE

| | | | | | | | | | | | |
|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 | 750 |
| $F_{p\ spec}$ (N/cm) | 160 | 157 | 154 | 152 | 149 | 147 | 137 | 130 | 122 | 117 | 105 |
| RPM (1/min) | 1000 | 1250 | 1500 | 1750 | 2000 | 2500 | 3000 | 3500 | 4000 | | |
| $F_{p\ spec}$ (N/cm) | 96 | 89 | 83 | 77 | 72 | 64 | 57 | 50 | 47 | | |

Minimum suggested number of teeth in clamp for linear movement: 7- XHP cords minimum suggested number of teeth in clamp 10


TRACTION RESISTANCE

| Belt width (mm) | | 35 | 52,5 | 70** | 105** |
|-----------------|-----------------------|-------|--------|--------|--------|
| Steel | Max Traction Load (N) | 11200 | 17680 | 23575 | 36210 |
| | Breaking Strength (N) | 44800 | 67200 | 89600 | 137600 |
| XHP | Max Traction Load (N) | 15155 | 26525 | 34105 | 53050 |
| | Breaking Strength (N) | 57600 | 100800 | 129600 | 201600 |

Average values

**XHP VERSION Under construction


FLEXION RESISTANCE

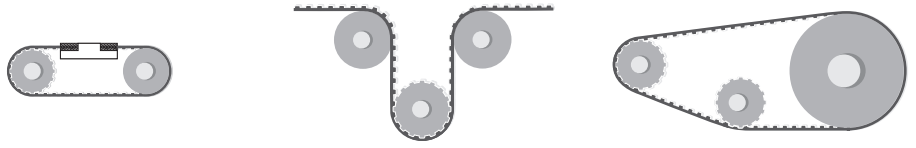


| | Z_{min} | Z_{min} | Idler min dia (mm) | Z_{min} | Idler min dia (mm) |
|------------------------|-----------|-----------|--------------------|-----------|--------------------|
| Standard steel cords | 32 | 32 | 200 | 32 | 140 |
| Extra high power cords | 32 | 32 | 200 | 32 | 140 |

JOINED BELT INFORMATIONS

- Minimum splice length 900 mm
- Traction and tooth resistances = 50% less than open-end
- Joined belt can be used only in conveyor systems
- Rolls with NFT, NFB, and AVAFC can be joined too
- Minimum diameters according above table
- For coated belts, minimum diameters on page 116

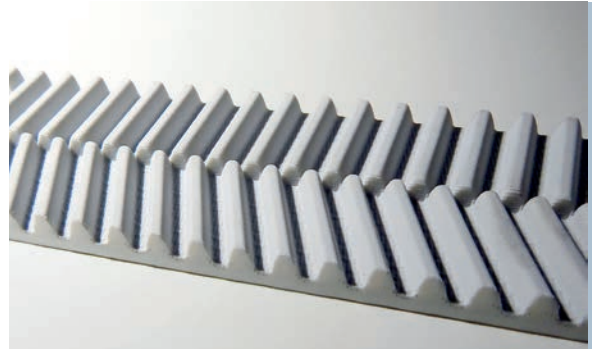

PULLEYS

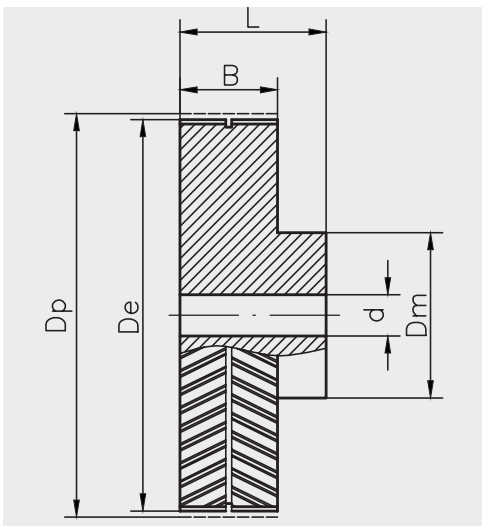

| N° Teeth | Dp | De |
|----------|--------|--------|
| 32 | 142,61 | 139,81 |
| 34 | 151,52 | 148,73 |
| 36 | 160,43 | 157,64 |
| 38 | 169,35 | 166,55 |
| 40 | 178,26 | 175,46 |
| 48 | 213,91 | 211,12 |

MEGALINEAR GW14



BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 50 | 100 | 150 | 200 |
|----------------------|-----|------|------|------|
| Weight (gr/m) | 740 | 1500 | 2250 | 3000 |

Standard compound: **black Polyurethane thermoplastic 96 ShA**
 Standard back cover: **none**
 Standard tooth cover: **nylon fabric (NFT)**
 Standard cords: **S and Z torsion zinked steel**
 Standard width tolerance: **-/+ 1 mm**
 Standard length tolerance: **+0 -0,6 mm/m**
 Standard roll length: **100 m**

Suggestions: this type of belts must be well pre-tensioned.

Different back coating materials see page 116

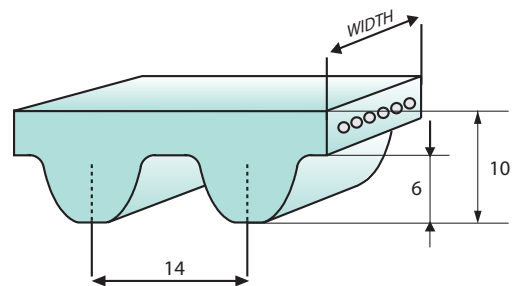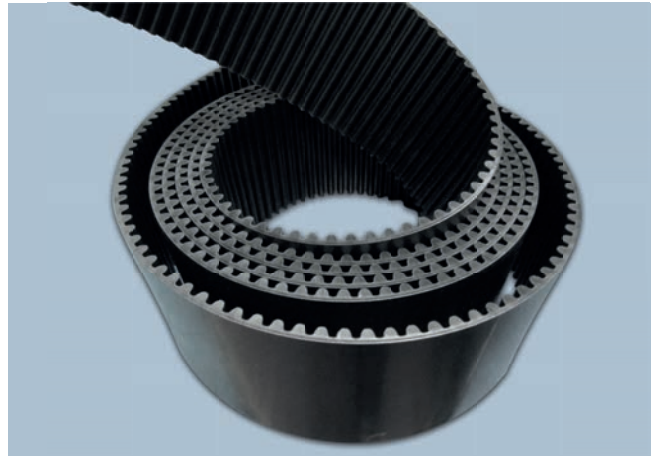

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 |
|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| $F_{p\ spec}$ (N/cm) | 155 | 152 | 149 | 147 | 145 | 142 | 131 | 123 | 116 | 112 |

Linear speed over 7m/s, please contact our technical department



Minimum suggested number of teeth in clamp for linear movement: 13

TRACTION RESISTANCE

| Belt width (mm) | | 50 | 100 | 150 | 200 |
|-----------------|--------------------------|--------|--------|--------|--------|
| Steel | Max Traction Load (N) | 28400 | 60600 | 92800 | 123100 |
| | Breaking Strength (N) | 108000 | 230400 | 352800 | 468000 |
| | Elongation at MTL (mm/m) | 5,5 | 5,5 | 5,5 | 5,5 |

Average values

FLEXION RESISTANCE




| | Z_{min} | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|
| Standard steel cords | 32 | 36 | 250 |

TYPICAL BELT APPLICATION - AUTOMATIC WAREHOUSE



PULLEYS (for more details please see our pulleys catalogue)

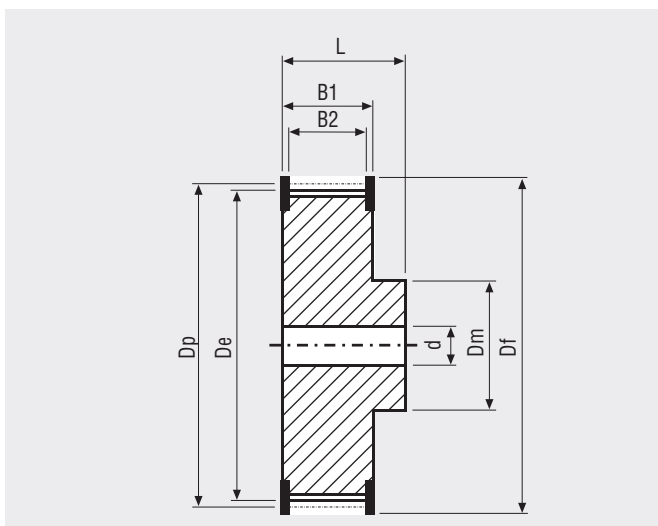

| N° Teeth | Dp | De |
|----------|--------|--------|
| 32 | 142,60 | 139,80 |
| 34 | 151,52 | 148,72 |
| 36 | 160,43 | 157,63 |
| 38 | 169,34 | 166,54 |
| 40 | 178,25 | 175,45 |
| 44 | 196,08 | 193,28 |
| 48 | 213,90 | 211,10 |
| 56 | 249,56 | 246,76 |
| 64 | 285,21 | 282,41 |
| 72 | 320,86 | 318,06 |
| 80 | 356,51 | 353,71 |
| 90 | 401,07 | 398,27 |

MEGALINEAR GW20



BELT CHARACTERISTICS

| STANDARD WIDTHS (mm) | 50 | 100 | 150 | 200 |
|----------------------|------|------|------|------|
| Weight (gr/m) | 1050 | 2030 | 3040 | 4060 |

- Standard compound: **black Polyurethane thermoplastic 96 ShA**
- Standard back cover: **none**
- Standard tooth cover: **nylon fabric (NFT)**
- Standard cords: **S and Z torsion zinked steel**
- Standard width tolerance: **-/+ 2 mm**
- Standard thickness : **14,3 +/- 0,6 mm**
- Standard length tolerance: **+0 - 1,6mm/m**
- Standard roll length: **100 m**

Suggestions: this type of belts must be well pre-tensioned.

Different back coating materials see page 116

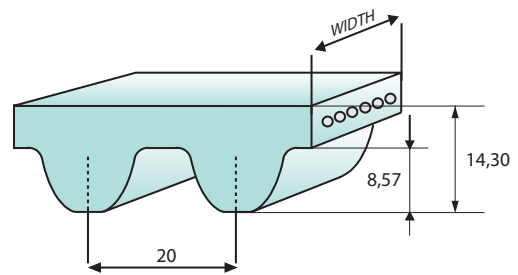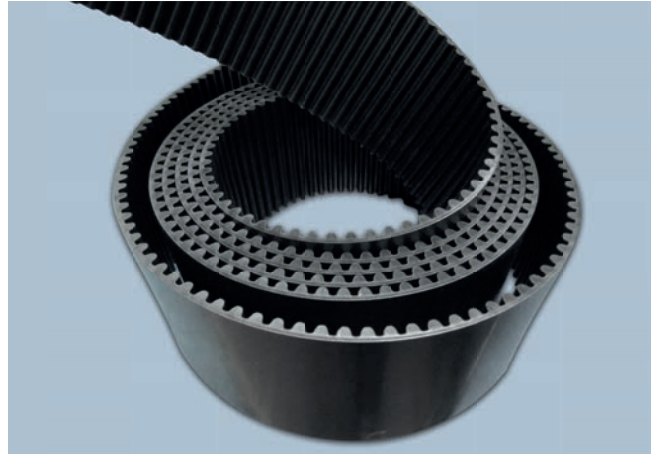

TOOTH RESISTANCE

| RPM (1/min) | 0 | 20 | 40 | 60 | 80 | 100 | 200 | 300 | 400 | 500 |
|----------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| $F_{p\ spec}$ (N/cm) | 210 | 207 | 198 | 192 | 187 | 182 | 168 | 158 | 150 | 144 |

Linear speed over 7m/s, please contact our technical department



Minimum suggested number of teeth in clamp for linear movement: 15

TRACTION RESISTANCE

| Belt width (mm) | | 50 | 100 | 150 | 200 |
|-----------------|--------------------------|--------|--------|--------|--------|
| Steel | Max Traction Load (N) | 37900 | 78900 | 120000 | 161000 |
| | Breaking Strength (N) | 144000 | 300000 | 456000 | 612000 |
| | Elongation at MTL (mm/m) | 5,5 | 5,5 | 5,5 | 5,5 |

Average values

FLEXION RESISTANCE




| | Z_{min} | Z_{min} | Idler min dia (mm) |
|----------------------|-----------|-----------|--------------------|
| Standard steel cords | 38 | 44 | 380 |

TYPICAL BELT APPLICATION - AUTOMATIC WAREHOUSE



PULLEYS Suggestions: material steel.- Use only pulley with gw profile. – Flanges 3,5mm fixed with screws.
B2= belt's width+16 mm.

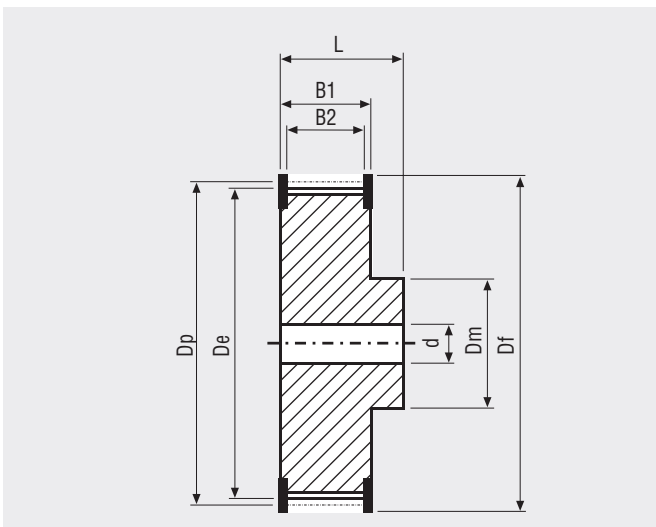

| N° Teeth | Dp | De |
|----------|--------|--------|
| 38 | 241,92 | 237,60 |
| 40 | 254,65 | 250,33 |
| 44 | 280,11 | 275,79 |
| 48 | 305,58 | 301,26 |
| 56 | 356,51 | 352,19 |
| 64 | 407,44 | 403,12 |
| 72 | 458,37 | 454,05 |
| 80 | 509,30 | 504,98 |


MEGALINEAR FLAT OPEN-END

BELT CHARACTERISTICS

| | 10 P1 | 20 P1 | 25 P2 | 50 P2 | 75 P2 | 100 P2 |
|---------------------|-----------|-----------|-----------|-----------|-----------|------------|
| Weight (gr/m) | 20 | 40 | 135 | 245 | 370 | 490 |
| Polyurethane 92 ShA | blue | blue | white | white | white | white |
| Width tolerance(mm) | 10 +/-0,5 | 20 +/-0,5 | 25 +/-0,5 | 30 +/-0,5 | 75 +/-0,5 | 100 +/-0,5 |
| Thickness (mm) | 1+/-0,1 | 1+/-0,1 | 2+/-0,2 | 2+/-0,2 | 2+/-0,2 | 2+/-0,2 |
| Gap | Straight | Straight | Straight | Straight | Straight | Straight |

| | 30 P3 | 60 P3 | 100 P3 | 120 P3 | 25 P4 | 50 P4 | 100 P4 |
|---------------------|-----------|-----------|------------|------------|-------------|-------------|-------------|
| Weight (gr/m) | 213 | 426 | 710 | 852 | 220 | 445 | 890 |
| Polyurethane 92 ShA | black | black | black | black | transparent | transparent | transparent |
| Width (mm) | 30 +/-0,5 | 60 +/-0,5 | 100 +/-0,5 | 120 +/-0,5 | 25 +/-0,5 | 50 +/-0,5 | 100 +/-0,5 |
| Thickness (mm) | 3,2+/-0,2 | 3,2+/-0,2 | 3,2+/-0,2 | 3,2+/-0,2 | 4+0,4/-0 | 4+0,4/-0 | 4+0,4/-0 |
| Gap | Helical | Helical | Helical | Helical | Straight | Straight | Straight |

Standard back cover: **none**
 Standard tooth cover: **none**
 Standard cords: **S and Z torsion zinked steel**
 Standard roll length: **100 m**
 Belt options on request with minimum quantity:
 Nylon fabric back
 Nylon fabric teeth
 Antistatic nylon fabric
 No gap
 Silicon free compound
 Special thickness tolerances by grinding (suggested for applications with rolled belts)


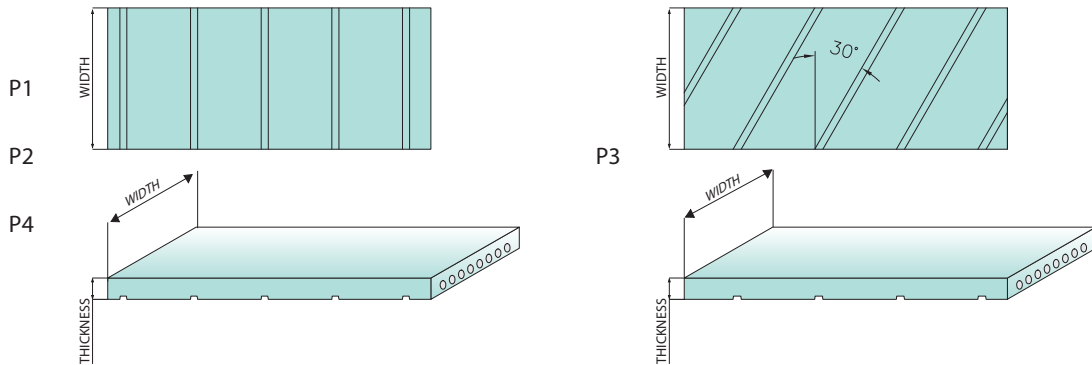


TRACTION RESISTANCE

| | Belt width (mm) | 10 P1 | 20 P1 | 25 P2 | 50 P2 | 75 P2 | 100 P2 |
|-------|--------------------------|-------|-------|-------|-------|-------|--------|
| Steel | Max Traction Load (N) | 490 | 980 | 3800 | 8075 | 13000 | 17500 |
| | Breaking Strength (N) | 1965 | 3935 | 15200 | 32300 | 49400 | 66500 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 |
| HP | Max Traction Load (N) | - | - | 5190 | 11245 | 18210 | 24580 |
| | Breaking Strength (N) | - | - | 20760 | 44980 | 69200 | 93420 |
| | Elongation at MTL (mm/m) | - | - | 4 | 4 | 4 | 4 |

| | Belt width (mm) | 30 P3 | 60 P3 | 100 P3 | 120 P3 | 25 P4 | 50 P4 | 100 P4 |
|-------|--------------------------|-------|-------|--------|--------|-------|-------|--------|
| Steel | Max Traction Load (N) | 9120 | 19200 | 32000 | 42560 | 8000 | 16000 | 34525 |
| | Breaking Strength (N) | 36480 | 72960 | 121600 | 148960 | 32000 | 64000 | 131200 |
| | Elongation at MTL (mm/m) | 4 | 4 | 4 | 4 | 4 | 4 | 4 |

FLEXION RESISTANCE



| | Driver pulley min dia (mm) | Driver pulley min dia (mm) | Idler min dia (mm) |
|-------------------------|-------------------------------|-------------------------------|--------------------|
| Standard steel cords P1 | 16 | 25 | 30 |
| Standard steel cords P2 | 45 | 50 | 90 |
| High Power cords P2 | 56 | 62 | 150 |
| Standard steel cords P3 | 100 | 110 | 150 |
| Standard steel cords P4 | 100 | 110 | 150 |

FIXING PLATES


DIMENSION OF THE FIXING PLATES

| Belt type | Clamping plates dimensions | | | | | Suggested clamping plate width W (mm) | | | | | | | | |
|--------------|----------------------------|-----------|-----------|-----------|--------------|---------------------------------------|----|----|----|----|----|-----|-----|-----|
| | L1 (mm) | C (mm) | D (mm) | T (mm) | Rmin (mm) | 10 | 20 | 25 | 30 | 50 | 60 | 75 | 100 | 120 |
| P1 | 20 | 25 | 16 | 3 | 10 | 20 | 20 | 30 | - | - | - | - | - | - |
| P2 | 25 | 30 | 20 | 3 | 10 | - | - | 50 | - | 75 | - | 100 | - | - |
| P2 HP | 25 | 30 | 20 | 3 | 10 | - | - | 50 | - | 75 | - | 100 | - | - |
| P3 | 30 | 75 | 50 | 5 | 25 | - | - | - | 60 | - | 90 | - | 132 | 160 |
| P4 | 30 | 120 | 80 | 7 | 40 | - | - | - | - | 75 | - | - | 125 | - |



SUGGESTION ABOUT THE FIXING SCREW

| Belt type | Kind of screws | Belt width (mm) | | | | | | | | | |
|-----------|----------------|-----------------|----|----|----|----|----|----|-----|-----|--|
| | | 10 | 20 | 25 | 30 | 50 | 60 | 75 | 100 | 120 | |
| P1 | M5 | 4 | 4 | - | - | - | - | - | - | - | |
| P2 | M6 | - | - | 4 | - | 4 | - | 6 | 8 | - | |
| P2 HP | M6 | - | - | 4 | - | 6 | - | 8 | 10 | - | |
| P3 | M8 | - | - | - | 4 | - | 6 | - | 8 | 12 | |
| P4 | M10 | - | - | 4 | - | 4 | - | - | 6 | - | |

| Belt type | Kind of screws | Suggested number of screws | | | | | | | | | |
|-----------|----------------|----------------------------|----|----|----|----|----|----|-----|-----|--|
| | | 10 | 20 | 25 | 30 | 50 | 60 | 75 | 100 | 120 | |
| P1 | M5 | 4 | 4 | - | - | - | - | - | - | - | |
| P2 | M6 | - | - | 4 | - | 4 | - | 6 | 8 | - | |
| P2 HP | M6 | - | - | 4 | - | 6 | - | 8 | 10 | - | |
| P3 | M8 | - | - | - | 4 | - | 6 | - | 8 | 12 | |
| P4 | M10 | - | - | 4 | - | 4 | - | - | 6 | - | |

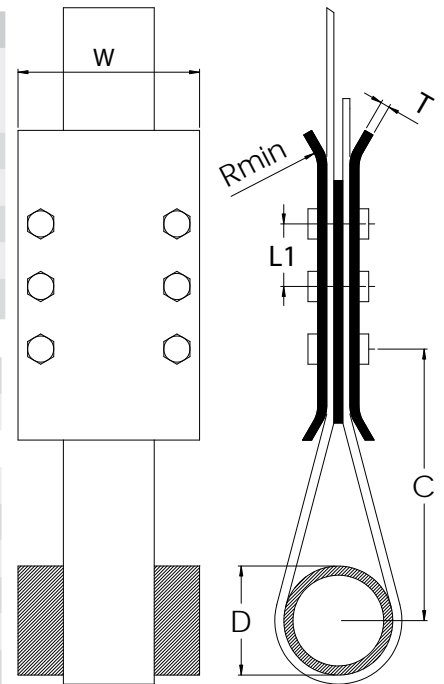

PULLEYS

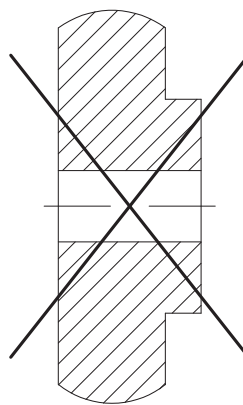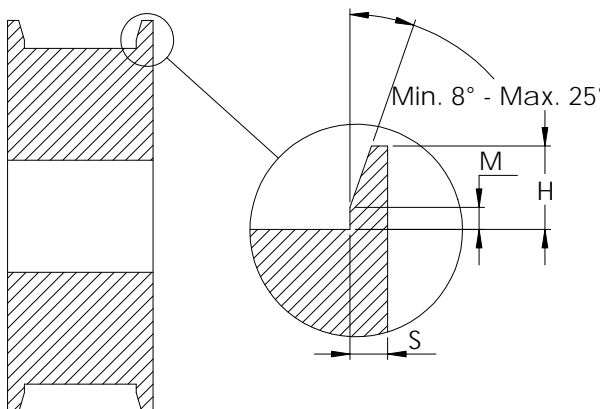

Suggested material: Aluminium or Zinked steel
Maximum superficial roughness: 1.6 Ra

Flanges according the table

| Belt type | S (mm) | M (mm) | H (mm) |
|-----------|--------|-----------|------------|
| P1 | 1,5 | 0,4+0,3/0 | 2,1+0,25/0 |
| P2 | 2,3 | 0,4+0,3/0 | 2,1+0,25/0 |
| P2 HP | 2,3 | 0,4+0,3/0 | 2,1+0,25/0 |
| P3 | 3 | 0,9+0,5/0 | 5+0,25/0 |
| P4 | 3 | 0,9+0,5/0 | 5+0,25/0 |

H: minimum height of flanges
S: minimum thickness of flanges
Rounded corner not quoted R = 0,8 mm

FIXING PLATES



The fixing plates are used to fix the tail of the open belts.

On the customer's request, the plates can be delivered with or without fixing holes.

As the belt can't be stretched with the fixing plates we suggest to use other tension system.

The plates are delivered in aluminium alloy.

The Megadyne Technical Staff is ready to study special or particular applications.

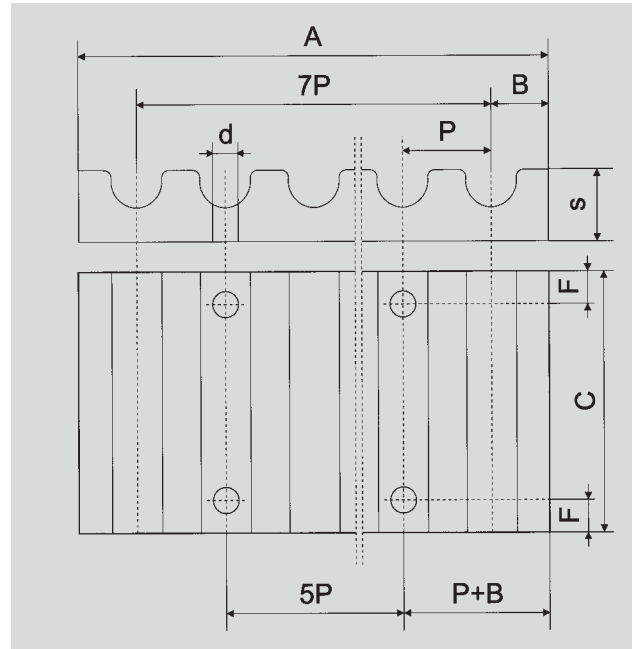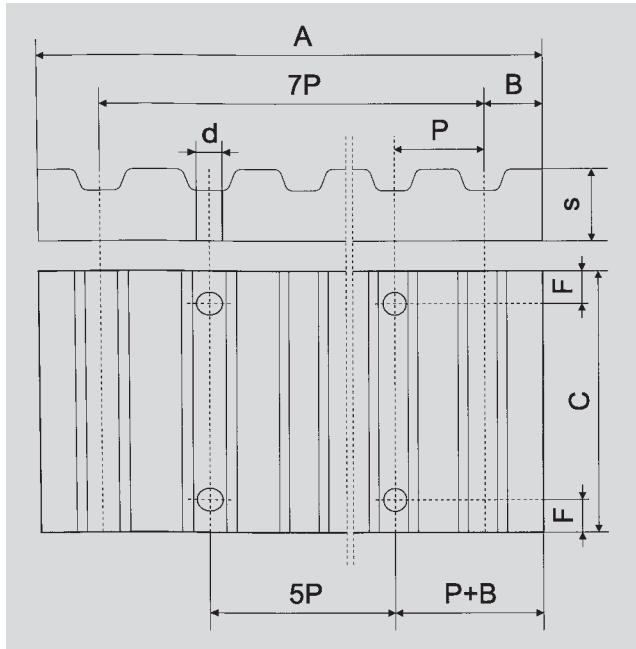

XL - L - H - T5 - T10 - T20 - AT5 - AT10 - AT20

HTD


Order code example: AT10 pitch clamping plate for 25 mm width belt.

| | | Clamping plates for imperial pitch belts | | | | | | | | | | | | | |
|-----------|-------|--|-----|-----|-------|----|---------------------|------|-----|-----|------|-----|-----|-----|-----|
| Aluminium | Pitch | F | d | B | A | S | Belt width (inches) | | | | | | | | |
| | | | | | | | 025 | 037 | 050 | 075 | 100 | 150 | 200 | 300 | 400 |
| | | | | | | | | C | | | | | | | |
| | •XL | 6 | 5,5 | 3,5 | 42,5 | 8 | 25,5 | 28,5 | 32 | 38 | 45 | - | - | - | - |
| | •L | 8 | 9 | 5 | 76,5 | 15 | - | - | 39 | 45 | 51,5 | 64 | 77 | - | - |
| | •H | 10 | 11 | 9 | 106,9 | 22 | - | - | 45 | 51 | 57,5 | 70 | 83 | 108 | 134 |

| | | Clamping plates for HTD pitch belts | | | | | | | | | | | | | | | | |
|-----------|-------|-------------------------------------|-----|------|------|----|-----------------|----|----|----|----|----|----|----|----|-----|-----|-----|
| Aluminium | Pitch | F | d | B | A | S | Belt width (mm) | | | | | | | | | | | |
| | | | | | | | 6 | 9 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 55 | 85 | 115 |
| | | | | | | | | C | | | | | | | | | | |
| | •5M | 6 | 5,5 | 3,25 | 41,5 | 8 | 25 | 28 | - | 34 | - | 44 | - | - | - | - | - | - |
| | •8M | 8 | 9 | 5 | 66 | 15 | - | - | 35 | 40 | 45 | - | 55 | - | 75 | - | 110 | - |
| | •14M | 10 | 11 | 9 | 116 | 22 | - | - | - | - | 56 | - | 71 | - | 86 | 116 | 146 | 201 |

| | | Clamping plates for imperial pitch belts | | | | | | | | | | | | | |
|-----------|-------|--|-----|------|-------|----|---------------------|----|----|----|----|----|----|-----|-----|
| Aluminium | Pitch | F | d | B | A | S | Belt width (inches) | | | | | | | | |
| | | | | | | | 6 | 10 | 16 | 20 | 25 | 32 | 50 | 75 | 100 |
| | | | | | | | | C | | | | | | | |
| | •T5 | 6 | 5,5 | 3,25 | 41,65 | 8 | 25 | 29 | 35 | 39 | 44 | 51 | 69 | - | - |
| | •AT5 | | | | | | | | | | | | | | |
| | •T10 | 8 | 9 | 5 | 80 | 15 | - | 35 | 41 | - | 50 | 57 | 75 | 100 | 125 |
| | •AT10 | | | | | | | | | | | | | | |
| | •T20 | 10 | 11 | 10 | 160 | 20 | - | - | - | - | 56 | 63 | 81 | 106 | 132 |
| | •AT20 | | | | | | | | | | | | | | |

• Available in customized length

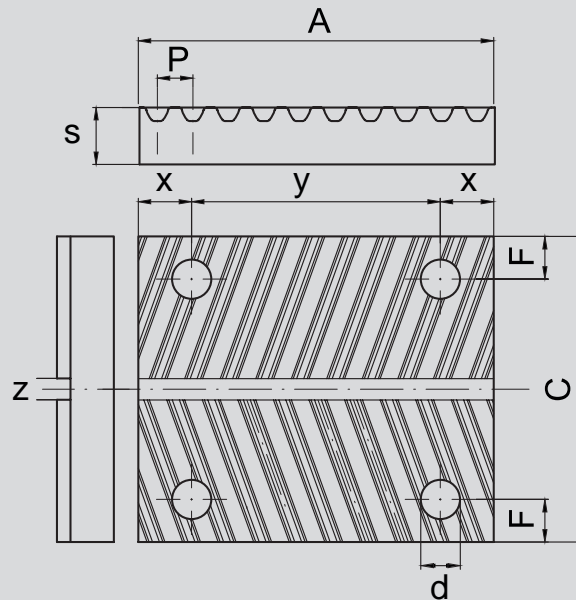

Clamping plates for QST 5

| Aluminium | Pitch | BELT'S WIDTH (mm) | F | d | A | S | x | y | z | C |
|-----------|---------|-------------------|-----------|-----|-----|----|-----|-----|----|----|
| | • QST 5 | | 12 | 6 | 5,5 | 50 | 8 | 7,5 | 35 | 3 |
| | | 24 | 6 | 5,5 | 50 | 8 | 7,5 | 35 | 3 | 43 |

Clamping plates for QST 8


| Aluminium | Pitch | BELT'S WIDTH (mm) | F | d | A | S | x | y | z | C |
|-----------|---------|-------------------|-----------|-----|----|------|------|----|----|----|
| | • QST 8 | | 16 | 7,5 | 9 | 74 | 14,5 | 13 | 48 | 3 |
| | | 25 | 8 | 9 | 74 | 14,5 | 13 | 48 | 3 | 50 |
| | | 32 | 8 | 9 | 74 | 14,5 | 13 | 48 | 3 | 57 |
| | | 50 | 8 | 9 | 74 | 14,5 | 13 | 48 | 3 | 75 |

Clamping plates for QST 14

| Aluminium | Pitch | BELT'S WIDTH (mm) | F | d | A | S | x | y | z | C |
|-----------|----------|-------------------|-----------|-----|-----|-----|----|----|----|------|
| | • QST 14 | | 35 | 9,5 | 11 | 130 | 22 | 23 | 84 | 3 |
| | | 52,5 | 9,5 | 11 | 130 | 22 | 23 | 84 | 3 | 82,5 |
| | | 70 | 9,5 | 11 | 130 | 22 | 23 | 84 | 3 | 100 |
| | | 105 | 10 | 11 | 130 | 22 | 23 | 84 | 3 | 136 |

• Available in customized length

FIXING PLATES GW

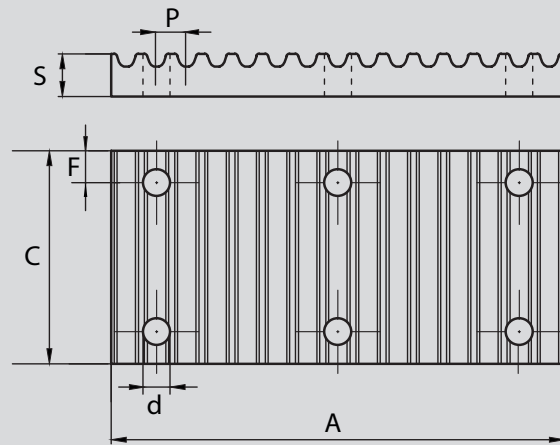

Clamping plates for GW14


| Steel | Clamping plates for GW14 | | | | | | | |
|--------------|--------------------------|--------|--------|--------|--------|--------|-------------------------|--------------|
| | BELT'S WIDTH (mm) | A (mm) | C (mm) | S (mm) | F (mm) | d (mm) | Screws UNI-EN 14399-8.8 | N° of screws |
| Pitch | 50 | 210 | 100 | 20 | 15 | 12,5 | M12 | 2X3 |
| • GW14 | 100 | 210 | 150 | 20 | 15 | 12,5 | M12 | 2X3 |
| | 150 | 210 | 200 | 20 | 15 | 12,5 | M12 | 2X5 |
| | 200 | 210 | 250 | 20 | 15 | 12,5 | M12 | 2X6 |

Clamping plates for GW20

| Steel | Clamping plates for GW20 | | | | | | | |
|--------------|--------------------------|--------|--------|--------|--------|--------|-------------------------|--------------|
| | BELT'S WIDTH (mm) | A (mm) | C (mm) | S (mm) | F (mm) | d (mm) | Screws UNI-EN 14399-8.8 | N° of screws |
| Pitch | 50 | 340 | 110 | 36 | 15 | 16,5 | M16 | 2X3 |
| • GW20 | 100 | 340 | 160 | 36 | 15 | 16,5 | M16 | 2X3 |
| | 150 | 340 | 210 | 36 | 15 | 16,5 | M16 | 2X4 |
| | 200 | 340 | 260 | 36 | 15 | 16,5 | M16 | 2X5 |

POSITIONING AND TRANSMISSION PRECISION


Backlash between belt and pulley teeth is very important for positioning and transmission synchronism.

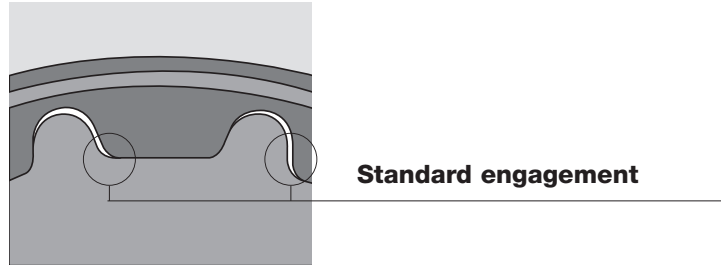

To improve transmission precision, it is possible to use zero or reduced backlash pulleys. Please note that these pulleys don't reduce the elasticity of belt teeth or cords.

Maximum recommend pulley teeth is:


- Till 100 1/min $Z = 40$
- Till 500 1/min $Z = 30$
- Till 1000 1/min $Z = 20$

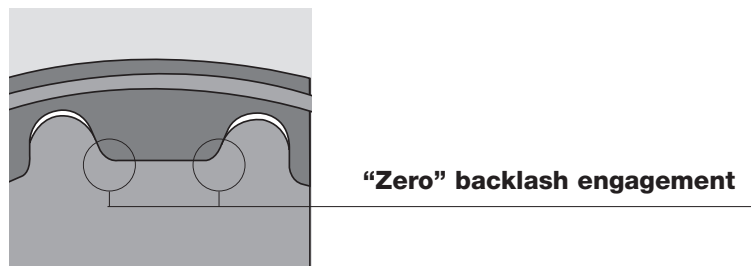

In following table there is a list of average values for backlashes:

| Available pitch for "zero" backlash pulley | T5 XL | T10 L H | T20 XH | AT5 | AT10 | AT20 |
|--|-------|---------|--------|-----|------|------|
| Average backlash value for standard | 0,6 | 1,2 | 2,4 | 0,2 | 0,4 | 0,8 |

RPP belts and pulleys offer great solution for positioning system because their parabolic profile reduces backlash and improves meshing quality.

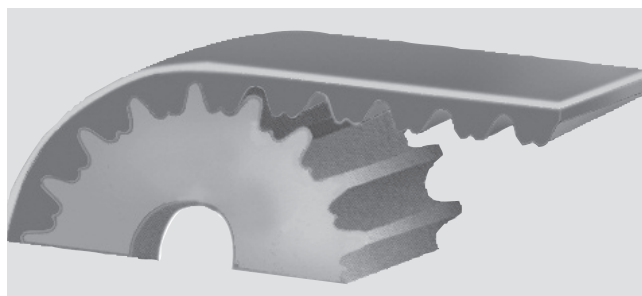

CLEATS

Megadyne timing belts can be customised with profiles vulcanised on the backside. All the cleats are made using the same thermoplastic polyurethane as the MEGALINEAR body (white PU 92 ShA).

The profiles are attached with the best technology now available, the High Vibration System.


The production process for these profiles is very flexible; Megadyne can design any profile to meet the specific requirement of the customer, in order to check and develop all the needed special profiles.

STANDARD PARALLELEPIPED PROFILES

Megadyne can produce, as standard cleats, the parallelepiped profiles, starting from a thermoplastic polyurethane strip roll and cutting until the requested profile dimension.

The t value (thickness) is available from 2 until 13 mm, the h value (height) can be from 3 until 120 mm and the width can be 150 mm maximum.

Megadyne recommend that the profile spacing were multiple of the belt pitch; in any case, for special inquiries and small quantities, it is possible to weld the profiles also in others positions; the feasible dimensions, with the standard process tolerances, are introduced in the following sketch.

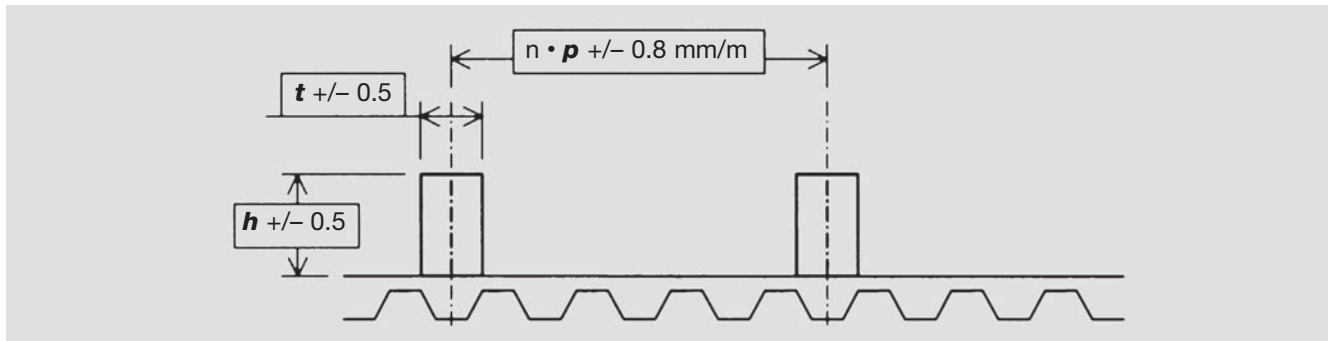

The tolerances on the position are ± 0.5 mm.

The cumulative tolerance on the spacing of the profiles is the same of the length tolerance for our standard belts (± 0.8 mm/m) (tighter tolerances are available on request).


Due to the welding process, a bead of material develops at the meeting point of profile and belt.

In any case, Megadyne always remove this welding bead.

Profile **MECHANICAL RESISTANCE**

In order to find the right cleat dimensions, please consider the following factors:

- Section base cleats resistance (**R**) becomes bigger, increasing:
 - cleats width (**w**)
 - cleats thickness (**t**)

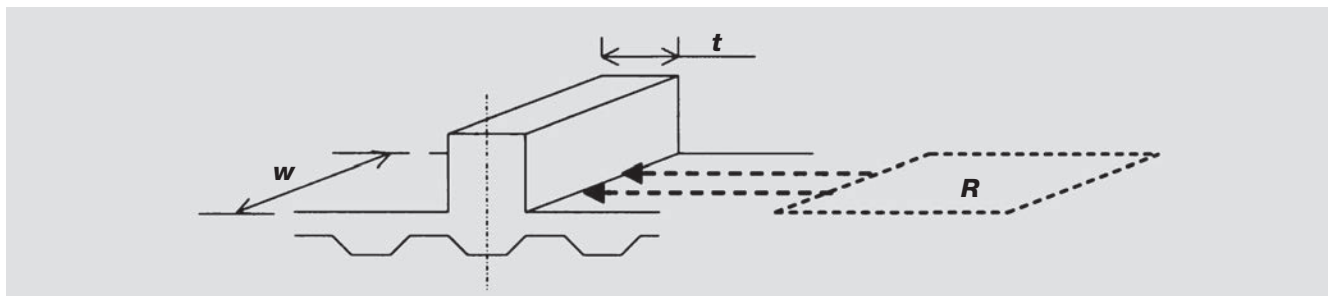



- Cleat stiffness is bigger:
 - increasing cleat thickness (**t**)
 - using special moulded profiles, like STDE0006, STDE0008, STDE0010 and STMI0012 types

MIN. N° OF PULLEY TEETH FOR BELTS WITH PROFILES

The profiles presence can change the belt flexibility properties; the two factors that affect the original flexibility are the following:


- thickness of the cleat “foot“ (size of the base). Flexibility decreases when welded area dimensions increase
- position of the welded profile on the belt. When the cleats are welded in axis with the teeth, belt flexibility is better than when cleats are welded in axis with the little nose.

Please find, in the following table, flexibility properties for the cleated belts.

| MINIMUM NUMBER OF PULLEY TEETH | | | | | | | | | | | | | |
|--------------------------------|----|----|---|----|----|-----|-------------------------|----|----|---|----|-----|----|
| CLEATS OVER A TOOTH | | |  | | | | CLEATS NOT OVER A TOOTH | | |  | | | |
| CLEATS THICKNESS | 4 | 5 | 6 | 8 | 10 | 12 | CLEATS THICKNESS | 4 | 5 | 6 | 8 | 10 | 12 |
| XL | 18 | 18 | 25 | 40 | 50 | 100 | XL | 45 | 45 | 50 | 60 | 100 | - |
| L | 12 | 12 | 18 | 30 | 40 | 60 | L | 40 | 40 | 45 | 55 | 60 | 80 |
| H | 14 | 14 | 14 | 18 | 25 | 45 | H | 25 | 25 | 30 | 45 | 50 | 65 |
| XH | 18 | 18 | 18 | 28 | 18 | 20 | XH | 20 | 20 | 30 | 40 | 45 | 54 |
| T5 / AT5 | 18 | 18 | 25 | 40 | 50 | 100 | T5 / AT5 | 45 | 45 | 50 | 60 | 100 | - |
| T10 / AT10 | 14 | 14 | 14 | 18 | 25 | 45 | T10 / AT10 | 30 | 30 | 40 | 45 | 50 | 65 |
| T20 / AT20 | 18 | 18 | 18 | 18 | 18 | 20 | T20 / AT20 | 20 | 20 | 30 | 40 | 45 | 54 |
| RPP5 | 18 | 18 | 25 | 40 | 50 | 100 | RPP5 | 45 | 45 | 50 | 60 | 100 | - |
| RPP8 | 14 | 14 | 14 | 18 | 25 | 45 | RPP8 | 30 | 30 | 40 | 45 | 50 | 65 |
| RPP14 | 18 | 18 | 18 | 18 | 18 | 20 | RPP14 | 20 | 20 | 30 | 40 | 45 | 54 |

STANDARD PARALLELEPIPED PROFILES WITH HOLES

Parallelepiped profiles are available also with holes, to satisfy specials applications; please find below the standard tolerances for this kind of cleats.

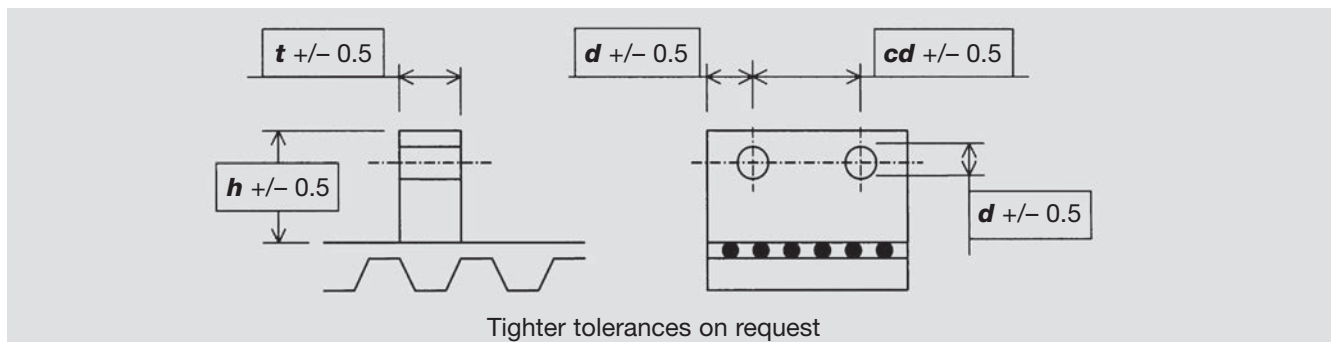















For belt flexibility and mechanical resistance, please kindly refer to values for cleats without holes.

MOULDED CLEATS














Using an high performance injection system, Megadyne can produce any profile designed by the customer. For cleats not yet present in following pages, Megadyne can produce dedicated mould according customer requirements. For belt flexibility and mechanical resistance, please kindly refer to standard parallelepiped profiles section.

CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.








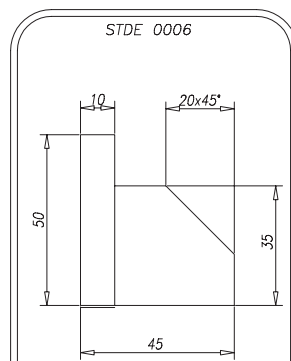






If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.

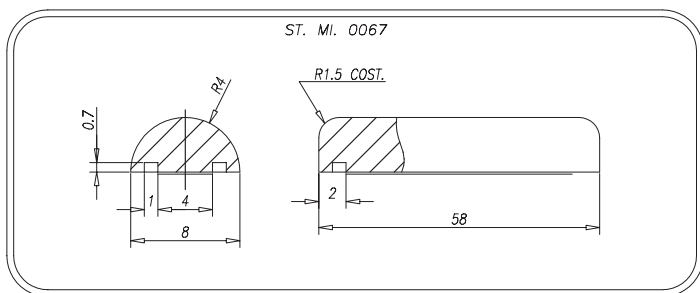
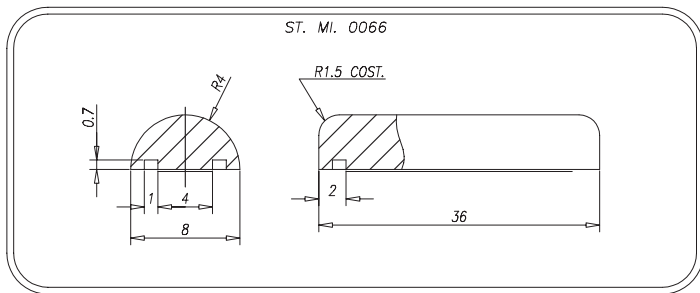











CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.






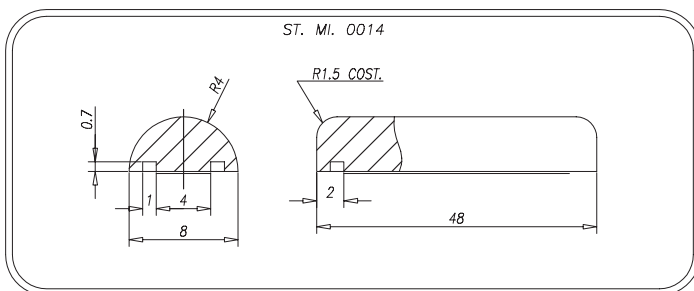
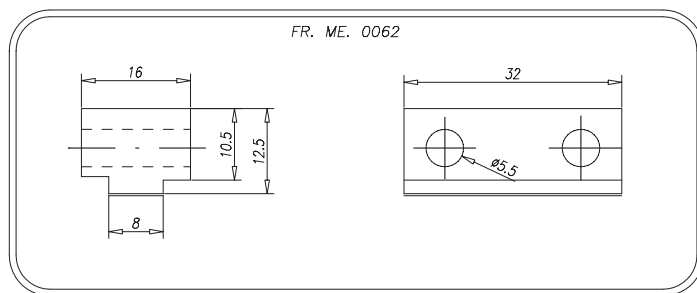


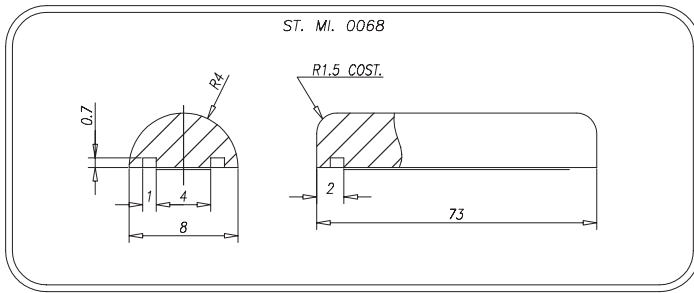


If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.



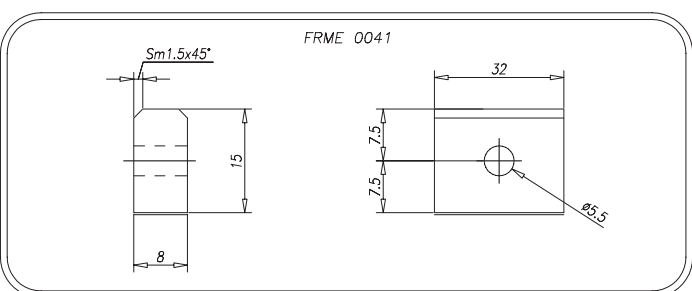
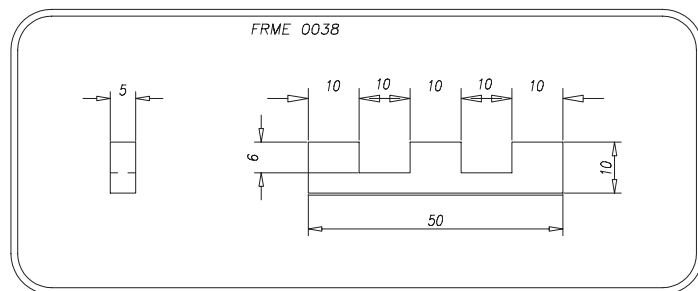

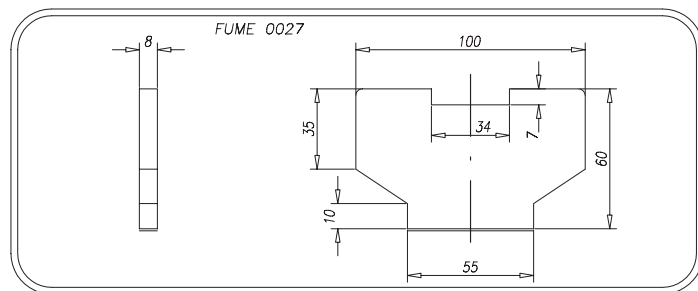

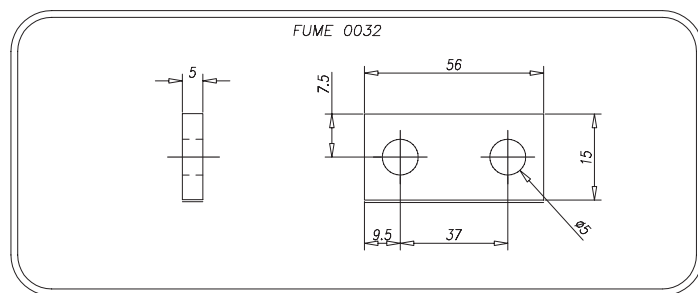






CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.



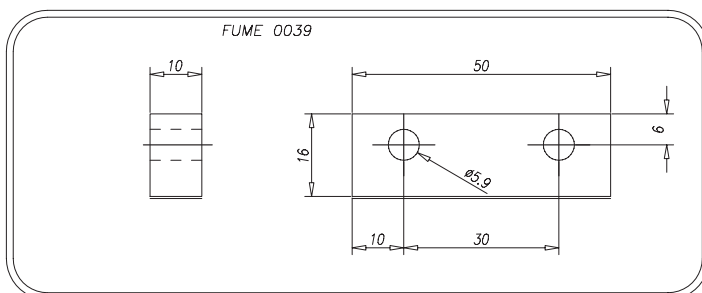

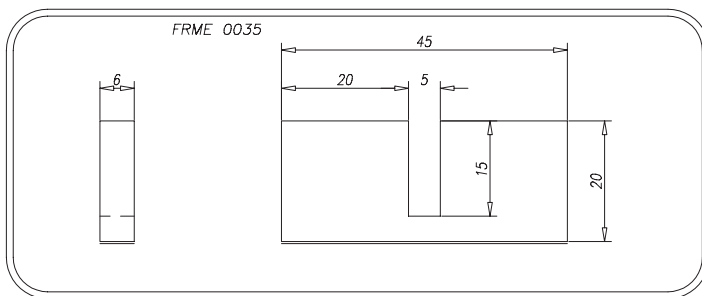

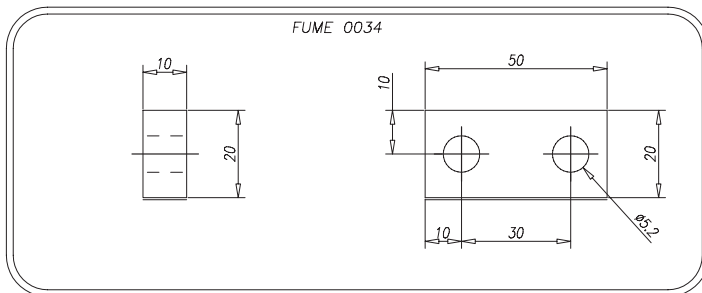

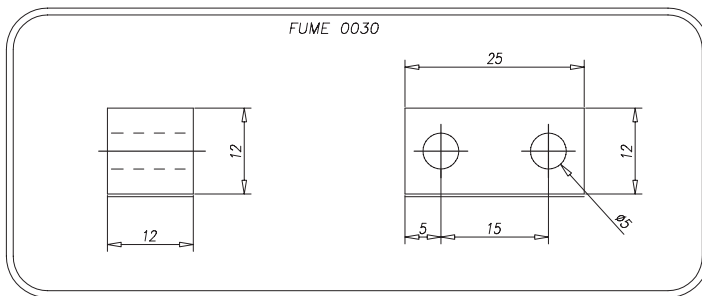

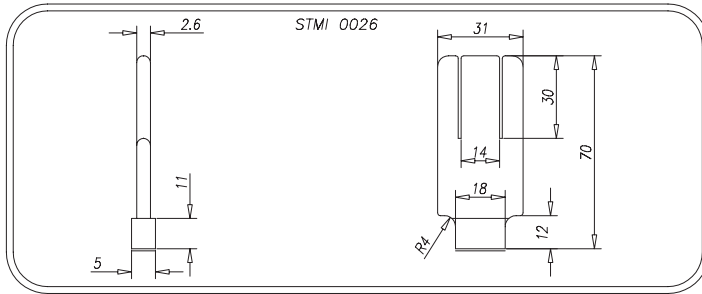


If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.







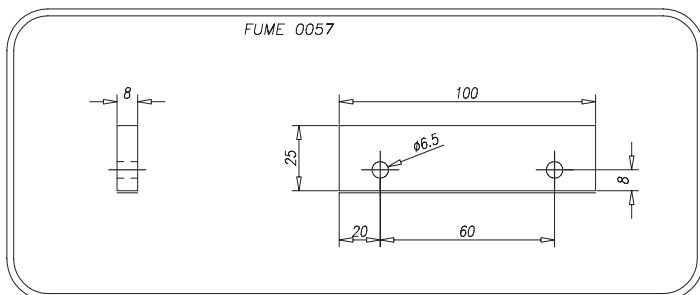

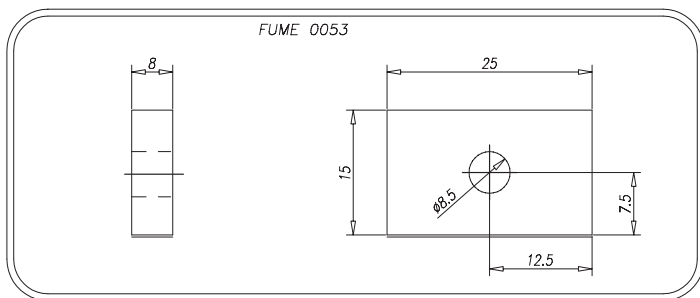

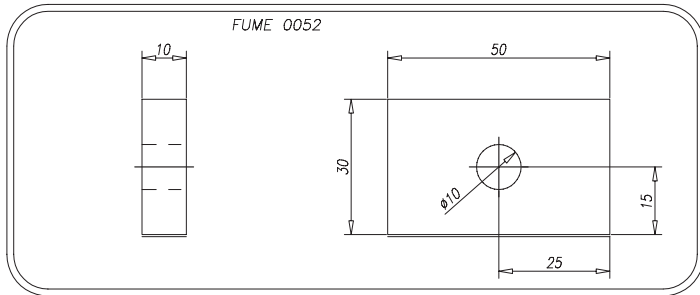


CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.








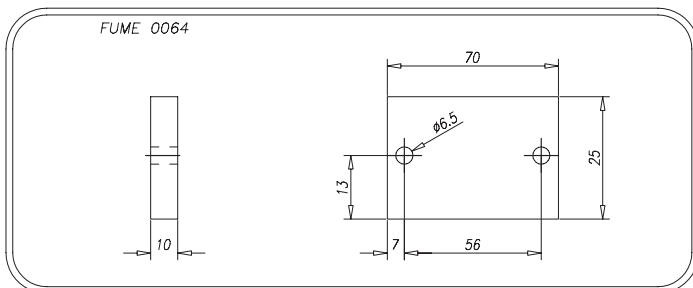
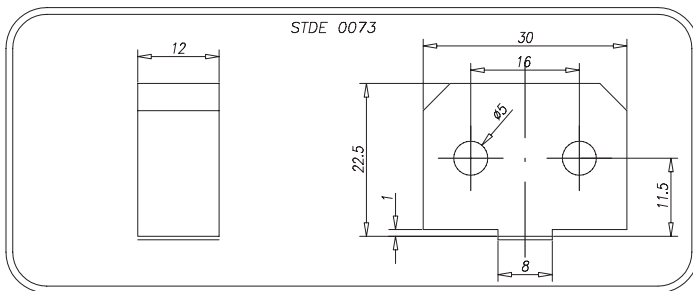
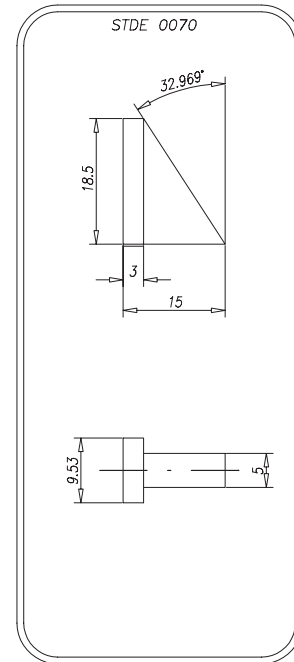
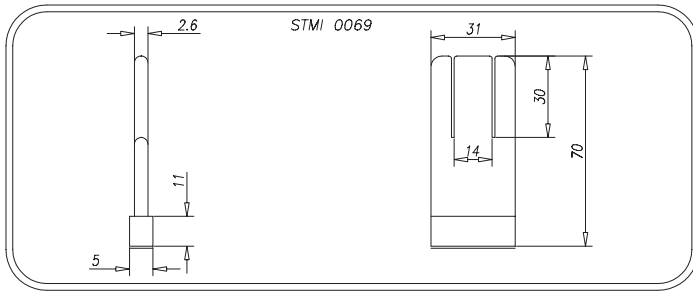


If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.



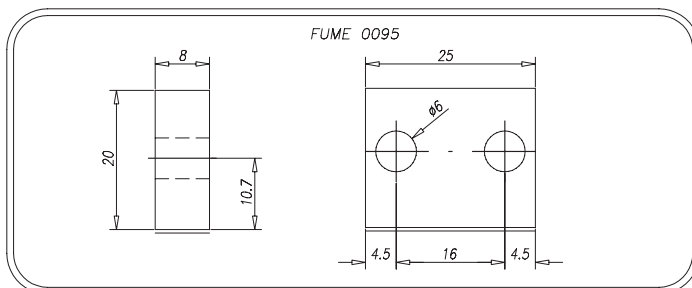

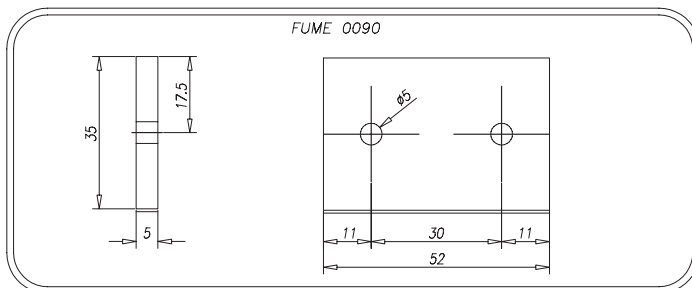

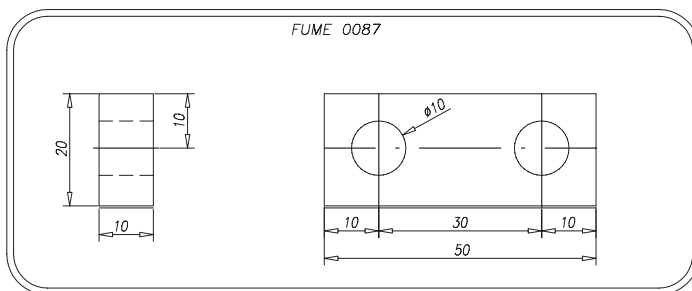

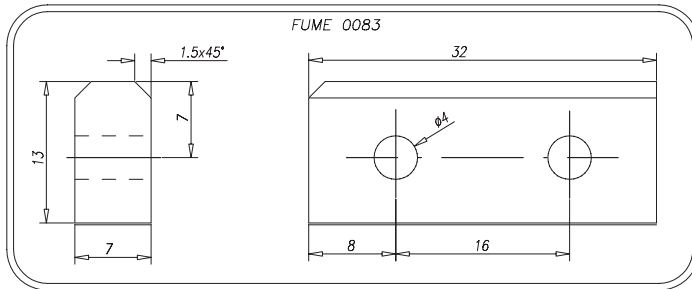


CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.

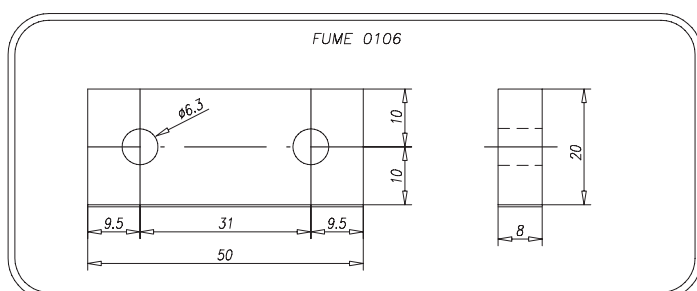

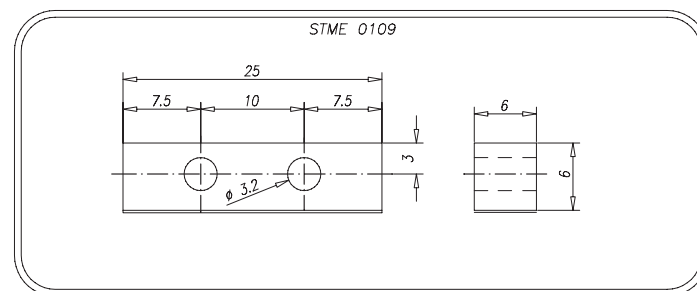

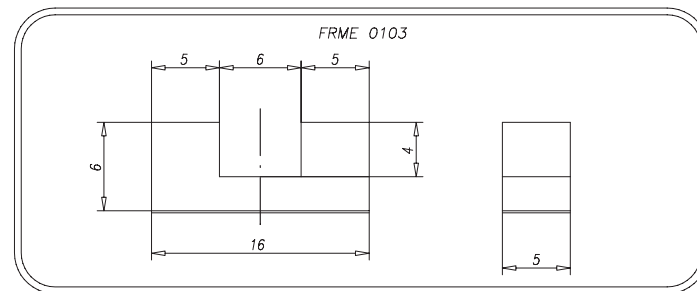



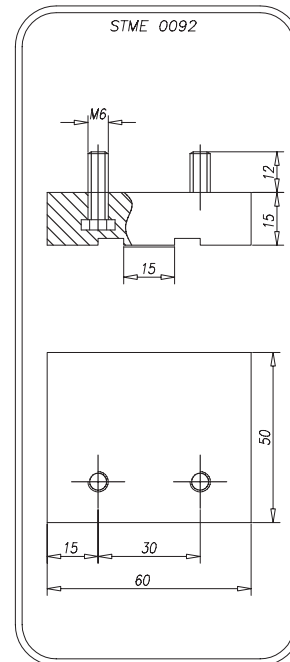




If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.

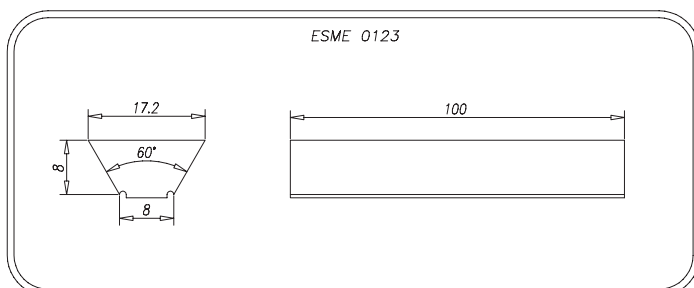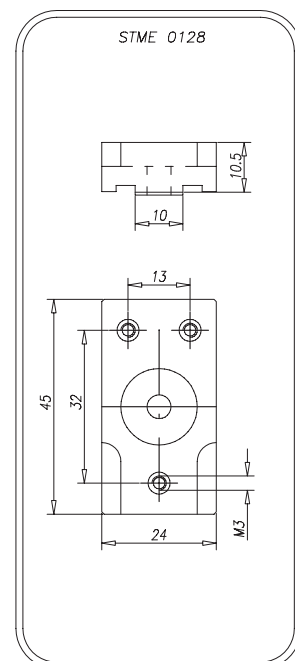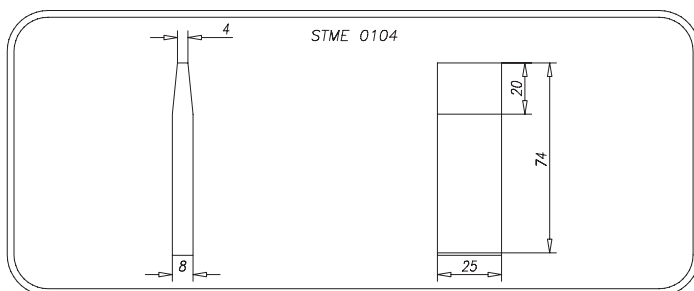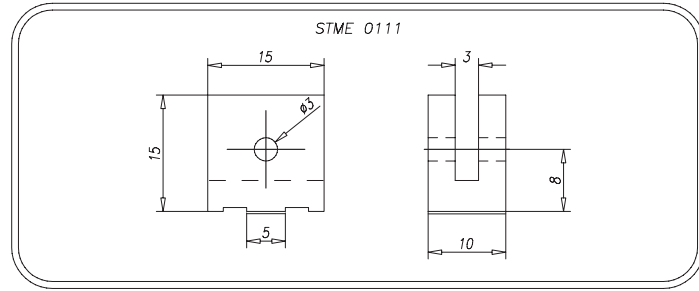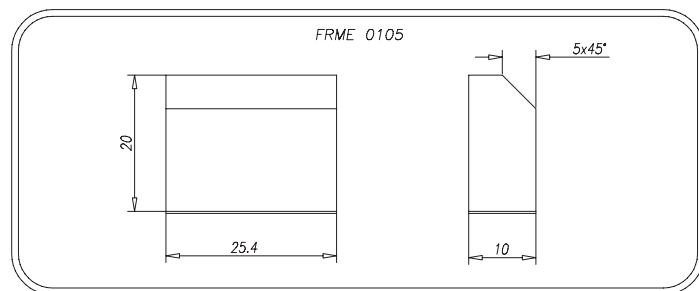

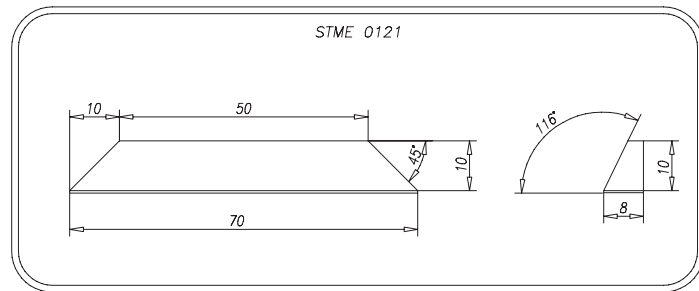



CLEATS

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.

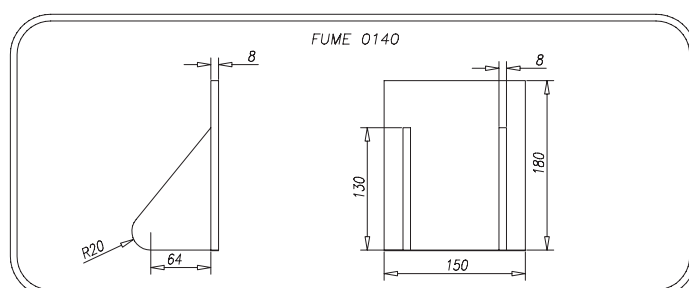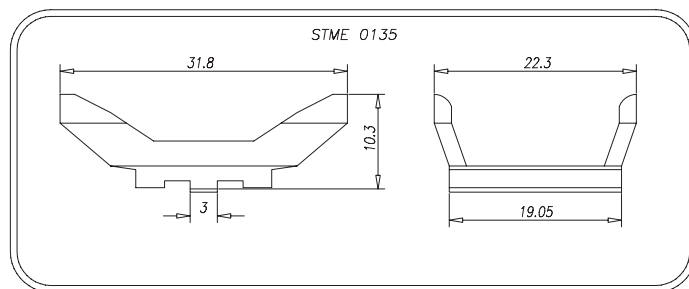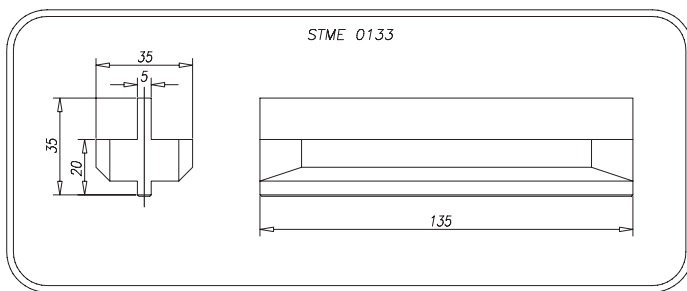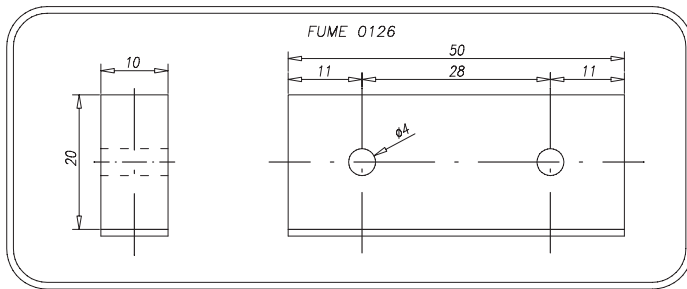

If the needed cleat wouldn't yet present in the following tables, please contact MEGADYNE staff.

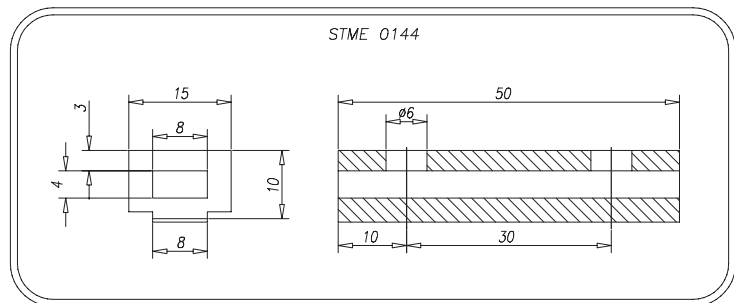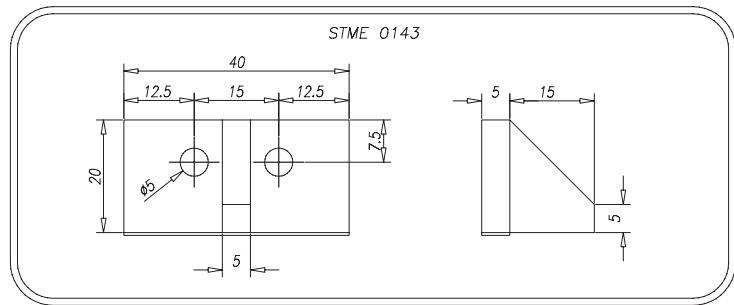

COVER PROPERTIES

Megalinear belt can be coated with several materials. Those coatings are able to suit Megalinear belts to all applications. Main advantages for using coated belts are: reducing noise and modifying friction in conveying materials. Choice of correct coating depends on application field.

Megadyne is able to supply extruded coated belt, in this case coating method is same as belt production method and cohesion between belt and cover is guaranteed by welding without using glue.

Properties of extruded coating are followings:

| | Cover type | | | | | | | | |
|--|-----------------------|------------------------|--------------|--------------|--------------|---------------------|------------------|--------------|--------------|
| | NFB nylon fabric back | NFT nylon fabric teeth | AVAFC 60 | AVAFC 70 | AVAFC 85 | Foamed polyurethane | APL | Fishbone | Ribbed |
| Raw material | nylon | nylon | polyurethane | polyurethane | polyurethane | foamed polyurethane | polyurethane/PVC | polyurethane | polyurethane |
| Hardness (ShA) | – | – | 60 | 70 | 85 | 50 | 55 | 70 | 70 |
| Colour | green | green | transparent | transparent | transparent | yellow/grey | red | transparent | transparent |
| Coating and belt cohesion method | by extrusion | by extrusion | by extrusion | by extrusion | by extrusion | by spray | by extrusion | by extrusion | by extrusion |
| Thickness range (mm) | – | – | 2/3/4 | 2/3/4 | 2/3/4 | 0,5 till 8 | 3,5 | 4,3 | 2,7 |
| Tolerance on coating thickness | – | – | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,5 | +/- 0,5 |
| Working temperature range (°C) | -20 +80 | -20 +80 | -20 +80 | -20 +80 | -20 +80 | -20 +60 | -20 +60 | -20 +80 | -20 +80 |
| Friction coefficient ⁽¹⁾ | 0,25 | 0,25 | 0,65 | 0,65 | 0,6 | 0,4 | 0,7 | 0,6 | 0,6 |
| Water resistance | good | good | very good | very good | very good | good | good | very good | very good |
| Abrasion resistance | intermediate | intermediate | very good | very good | very good | very good | good | very good | very good |
| Oil resistance | intermediate | intermediate | good | good | good | very good | good | very good | very good |
| FDA approved | no | no | no | no | no | no | no | no | no |
| Min. pulley dia = thickness • ... ⁽²⁾ | std pulley | std pulley | x 40 | x 40 | x 40 | x 25 | x 30 | x 30 | x 35 |



(1) Static Average values for steel guides

(2) Suggested diameter is bigger value between this calculated value and minimum pulley diameter on belt data page

Megalinear belt can be supplied also with vulcanised or glued cover. Their technical properties are listed in following table:

| Cover type | | | | | | | | | | |
|---------------|---------------------------|----------------|------------------|------------------|--------------------------------|------------------|------------------------------|------------------|------------------|----------------|
| PVC Supergrip | Porol mousse | Linatex | Tenax 40 | Tenax Standard | White Rubber for food industry | Neoprene | Gummy Correx ambra parablond | NBR | Hypalon | Honeycomb |
| PVC | open cell neoprene rubber | natural rubber | natural rubber | natural rubber | synthetic rubber | synthetic rubber | natural rubber | nitrilic rubber | rubber | natural rubber |
| 55 | 10 | 42 | 40 | 45 | 70 | 70 | 48 | 70 | 60 | 50 |
| green | black | red | red | red | white | gray/black | light/brown | white | white | red |
| by extrusion | by gluing | by gluing | by vulcanization | by vulcanization | by vulcanization | by vulcanization | by vulcanization | by vulcanization | by vulcanization | by gluing |
| 4,5 | 2 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 0,8 till 15 | 4,5 till 15 |
| +/- 0,5 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,3 | +/- 0,5 |
| - 20 +60 | -10 +60 | -20 +50 | -20 +60 | -20 +60 | 0 +120 | -10 +100 | -20 +60 | 0 +120 | 0 +160 | -20 +60 |
| 0,6 | 0,7 | 0,75 | 0,75 | 0,7 | 0,65 | 0,6 | 0,6 | 0,6 | 0,6 | 0,6 |
| good | good | very good | very good | very good | good | very good | very good | good | good | very good |
| good | intermediate | very good | very good | very good | intermediate | good | very good | intermediate | intermediate | very good |
| good | intermediate | low | low | low | good | good | low | good | good | low |
| no | no | no | no | no | no | no | no | no | no | no |
| x 30 | x 25 | x 30 | x 30 | x 30 | x 35 | x 35 | x 30 | x 35 | x 35 | x 30 |



SPECIAL EXECUTION FEASIBILITY

Megadyne can make special extrusion on customer request to improve belt properties and to suit better to special applications.

SPECIAL POLYURETHANE

On customer request and with minimum quantity, Megalinear belt can be produced with different hardness:

- 85 ShA food quality polyurethane for contact with food and medical products
- 92 ShA higher resistance to temperature
- 92 ShA silicon free for painting system based on water
- 95 ShA glass reinforced
- 98 ShA extra hard polyurethane

COLOUR

On customer request and with a minimum quantity is possible to produce megalinear with several colours.

Different colour doesn't influence belt technical properties so mechanical features are same as standard white belt.

Available colours are: • White • Black • Blue • Yellow • Transparent

SPECIAL EXTRUSION

On customer request, Megadyne R&D department can develop special extruded belts by designing special mould.

It is also possible to extrude standard belt with special cords position, ready for successive reworkings.

MECHANICAL REWORK

Megadyne have been producing specialized belting for many years. Our in-house facilities enable us to produce belt with special holes for vacuum conveyors, belts with special backings / ground finishes for high tolerance applications. We can remove individual teeth and perforate the timing belt as required.

BACK GRINDING

A belt back can be ground to achieve a precise belt thickness as an adjunct to precision drives. When belt back grinding to a tolerance is required, the total thickness, including the tooth, must be specified. A grinding tolerance of ± 0.2 mm is achievable with a level finish (i.e. thickness will not vary greatly around the belt). Most widths and lengths are available.

LONGITUDINAL REWORK

Longitudinal rework along the belt back is possible on covered and uncovered belts. The profile can be machined precisely for required function. The measurement is given as the depth on the belt back. Most widths and lengths are available.

REWORK ON BELT TEETH

The rework of the tooth profile can be very useful, i.e. improving the steering effect with guide rails. The rework dimension is given from the top of the tooth. Most belt widths and lengths are available.

HOLES IN TIMING BELTS

Holes in timing belts can be for vacuum or air film conveying or as clearance for assembly mechanisms. Stops and cams can be attached through the holes. Customized tooling may be required depending on the layout and dimensions of holes required.

SINGLE TOOTH REMOVAL

Single and multiple tooth removal is available to your requirement, for applications in handling and conveying technology.

CERTIFIED BELTS FOR DIRECT FOOD CONTACT (MEGALINEAR FCM)


On customer request and with minimum quantity, it is possible to produce Megalinear belts

approved and certified for direct contact with dry and wet food according to EC 10/2011 and EC 1934/2004 regulations, and limited to the following configuration:

- 92 \pm 4 ShA special grade polyurethane, sky blue colour (RAL 5012 reference)
- Stainless steel cord insert only
- NFT\FNB fabric and covers options NOT available
- Available profiles T5-T10-T20-AT5-AT10-AT20-H-STD8-ATG10

ANTISTATIC POLYURETHANE TIMING BELTS

Megadyne now offers antistatic belts. Under certain conditions, a polyurethane belt may build-up a significant static electric charge. For applications where belts are intended for operation in a potentially explosive atmosphere or near electrical components, polyurethane belts should be sufficiently conductive to dissipate this electrical charge. Belts can be constructed (using proper nylon fabric coating) with a relatively low electrical resistance characteristic and are typically referred to as “static conductive” surface or “antistatic” surface. The test methods for determining the surface resistive properties of a belt are based on ISO 9563, “Belt Drives - Electrical Conductivity of Anti-static Endless Synchronous Belts - Characteristics and Test Method”. To be antistatic the electrical resistance, in ohms, of a belt measured in accordance with test method of norm ISO 9563, should not exceed:

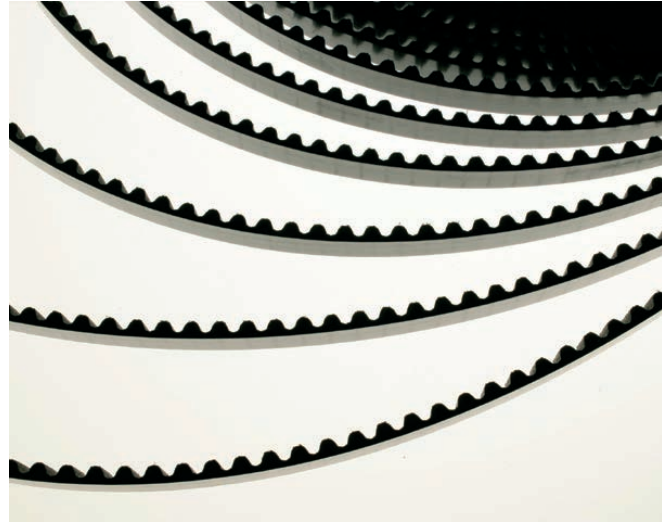


$$\text{Resistance} = \Omega = \frac{(6 \cdot 10^5) \cdot L}{W}$$

where: L = is dry distance between electrodes (7 grooves, 6 teeth between contacts)
W = is the width of the belt

L and W are expressed in the same units (mm or inches).

Megadyne antistatic belts are produced with black polyurethane as standard.

TYPICAL APPLICATIONS

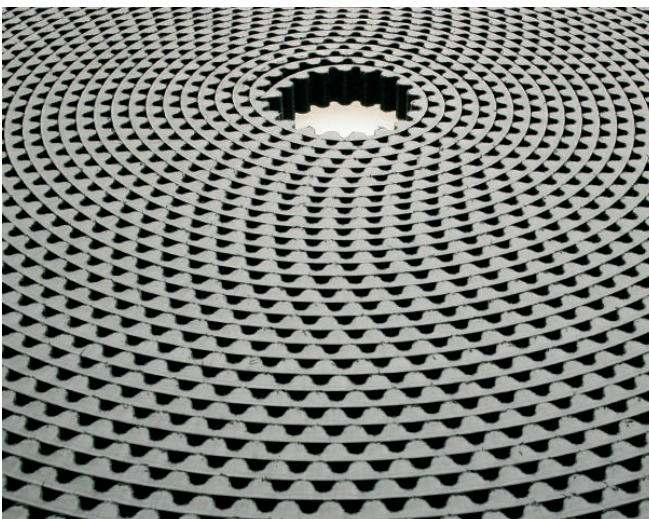


- Conveyance of PC boards or other electronic assemblies
- Semiconductor processing
- Conveying munitions of explosive detonators
- Paper conveying
- Power transmission applications in textile industries
- Chemical environment power transmission or conveying
- Clean room conveyors and power transmissions

SPECIAL EXECUTION PHOTOS


Glass Industry

Coating and special grinding on the back allow Megadyne belt to be suitable to all customer applications

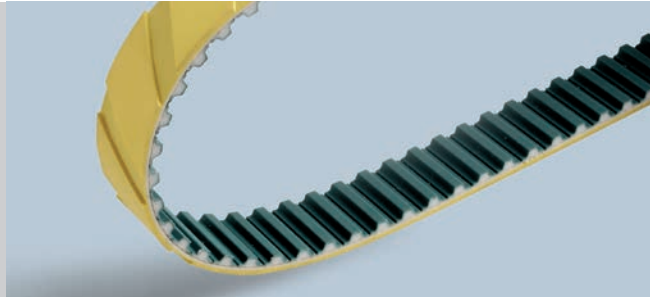


Tobacco industry

Belt with special cleats for tobacco industry

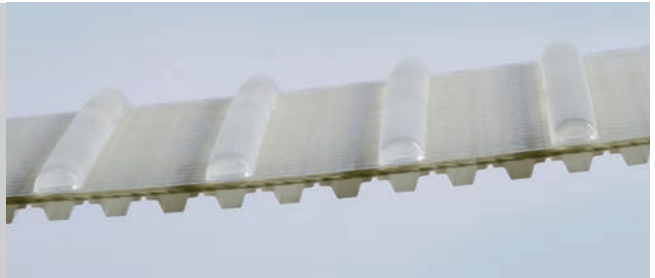


Nappy industry

Wide extruded belt for nappy industry

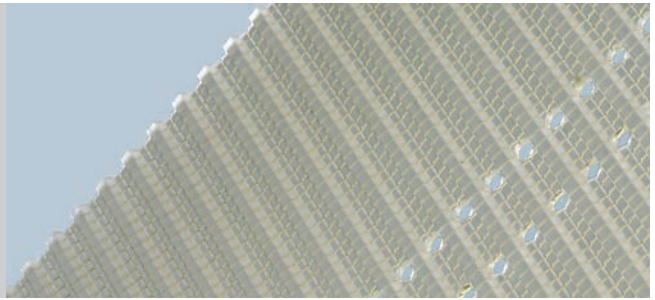

Packaging industry

Special reworking to install custom made elements

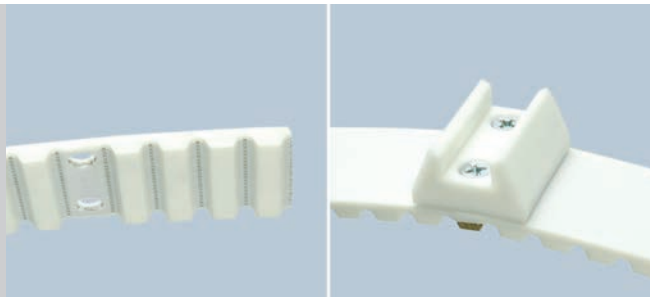

Automotive industry

Belt suitable to convey steel coils and plates due to guides on the back




Paper industry

Special extruded belt for vacuum conveyor application in paper industry



Carton Industry

New extruded belt
for vacuum application
in carton conveyor industry

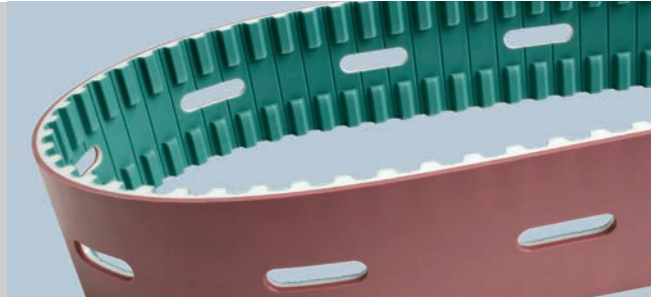


Conveyor application

Special coating for conveyor application




Automotive industry

Due to its antistatic properties,
belt suitable for steel plate conveyor
in car industry

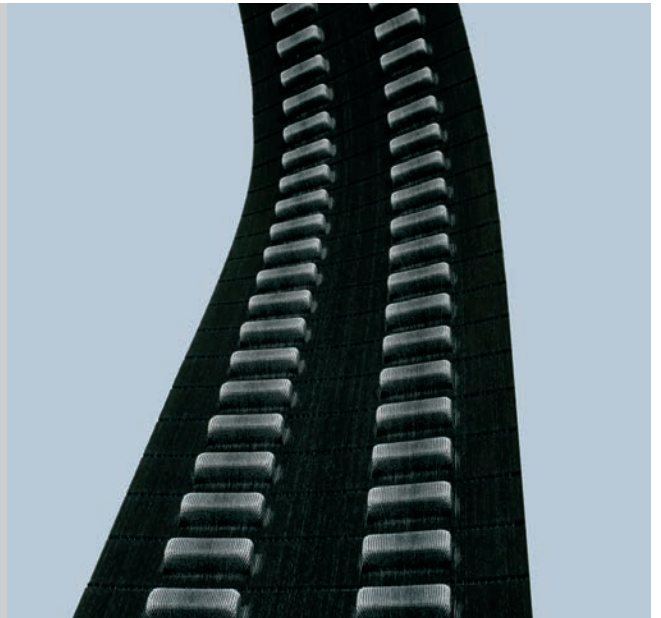


Lift industry

Patented belt
designed on customer requirement
for an innovative lift system

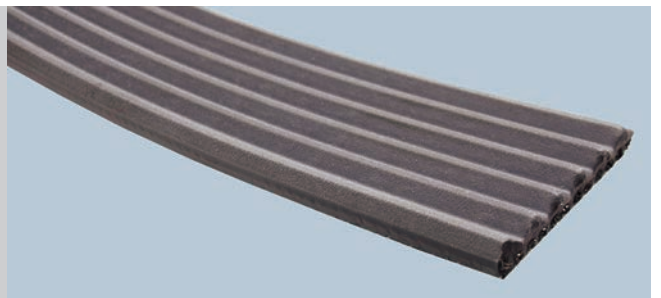

Fish industry

High variety of cleats allow
Megalinear belts to work
in several fields

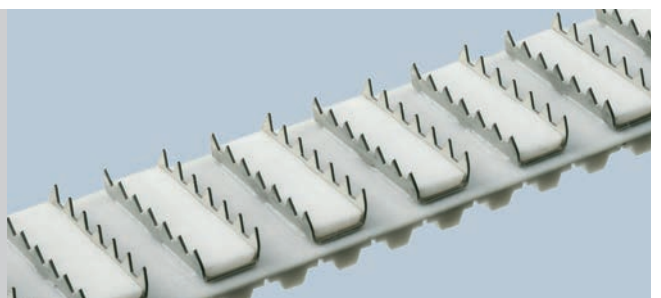

DATA SHEET


CUSTOMER DATA

Date ___/___/___

Company Name _____
 Address _____ Zip Code _____
 City _____ State _____ Country _____
 Customer Name/Surname _____
 Office _____ Tel. _____ Fax _____
 e-mail _____


DRIVE INFORMATION TRANSMISSION LAYOUT

Conveyor

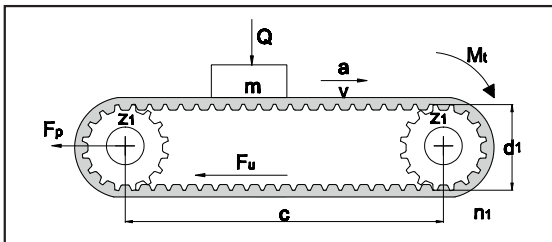

Linear motion (choose between the layout below)

Other (If layout is different please sketch it below)

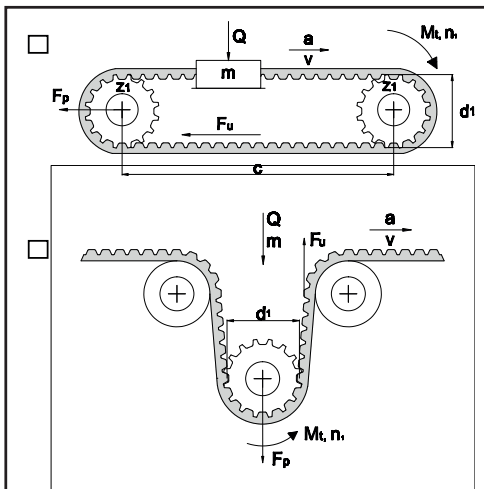

DRIVE INFORMATION (FOR CONVEYOR)

APPLICATION:

Driver pulley 's diameter: _____
 Driven pulley's diameter: _____
 Center distance: _____
 Minimum safety factor needed: _____
 Are there any size limitation? Yes No
 (if yes please indicate):
 Max diameter: _____
 Max width: _____
 Max center distance: _____
 Linear speed: _____
 Acceleration: _____
 Mass: _____

Is there any sliding surface? Yes No
 (if yes please indicate friction coefficient):

Is there any cover on the back? Yes No
 (if yes please indicate the type)

Are cleats required? Yes No
 (if yes please indicate cleats code, otherwise attach drawings)

Working time: < 8h From 8h up to 16h 24h

The data and information contained in the present catalogue are up-to-dated to the date of the catalogue's printing. Megadyne Spa reserves the right to modify the specifications, performances and other information relating to the belts described in the present catalogue, at any time at its own discretion, without any prior notice. For updating refer to our web site www.megadynegroup.com.

Technical specifications, performances and other information provided in the present catalogue are indicative and do not bound Megadyne unless such specifications, performances or other information are expressly agreed in the agreement with the customer.

We also recommend to read carefully the following documents in our web site www.megadynegroup.com:

- Megadyne General Conditions of Sale (comprising the warranty)
- Theoretical Belt Life
- Drive Components: Storage, Installation, Maintenance and Troubleshooting Handbook
- Belts standard use condition and temperature.

Copyright Notice: Megadyne Spa copyright. All rights reserved. Megadyne is and shall remain the owner of all rights on drawings, technical specifications and any other information contained in the present catalogue or otherwise communicated by Megadyne Spa to the customer. The customer shall not disclose such information to third parties or use such information for purposes different from the definition of the order to Megadyne Spa, unless upon prior written authorization of Megadyne.



Megadyne S.p.A.
Italy - MATHI

BELARUS

Minsk
Phone +375 17 2802486
Info.ee@megadynegroup.com

BRASIL

Sorocaba
Phone +55 15 2101 7700
inquiries@jasonindustrial.com

CANADA

Edmonton
Phone: +1 780 461 4400
inquiries@jasonindustrial.com

Montreal
Phone: +1 514 31 2341
inquiries@jasonindustrial.com

Toronto
Phone: +1 905 602 4400
inquiries@jasonindustrial.com

CHINA

Beijing
Phone +86 10 8150 7478
info.cn@megadynegroup.com

Foshan
Phone +86 757 83815530
info.cn@megadynegroup.com

Fujian
Phone +86 595 8816 0309
info.cn@megadynegroup.com

Ningbo*
Phone +86 574 8650 2886
info.cn@megadynegroup.com

Qingdao*
Phone +86 532 8765 2117
info.cn@megadynegroup.com

Shanghai
Phone +86 21 5447 1473
info.cn@megadynegroup.com

Shenyang
Phone +86 24 2572 3238
info.cn@megadynegroup.com

COLOMBIA

Cartagena
Phone: 011 57 313 501 5397
inquiries@jasonindustrial.com

CZECH REPUBLIC

Prague
Phone +420 2 8481 7181
office.cz@megadynegroup.com

FRANCE

Paris
Phone +33 1 6079 8200
info.fr@megadynegroup.com

St. Jean De Maurienne*
info.fr@megadynegroup.com

GERMANY

Borchen
Phone +49 5251 8735 0
info.de@megadynegroup.com

Elchingen*
produktion@megadynegroup.com

HUNGARY

Budapest
Phone +36 23 428 628
info.hu@megadynegroup.com

INDIA

CHENNAI*
Phone +91 98841 81175
sales@helicord.in

ITALY

Turin*
Phone +39 011 926 8052
info@megadynegroup.com

Milan*

Phone +39 039 689 601
info@samplabelting.com

MEXICO

Mexico C.P.
Phone +52 55 5587 3680
inquiries@jasonindustrial.com

POLAND

Bydgoszcz*
Phone +48 52 348 77 12
info.pl@megadynegroup.com

SOUTH AFRICA

Johannesburg
Phone +27 (0)12 661 1652
sales-za@megadynegroup.com

Cape Town

Phone +27 (0)21 9820772
sales-za@megadynegroup.com

SPAIN

Barcelona*
Phone +34 93 811 5450
info.sp@megadynegroup.com

SWEDEN

Kristianstad
Phone +46 10 1309600
info.se@megadynegroup.com

THAILAND

Bangkok
Phone: +66 (0) 27115477
info.apac@megadynegroup.com

TURKEY

Izmir*
Phone +90 232 877 07 00
info@rultrans.com.tr

U.K.

Birmingham
Phone: +44 1384 215 021
sales@megadynegroup.com

U.S.A

California
Phone +1 323 265 8061
inquiries@jasonindustrial.com

Florida
Phone +1 813 241 4111
inquiries@jasonindustrial.com

Georgia*
inquiries@jasonindustrial.com

Illinois
Phone: +1630 752 0600
inquiries@jasonindustrial.com

New Jersey Americas HQ
Phone +1 973 227 4904
inquiries@jasonindustrial.com

New York*
Phone +1 716 667-7450
info@sampla.com

North Carolina*
inquiries@jasonindustrial.com

Oregon
Phone +1 888 231 7224
inquiries@jasonindustrial.com

South Carolina*
inquiries@jasonindustrial.com

Texas
Phone +1 972 438 6992
inquiries@jasonindustrial.com

HEADQUARTERS

ITALY Turin
Via S. Lucia, 114
10075 Mathi (Torino)
Phone +39 011 926 8052
info@megadynegroup.com

www.megadynegroup.com
www.jasonindustrial.com
www.samplabelting.com