
Flow monitoring Immersion sensor without integrated processor FCS-G1/4A4-NAEX-H1141

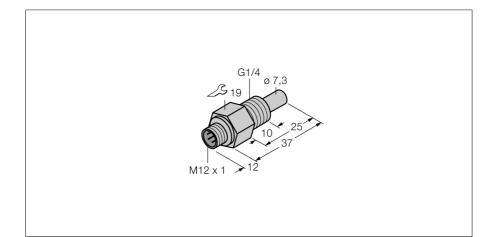

Type designation Ident no.

Mounting conditions Water Operating Range Oil Operating Range Stand-by time Switch-on time Switch-off time Temperature jump, response time Temperature gradient Medium temperature

Device designation ignition protection category PowerP, Internal inductances/capacitances Ex approval acc. to conformity certificate Protection class

Housing material

Sensor material Max. tightening torque housing nut Electrical connection Pressure resistance Process connection FCS-G1/4A4-NAEX-H1141 6870341

insertion style sensor

1...100cm/s

3...200 cm/s

max. 12 s

typ. 8 s (2...18 s)

typ. 2 s (1...13 s)

typ. 2 s (1...15 s)


Stainless steel, V4A (1.4571) stainless steel, AISI 316Ti 30 Nm Flange connector, M12 x 1 60 bar G ¼"

- ATEX category II 2 G, Ex Zone 1
 - Ex flow sensor for liquid media
- Calorimetric principle

÷.

- Adjustment via signal processor
- Status displayed via signal processor
- Intrinsically safe EEx ib IIC T6, for use in zone 1
- Plug-in device, M12 x 1
- 4-wire connection to an Ex0 processor

Wiring Diagram



Functional principle

Our insertion - flow sensors operate on the principle of thermodynamics. The measuring probe is heated by several °C as against the flow medium. When fluid moves along the probe, the heat generated in the probe is dissipated. The resulting temperature is measured and compared to the medium temperature. The flow status of every medium can be derived from the evaluated temperature difference. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media.



Automation

Industrial

Flow monitoring Immersion sensor without integrated processor FCS-G1/4A4-NAEX-H1141



Industrial Automation

Operating manual

Intended use

This device fulfills the directive 2014/34/EC and is suited for use in explosion hazardous areas according to EN50014 and EN50020. In order to ensure correct operation to the intended purpose it is required to observe the national regulations and directives.

For use in explosion hazardous areas conform to classification

II 2 G (Group II, Category 2 G, electrical equipment for gaseous atmospheres).

Marking (see device or technical data sheet)

₪ II 2 G and EEx ib IIC T6 acc.to EN50020

Installation / Commissioning

These devices may only be installed, connected and operated by trained and qualified staff. Qualified staff must have knowledge of protection classes, directives and regulations concerning electrical equipment designed for use in explosion hazardous areas. Please verify that the classification and the marking on the device comply with the actual application conditions.

This device is only suited for connection to approved Exi circuits compliant to EN60079-0 and -11. Please observe the maximum admissible electrical values.

After connection to other circuits the sensor may no longer be used in Exi installations. When interconnected to (associated) electrical equipment, it is required to perform the "Proof of intrinsic safety" (EN60079-14).

Installation and mounting instructions

Avoid static charging of cables and plastic devices. Please only clean the device with a damp cloth. Do not install the device in a dust flow and avoid build-up of dust deposits on the device.

If the devices and the cable could be subject to mechanical damage, they must be protected accordingly. They must also be shielded against strong electro-magnetic fields.

The pin configuration and the electrical specifications can be taken from the device marking or the technical data sheet.

In order to avoid contamination of the device, please remove possible blanking plugs of the cable glands or connectors only shortly before inserting the cable or opening the cable socket.

service / maintenance

Repairs are not possible. The approval expires if the device is repaired or modified by a person other than the manufacturer. The most important data from the approval are listed.